


REV. 2
DCO 142340

| | |
|-----------------|---------------------------|
| COIL: @ 25°C | |
| RESISTANCE | 210 OHMS ± 10% |
| NOMINAL VOLTAGE | 12.0 VDC |
| MUST OPERATE | 5.4 VDC |
| MUST RELEASE | 3.2 VDC MAX. 0.6 VDC MIN. |

CUSTOMER DATA SHEET

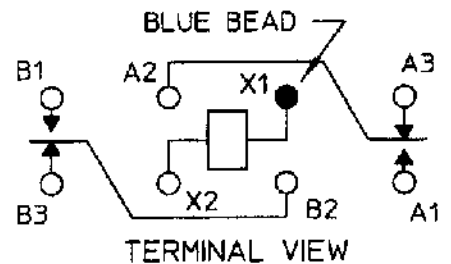

ENVIRONMENT:

| | | | | | | |
|-------------|-----|--------|------|--------------|----|-----|
| VIBRATION | 10 | CPS TO | 3000 | CPS @ | 30 | g's |
| SHOCK | 75 | g's | 6 | MS. DURATION | | |
| TEMPERATURE | -65 | °C TO | +125 | °C | | |

| | |
|-----------------|-------------------------|
| CONTACT RATING: | LOW LEVEL TO |
| | 2 AMPS 28 VDC RESISTIVE |
| | 50,000 OPERATIONS |

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.

DR. R.B. 3/21/97 CK. *Vio/Olson*



CUST. QPL
CUST. NO. M39016/13-056M REV. "3SBC" RELAY

3SBC1517A2