
## **RoHS COMPLIANT 551-4104-801F**

Part Numbers with the "F" suffix ending are RoHS Compliant. Packaging is marked with "RoHS Compliant" label or equivalent markings. Parts can be wave soldered, dip soldered or hand soldered using typical lead-free soldering process with max 260°C temp. főr 5′sec.


GEN.TOL= ±.002 [±0.05]
Ø.040±.002 [1,02±0,05] TYP X 2
100 [2,54]
.097
RECOMMENDED HOLE PATTERN

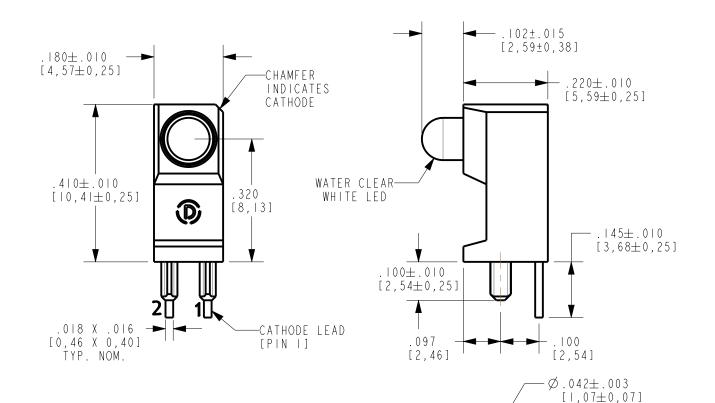

OPERATING CHARACTERISTICS AT 25°C AMBIENT						
CHARACTERISTICS	MIN	TYP	MAX	UNITS	TEST CONDITIONS	
LUMINOUS INTENSITY	1900	3000	4200	mc d	I F = 20 mA	
FORWARD VOLTAGE	2.7	3.3	3.8	V	I F = 20 mA	
REVERSE VOLTAGE		5		V		
REVERSE CURRENT			100	μА	V R = 5 V	
CHROMATICITY	Х	.029			l = 20 mA	
COORDINATES	DINATES Y .028			TF - ZO IIIA		
VIEWING ANGLE		45		Degree		

ABSOLUTE MAXIMUM RATING AT 25°C AMBIENT		UNITS
POWER CONSUMPTION	120	mW
FORWARD CURRENT	30	m A
LEAD SOLDERING TEMPERATURE, 5 SEC., 1/16" FROM BODY	260	°C
OPERATING TEMPERATURE	-40 TO +85	°C
STORAGE TEMPERATURE	-40 TO +100	°C





 $.\,\,0\,5\,4\,{}^{+}_{-}\,.\,0\,0\,3$ 

[1,37+0,07]

**Ø** 

## NOTES:

- I-LED LEAD DIMENSIONS SHOWN ARE MEASURED AT HOUSING EXIT

**REVISIONS** 


NEW RELEASE

DRN CKD APP

DATE

REV ECN NO

2-LEADS TO FIT INTO HOLES SPACED AS PER HOLE PATTERN
3.PIN NUMBERS FOR REFERENCE ONLY, DESIGNATION NON-EXISTENT ON PART.
4.DIALIGHT PART NUMBER = 551-4104-801F
5.THIS ASSEMBLY CONTAINS ELECTROSTATIC DISCHARGE SENSITIVE DEVICES (ESDS).MAINTAIN ALL PRECAUTIONARY MEASURES DURING ASSEMBLY, HANDLING, AND STORAGE IN ACCORDANCE WITH IPC-A-610.



SCALE 2.00

	THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.							
	SCALE: 4.000	DRAWING NUMBER REV						
	ALL DIM'S IN: INCHES (MM)	C-17996 A						
	TOLERANCES: UNLESS OTHERWISE SPECIFIED	C 17330						
	FRACTIONS: ±1/64 DECIMALS (.XX): ±.01	TITLE CUSTOM CBI BLOCK						
	DECIMALS (.XXX): ±.005 DECIMALS (.XXXX): ±.0005	MATERIAL						
	ANGLES: ±1°	MAIERIAL						
0	FINISH:	Dialight 1501 ROUTE 34 SOUTH						
	FSCM 83330	SHEET   OF   FAMILY TABLE:						