


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

| REVISION | | DATE | APPROVED |
|----------|--------------------------------|----------|----------|
| REV | DESCRIPTION | | |
| A | INITIAL RELEASE, RFS.26651, SV | 02/10/17 | MK |

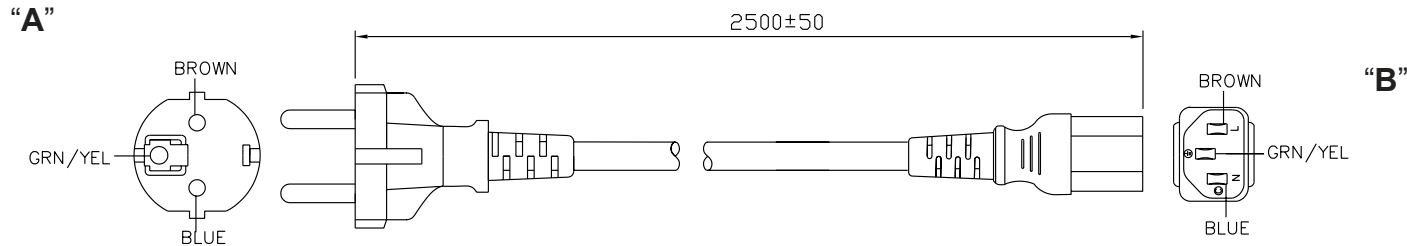

GENERAL SPECIFICATIONS:

RATING: 10A / 250V AC
 CABLE TYPE / SIZE: H05RN-F, 3 x 1.0 mm²
 TEMPERATURE RATING: 75° C
 CONDUCTOR COLORS: BROWN / BLUE/ GREEN-YELLOW
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 2500 ± 50 mm
 CABLE OUTER DIAMETER: 7.1 ± 0.2 mm
 END 'A' PLUG; CEE 7/7, BLACK
 END 'B' IEC 320 / C15, HOT CONDITION
 APPROVALS PLUG: VDE, N, S, D, FI, KEMA, CEBC, OVE,
 APPROVALS CABLE: VDE, N, S, D, FI, KEMA, CEBC, OVE
 APPROVALS CONNECTOR: VDE, N, S, D, FI, KEMA, CEBC, OVE

PACKING:

BULK PACKED, BUNDLES OF 25.
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

RELEASED
 By N.Frost at 1:59 pm, Feb 10, 2017



| DASH NO. | PART NO | REV. | DESCRIPTION | NOTES |
|-------------------------|----------------|---|-----------------------------------|---|
| TABULATION BLOCK | | | | |
| | | TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005 | | GlobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 www.globtek.com Tel. 201-784-1000 Fax 201.784.0111 |
| | | MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013 | | |
| INIT.BY: SV | DATE: 02/10/17 | DWG TITLE: EUROPEAN DETACHABLE CORDSET | | |
| DRAWN: NF | DATE: 02/10/17 | FSCN No.: G, CC | SIZE: A | REV. A |
| APRVD: DR | DATE: 02/10/17 | SCALE: NONE | PART NO: 23144132M5701H(R) | SHEET 1/1 |

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice