GlobTek, Inc.	Drawing Title: IS 1293:2005 Two Prong India BIS Plug to IEC320-C7, GT Cable #423YY: 0.75mmsq / 2 Conductors, 6.7mm OD, YY, 70 Deg.C, 500V, BLU/BRN, Approvals: , 2000mm, GlobTek Black				
www.globtek.com	Model No. Power Cord				
186 Veterans Drive,					
Northvale, NJ 07647					
Tel. (201) 784-1000	Part No./Ordering No. 208A41111M80703(R)	Rev C			
Fax (201) 784-0111					

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <u>https://www.globtek.com/iso-certificates/</u> Prop 65 Statement:https://en.globtek.com/prop-65-statement.pdf

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (<u>https://en.globtek.com/terms-and-conditions/</u>).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc. Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:	
Quote Number:	Date:	
Authorized Representative Name:	Authorized Representative Signature:	

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2019 - 2023

GlobTek, Inc.	Drawing Title: IS 1293:2005 Two Prong India BIS Plug to IEC320-C7, GT Cable #423YY: 0.75mmsq / 2 Conductors, 6.7mm OD, YY, 70 Deg.C, 500V, BLU/BRN, Approvals: , 2000mm, GlobTek Black				
www.globtek.com	Model No. Power Cord				
186 Veterans Drive,					
Northvale, NJ 07647		Rev C			
Tel. (201) 784-1000	Part No./Ordering No. 208A41111M80703(R)				
Fax (201) 784-0111					

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

REVISION HISTORY

REV	REV DESCRIPTION SI		DATE	APPROVED
С	Add India BIS (ISI) approval for the plug and cable.	bsiep	09/22/2020	QA
В	Updated wire size from 1MM/2 conductor to 0.75MM/2 conductor	svlas	05/30/2019	QA
A	Initial Release	svlas	04/22/2019	QA

Cordset Information:

CordsetColor:GlobTek Black

Cord Length (mm):2000


NOTES:

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2019 - 2023

GlobTek, Inc.	Drawing Title: IS 1293:2005 Two Prong India BIS Plug to IEC320-C7, GT Cable #423YY: 0.75mmsq / 2 Conductors, 6.7mm OD, YY, 70 Deg.C, 500V, BLU/BRN, Approvals: , 2000mm, GlobTek Black				
www.globtek.com	Model No. Power Cord				
186 Veterans Drive,					
Northvale, NJ 07647					
Tel. (201) 784-1000	Part No./Ordering No. 208A41111M80703(R)	Rev C			
Fax (201) 784-0111					

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

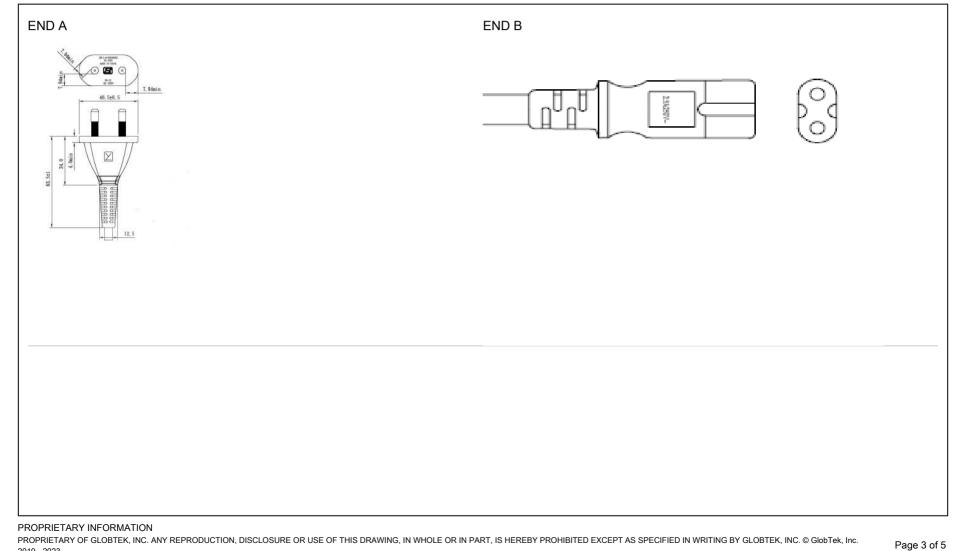

2019 - 2023

GlobTek, Inc.	Drawing Title: IS 1293:2005 Two Prong India BIS Plug to IEC320-C7, GT Cable #423YY: 0.75mmsq / 2 Conductors, 6.7mm OD, YY, 70 Deg.C, 500V, BLU/BRN, Approvals: , 2000mm, GlobTek Black						
www.globtek.com	Model No. Power Cord						
186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Part No./Ordering No. 208A41111M80703(R)						
	HS, COLORS, CABLE TYP	ES, TERMINATIONS/PLUGS/RECEP	TACLES AVAILABLE UPON REQUES	. ADDITIONAL PLUG OPTI	ONS ARE AVAILABLE AT		
			SEEN ONLINE AT https://www.globtel		CONNECTORS, OVERMOLDS,		
FERRITES MAY VARY	SLIGHTLY FROM THE PIC	CTURE BELOW DIMENSIONS ARE I	N MM UNLESS SPECIFIED OTHERWIS	SE			
End A		Cable		End B			
Code:208A		Code:423YY	Code:423YY				
	2005 Two Prong India BIS		#423YY: 0.75mmsq / 2 Conductors,	Description:IEC320-C7			
Rating (V):250			eg.C, 500V, BLU/BRN, Approvals:	Rating (V):250 Rating (A):2.5			
Rating (A):6.0 Gender:Male		Color:GlobTek Black Wire Gauge(AWG):0. [*]	75mmog				
Overmolded:Yes		Cond:2	7 Shinisq	Gender:Female Overmolded:Yes			
Overmoided. Tes		Type:YY					
		Temperature:70° C					
		Amps:10	Amps:10				
		Volts:500					
		OD:6.7					
		ConductorsColors:BL	U/BRN				
Overall cable rating:2	2.5A / 250V~						
Plug Approvals		Cable Approvals		Connector Approvals			
ß	INDIA BIS (cordsets		INDIA BIS (cordsets)	K 0 A 15W22012	ENEC-VDE and SAA		
AGENCY ONLINE D	OCUMENTS	http://en.globtek.com/cordsets/					
		https://www.globtek.com/pdf/rohs_cert/01t0c0000097C0CAAU					
		https://www.globtek.com/pdf/iso_certificates/REACH.pdf					
		ttps://www.globtek.com/pdf/conflict-minerals.pdf					
		https://en.globtek.com/prop-65-statement.pdf					
			tps://globtek.secure.force.com/spec/ec_decl_product_model_family_incl_cord?id=01t0c0000097C0C				
IPXY rating is based	on 3rd party testing and cu		test system level IPXY rating before o				
U							
				.			

PROPRIETARY INFORMATION


PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2019 - 2023

GlobTek, Inc.	Drawing Title: IS 1293:2005 Two Prong India BIS Plug to IEC320-C7, GT Cable #423YY: 0.75mmsq / 2 Conductors, 6.7mm OD, YY, 70 Deg.C, 500V, BLU/BRN, Approvals: , 2000mm, GlobTek Bla				
www.globtek.com	Model No. Power Cord				
186 Veterans Drive,					
Northvale, NJ 07647		Rev C			
Tel. (201) 784-1000	Part No./Ordering No. 208A41111M80703(R)				
Fax (201) 784-0111					

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

Hanking:200

Description:200 +/- 20mm Image:



Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2019 - 2023