View on mating side

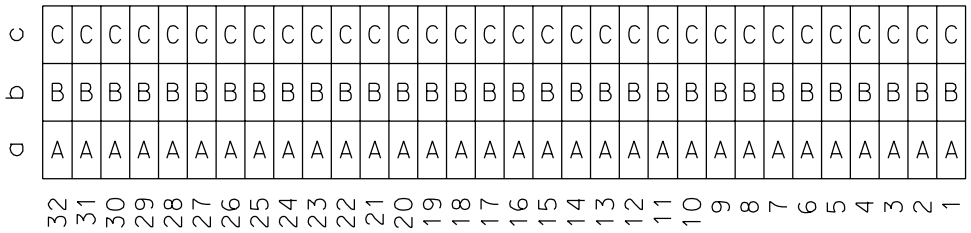

A = 32 contacts L=2.8
B = 32 contacts L=2.8
C = 32 contacts L=2.8

S = 96 total number of contacts

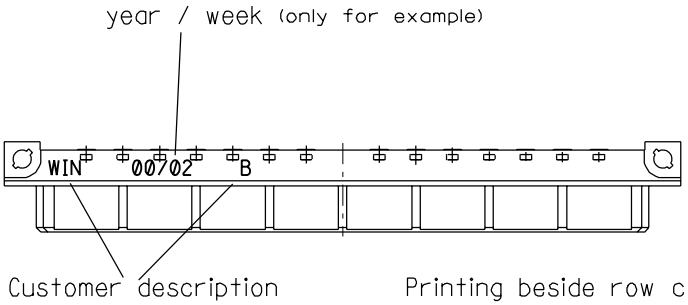

Marking	Customer special
Performance level	G2/0 = Contact area level2 / Termination tin
Flux proof	no
Fixing clip	no
Dimensions	SDA-85052-0001 sht.1
Technical Data	PS-85052-0001

C	G2/0	c1-32
B	G2/0	b1-32
A	G2/0	a1-32
Contact symbol	Perform. level	Contact position number

REVISE ONLY ON CAD SYSTEM | SH. | REV.

LTR	REVISIONS
B	printing changed ECN No. MG2001-0440 01/03/30 Ca

FOR PREVIOUS REVISIONS SEE MRI LIST

UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ±2°

	INCH	METRIC
3 PLACE	± .	±
2 PLACE	± .	±
1 PLACE	± .	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DESIGN DIMENSION ☐ MM ☐ IN.

EQUIVALENT DIMENSION ☐ MM ☐ IN.

IF TWO DIMENSIONS ARE SHOWN THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY

DRWG BY	KN	SIGN
CHK'D BY	Ca	SIGN
APP'D BY	JB	SIGN
SCALE		

CADCAM PROJECT NAME

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE

96 pos. female connector acc. DIN 41612 style R contacts arrangement

molex MOLEX EUROPE

SHEET NO.	DATE
1 OF 1	96/12/06

PART NO.	DWG NO.	SIZE
85052-0323	SDA-85052-0323	A