


DIMENSIONS FOR 15 - 62 POSITION (3 ROW)(SHOWN WITH FIXED FEMALE SCREWLOCKS) DIMENSIONS FOR THE 78 POSITION (4 ROW)

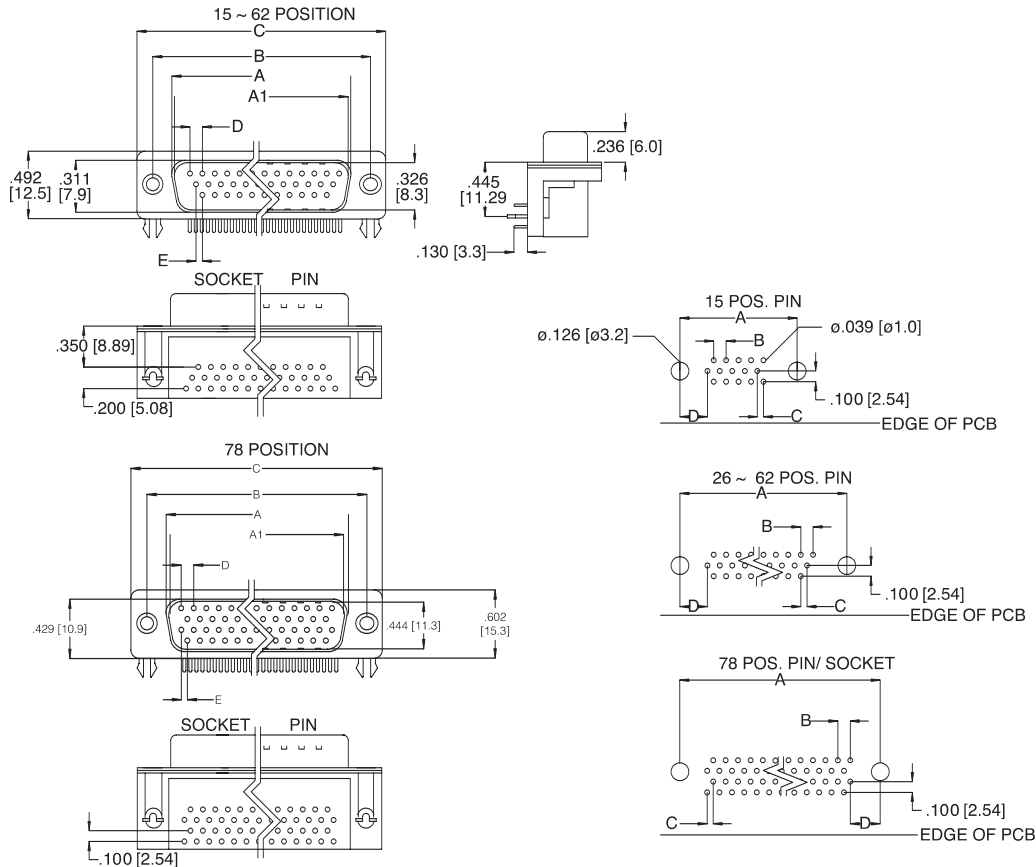

CONTACTS	A SOCKET	A1 PIN	B	C	D	E
15	.642 [16.30]	.666 [16.92]	.984 [25.0]	1.213 [30.8]	.090 [2.29]	.045 [1.145]
26	.969 [24.6]	.994 [25.25]	1.311 [33.3]	1.543 [39.2]	.090 [2.29]	.045 [1.145]
44	1.508 [38.3]	1.534 [38.96]	1.854 [47.1]	2.091 [53.1]	.090 [2.29]	.045 [1.145]
62	2.157 [54.8]	2.182 [55.42]	2.50 [63.5]	2.732 [69.4]	.095 [2.41]	.047 [1.205]
78	2.05 [52.20]	2.079 [52.81]	2.40 [61.0]	2.638 [67.0]	.095 [2.41]	.047 [1.205]

CONTACTS	A	B	C	D
15	.984 [25.0]	.090 [2.29]	.045 [1.145]	.277 [7.04]
26	1.311 [33.3]	.090 [2.29]	.045 [1.145]	.271 [6.88]
44	1.854 [47.1]	.090 [2.29]	.045 [1.145]	.271 [6.88]
62	2.50 [63.5]	.095 [2.41]	.047 [1.205]	.275 [7.00]
78	2.402 [61.0]	.095 [2.41]	.047 [1.205]	.300 [7.63]

### ORDERING INFORMATION

## 17BH Series High Density D-Sub

Front Metal Shell, Right-Angle PC Mount

### 17BH - 0XX - X - XX - X - XX

**Series** \_\_\_\_\_

**Number Of Positions** \_\_\_\_\_  
15, 26, 44, 62, 78

**Type** \_\_\_\_\_  
**P** Pin (male)  
**S** Socket (female)

**PCB Mount Options**  
**00** Clear hole  
**10** Arrowhead Board

**Panel Mounting Options**  
**0** .120 (3.05) Clear Hole  
**1** #4-40 Threaded Hole  
**2** #4-40 Fixed Female Screw

**Plating Code**  
**AA** Gold Flash over Nickel  
**AM** 30µ\* (.76µm) Gold over Nickel