




reddot award 2014 winner

Statement by Red Dot jury: Ergo-tek has excellent tactile qualities as a result of its high ergonomics and carefully thought-out material textures.

Following the User-Centered Design approach of one of the world's most respected research universities (University of Milan), over a two year period, Ideal-tek gained a full understanding of the needs, wants and frustrations of end users.

Subsequent painstaking attention to detail at every stage of the design process resulted in the creation of the ideal handles. Precision Swiss manufacture provides quality, accuracy and longevity. The addition of Italian design brings beauty and elegance.

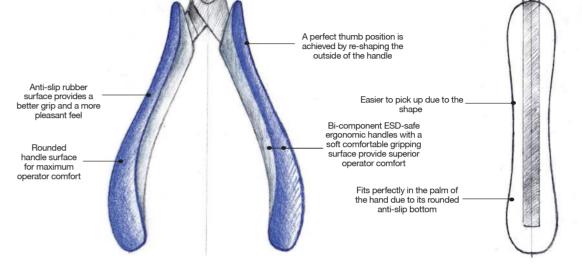



The new lighter weight **ERGO-TEK SLIM** range is designed especially for smaller hands while providing the same ergonomic, ESD safety standards, and technical advantages you expect from Ideal-tek.

Upgraded features:

- Revised ergonomic handle to provide enhanced operator comfort and reduce repetitive motion injuries
- Lighter weight
- · Better accessibility and visibility in confined areas

With **Ergo-tek** AND **Ergo-tek slim**, users are now able to custom fit high precision tools to their personal preference and application. No more, one line fits all!



Engineered for hard wires

Tungsten carbide blades

81 HRC hardness


Perfect symmetry

Dual leaf springs made of stainless steel

Lap joint with screw to achieve a high level of strength and precision

Nuts made of hardened alloy steel to resist high cutting load

Fine-pitched screw for perfect joint adjustment

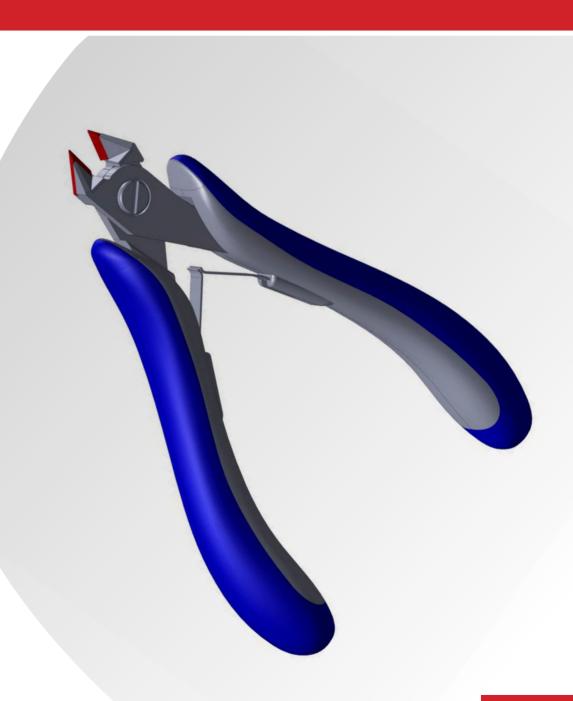

2-Component ESD-safe Ergonomic handles with a soft comfortable gripping surface.

2 sizes: Ergo-tek (E) and Ergo-tek slim (ES)

For every handles production lot Ideal-tek performs the following tests:

- point to point resistance
- surface resistance
- decay time analysis





IDEAL-TEK | APPLICATION


Application of Ideal-tek cutters line:


- Stents
- Braided mesh
- Catheters
- Single/Multiple fliers
- Guide wires
- Lateral/Internal cuts












Tungsten Carbide Sharp Tip - Oval & Relieved Diagonal

Tapered & Angled head 50°




Tungsten Carbide Sharp Tip - Tapered Angled Cutters


E = ERGO-TEK HANDLE ES = ERGO-TEK SLIM HANDLE


| Art. No. | Туре | Head Shape | A[mm] | B[mm] | C[mm] | D[mm] | E[mm] | F[mm] | G[mm] | Cutting Edges | Copper* | Kovar* | Nickel* | Stainless* | Platinum* | Tungsten* | Piano Wire* | NiTinol* |
|-----------------------|-------|------------|------------|-------|-------|-------|-------|-------|-------|---------------|---------|--------|---------|------------|-----------|-----------|-------------|----------|
| E141TX ES141TX | Small | Oval | 125 120 | 10 | 10 | 6.4 | - | - | - | Flush | • | ٠ | • | • | ٠ | • | ٠ | • |
| ES152GTX | Large | Oval | 120 | 11 | 12.5 | 6.4 | - | - | - | Full-Flush | ٠ | ٠ | • | ٠ | ٠ | ٠ | ٠ | • |
| ES340TX | Small | Tapered | 118 | 7 | 10 | 6.4 | 1.2 | - | - | Semi-Flush | ٠ | ٠ | • | ٠ | ٠ | ٠ | ٠ | • |
| ES341PTTX | Small | Tapered | 118 | 7 | 10 | 6.4 | 1.2 | - | - | Flush | ٠ | ٠ | • | • | ٠ | • | ٠ | • |
| E351PTTX ES351PTTX | Large | Tapered | 123 118 | 6.5 | 12.5 | 6.4 | 4.3 | - | - | Flush | • | • | • | • | ٠ | • | ٠ | • |
| E351TX ES351TX | Large | Tapered | 123 118 | 7.5 | 12.5 | 6.4 | 0.7 | 0.4 | - | Flush | • | ٠ | • | • | ٠ | • | ٠ | • |
| ES352GTX | Large | Tapered | 120 | 11 | 12.5 | 6.4 | 1.5 | - | - | Full-Flush | ٠ | ٠ | • | • | ٠ | • | ٠ | • |


* Depending on the wire diameter












Tungsten Carbide Sharp Tip - Oval & Relieved Diagonal Cutters Tapered & Angled head 50°



Tungsten Carbide Sharp Tip - Tapered Angled Cutters

E = ERGO-TEK HANDLE ES = ERGO-TEK SLIM HANDLE

| Art. No. | Туре | Head Shape | A[mm] | B[mm] | C[mm] | D[mm] | E[mm] | F[mm] | G[mm] | Cutting Edges | Copper* | Kovar* | Nickel* | Stainless* | Platinum* | Tungsten* | Piano Wire* | NiTinol* |
|-------------------|-------|---------------------------------|------------|-------|-------|-------|-------|-------|-------|---------------|---------|--------|---------|------------|-----------|-----------|-------------|----------|
| ES541GTX | Small | Tapered & Relieved | 120 | 10 | 10 | 6.4 | - | - | - | Flush | • | ٠ | • | • | • | • | ٠ | • |
| E542TX ES542TX | Small | Tapered & Relieved | 125 120 | 8.5 | 10 | 6.4 | 0.7 | 0.3 | - | Full-Flush | ٠ | ۲ | • | • | ٠ | ٠ | ٠ | • |
| ES552GTX | Large | Tapered & Relieved | 120 | 10 | 10 | 6.4 | - | - | - | Full-Flush | ٠ | ۲ | • | • | ٠ | ٠ | ٠ | • |
| ES441GTX | Small | Oval & Relieved | 120 | 10 | 10 | 6.4 | - | - | - | Flush | ٠ | ۲ | • | • | ٠ | ٠ | ٠ | • |
| ES248ATX | Small | Tapered & Angled head 50° | 123 | 13 | 10 | 6.4 | 0.5 | - | 8.30 | Full-Flush | ٠ | ٠ | ٠ | ٠ | ۲ | ۰ | ٠ | ٠ |
| ES248TX | Small | Tapered & Angled head 50° | 123 | 13 | 10 | 6.4 | 0.15 | - | 8.30 | Full-Flush | ٠ | ۲ | ٠ | ٠ | ٠ | ٠ | ٠ | ٠ |

* Depending on the wire diameter

swiss made



Mail address Ideal-Tek SA · p.o. box 17 6830 Chiasso · Switzerland

Shipping address Ideal-Tek SA · via Motta 4 6828 Balerna · Switzerland

 Phone
 +41 91 683 32 29

 Fax
 +41 91 683 03 71

 E-mail
 info@ideal-tek.com

 Web
 www.ideal-tek.com



SWISS TECHNOLOGY AT YOUR FINGERTIPS