

500mW, 2.4V - 75V Surface Mount Zener Diode

FEATURES

- Wide Zener voltage range selection: 2.4V to 75V
- V_Z Tolerance Selection of $\pm 2\%$
- Hermetically sealed glass
- RoHS Compliant


APPLICATIONS

- Low voltage stabilizers or voltage references
- Adapters
- Lighting application
- On-board DC/DC converter

MECHANICAL DATA

- Case: QMMELF
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Polarity: Indicated by cathode band
- Weight: 30.80mg (approximately)

| KEY PARAMETERS | | |
|------------------------------|------------|--------------------|
| PARAMETER | VALUE | UNIT |
| V_Z | 2.4 - 75 | V |
| Test current I_{ZT} | 2.5 - 5.0 | mA |
| P_D | 500 | mW |
| V_F at $I_F = 10\text{mA}$ | 1 | V |
| $T_{J \text{ Max}}$ | 175 | $^{\circ}\text{C}$ |
| Package | QMMELF | |
| Configuration | Single die | |



QMMELF



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^{\circ}\text{C}$ unless otherwise noted)

| PARAMETER | SYMBOL | VALUE | UNIT |
|---------------------------------------|-----------|-------------|--------------------|
| Power dissipation | P_D | 500 | mW |
| Forward voltage @ $I_F = 10\text{mA}$ | V_F | 1 | V |
| Junction temperature range | T_J | -65 to +175 | $^{\circ}\text{C}$ |
| Storage temperature range | T_{STG} | -65 to +175 | $^{\circ}\text{C}$ |

THERMAL PERFORMANCE

| PARAMETER | SYMBOL | LIMIT | UNIT |
|--|-----------------|-------|-----------------------------|
| Junction-to-ambient thermal resistance | $R_{\theta JA}$ | 500 | $^{\circ}\text{C}/\text{W}$ |

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

| PART NUMBER | ZENER VOLTAGE | | | TEST CURRENT | REGULAR IMPEDANCE | | TEST CURRENT | LEAKAGE CURRENT | |
|-------------|----------------------|------|-------|--------------|-------------------|-------------------|--------------|-----------------|-----|
| | $V_Z @ I_{ZT}^{(1)}$ | | | I_{ZT} | $Z_{ZT} @ I_{ZT}$ | $Z_{ZK} @ I_{ZK}$ | I_{ZK} | $I_R @ V_R$ | |
| | V | | | mA | Ω | Ω | mA | μA | V |
| | Min | Nom | Max | | Max | Max | | Max | |
| BZT55B2V4 | 2.35 | 2.4 | 2.45 | 5 | 85 | 600 | 1.0 | 50 | 1 |
| BZT55B2V7 | 2.65 | 2.7 | 2.75 | 5 | 85 | 600 | 1.0 | 10 | 1 |
| BZT55B3V0 | 2.94 | 3.0 | 3.06 | 5 | 85 | 600 | 1.0 | 4 | 1 |
| BZT55B3V3 | 3.23 | 3.3 | 3.37 | 5 | 85 | 600 | 1.0 | 2 | 1 |
| BZT55B3V6 | 3.53 | 3.6 | 3.67 | 5 | 85 | 600 | 1.0 | 2 | 1 |
| BZT55B3V9 | 3.82 | 3.9 | 3.98 | 5 | 85 | 600 | 1.0 | 2 | 1 |
| BZT55B4V3 | 4.21 | 4.3 | 4.39 | 5 | 75 | 600 | 1.0 | 1 | 1 |
| BZT55B4V7 | 4.61 | 4.7 | 4.79 | 5 | 60 | 600 | 1.0 | 0.5 | 1 |
| BZT55B5V1 | 5.00 | 5.1 | 5.20 | 5 | 35 | 550 | 1.0 | 0.1 | 1 |
| BZT55B5V6 | 5.49 | 5.6 | 5.71 | 5 | 25 | 450 | 1.0 | 0.1 | 1 |
| BZT55B6V2 | 6.08 | 6.2 | 6.32 | 5 | 10 | 200 | 1.0 | 0.1 | 2 |
| BZT55B6V8 | 6.66 | 6.8 | 6.94 | 5 | 8 | 150 | 1.0 | 0.1 | 3 |
| BZT55B7V5 | 7.35 | 7.5 | 7.65 | 5 | 7 | 50 | 1.0 | 0.1 | 5 |
| BZT55B8V2 | 8.04 | 8.2 | 8.36 | 5 | 7 | 50 | 1.0 | 0.1 | 6.2 |
| BZT55B9V1 | 8.92 | 9.1 | 9.28 | 5 | 10 | 50 | 1.0 | 0.1 | 6.8 |
| BZT55B10 | 9.80 | 10.0 | 10.20 | 5 | 15 | 70 | 1.0 | 0.1 | 7.5 |
| BZT55B11 | 10.78 | 11.0 | 11.22 | 5 | 20 | 70 | 1.0 | 0.1 | 8.2 |
| BZT55B12 | 11.76 | 12.0 | 12.24 | 5 | 20 | 90 | 1.0 | 0.1 | 9.1 |
| BZT55B13 | 12.74 | 13.0 | 13.26 | 5 | 26 | 110 | 1.0 | 0.1 | 10 |
| BZT55B15 | 14.70 | 15.0 | 15.30 | 5 | 30 | 110 | 1.0 | 0.1 | 11 |
| BZT55B16 | 15.68 | 16.0 | 16.32 | 5 | 40 | 170 | 1.0 | 0.1 | 12 |
| BZT55B18 | 17.64 | 18.0 | 18.36 | 5 | 50 | 170 | 1.0 | 0.1 | 13 |
| BZT55B20 | 19.60 | 20.0 | 20.40 | 5 | 55 | 220 | 1.0 | 0.1 | 15 |
| BZT55B22 | 21.56 | 22.0 | 22.44 | 5 | 55 | 220 | 1.0 | 0.1 | 16 |
| BZT55B24 | 23.52 | 24.0 | 24.48 | 5 | 80 | 220 | 1.0 | 0.1 | 18 |
| BZT55B27 | 26.46 | 27.0 | 27.54 | 5 | 80 | 220 | 1.0 | 0.1 | 20 |
| BZT55B30 | 29.40 | 30.0 | 30.60 | 5 | 80 | 220 | 1.0 | 0.1 | 22 |
| BZT55B33 | 32.34 | 33.0 | 33.66 | 5 | 80 | 220 | 1.0 | 0.1 | 24 |
| BZT55B36 | 35.28 | 36.0 | 36.72 | 5 | 80 | 220 | 1.0 | 0.1 | 27 |
| BZT55B39 | 38.22 | 39.0 | 39.78 | 2.5 | 90 | 500 | 0.5 | 0.1 | 28 |
| BZT55B43 | 42.14 | 43.0 | 43.86 | 2.5 | 90 | 600 | 0.5 | 0.1 | 32 |
| BZT55B47 | 46.06 | 47.0 | 47.94 | 2.5 | 110 | 700 | 0.5 | 0.1 | 35 |
| BZT55B51 | 49.98 | 51.0 | 52.02 | 2.5 | 125 | 700 | 0.5 | 0.1 | 38 |
| BZT55B56 | 54.88 | 56.0 | 57.12 | 2.5 | 135 | 1000 | 0.5 | 0.1 | 42 |
| BZT55B62 | 60.76 | 62.0 | 63.24 | 2.5 | 150 | 1000 | 0.5 | 0.1 | 47 |
| BZT55B68 | 66.64 | 68.0 | 69.36 | 2.5 | 160 | 1000 | 0.5 | 0.1 | 51 |
| BZT55B75 | 73.50 | 75.0 | 76.50 | 2.5 | 170 | 1000 | 0.5 | 0.1 | 56 |

Notes:

1. The Zener Voltage (V_Z) is tested under pulse condition of 30ms
2. The device numbers listed have a standard tolerance on the nominal Zener voltage of $\pm 2\%$
3. For detailed information on price, availability and delivery of nominal Zener voltages between the voltages shown and tighter voltage tolerances, contact your nearest Taiwan Semiconductor representative
4. The Zener impedance is derived from the 60-cycle AC voltage, which results when an AC current having an R_{MS} value equal to 10% of the dc Zener current (I_{ZT} or I_{ZK}) is superimposed to I_{ZT} or I_{ZK}

| ORDERING INFORMATION | | |
|---------------------------------------|----------------|--------------------------|
| ORDERING CODE⁽¹⁾⁽²⁾ | PACKAGE | PACKING |
| BZT55Bx L0 | QMMELF | 10,000 / 13" Tape & Reel |
| BZT55Bx L0G | QMMELF | 10,000 / 13" Tape & Reel |

Notes:

1. "x" defines voltage from 2.4V (BZT55B2V4) to 75V (BZT55B75)
2. Above ordering codes L0/L0G refer to physically identical parts without any differences

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Typical Forward Characteristics

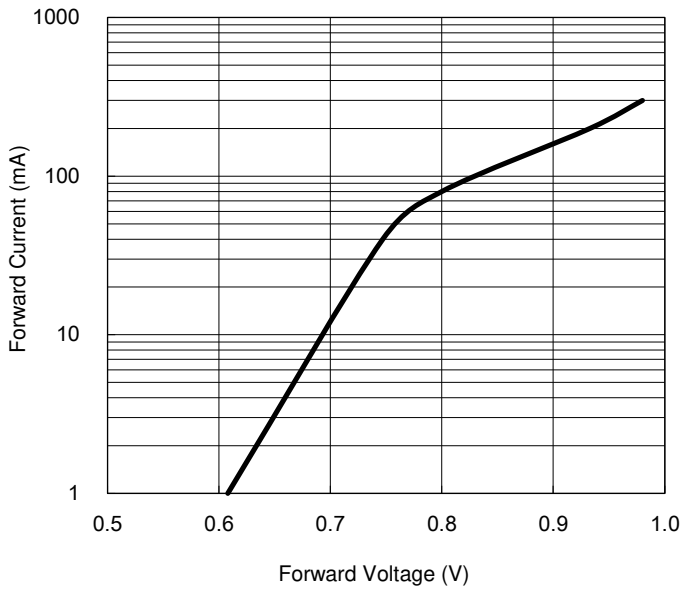


Fig.2 Zener Breakdown Characteristics

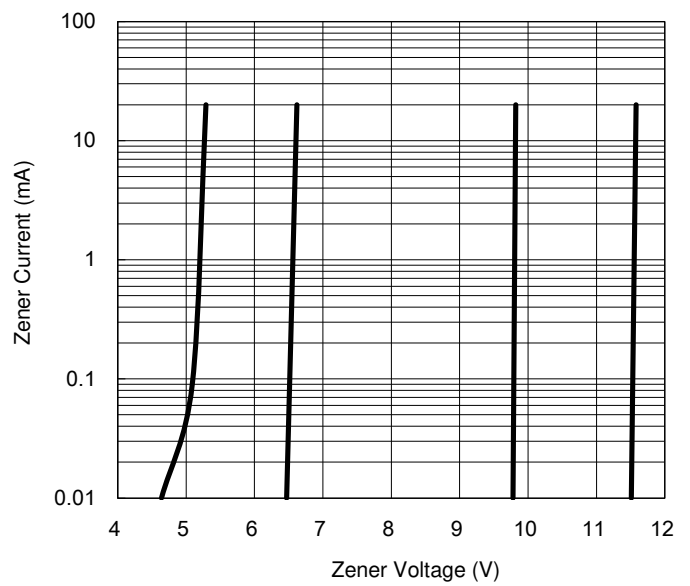


Fig.3 Zener Breakdown Characteristics


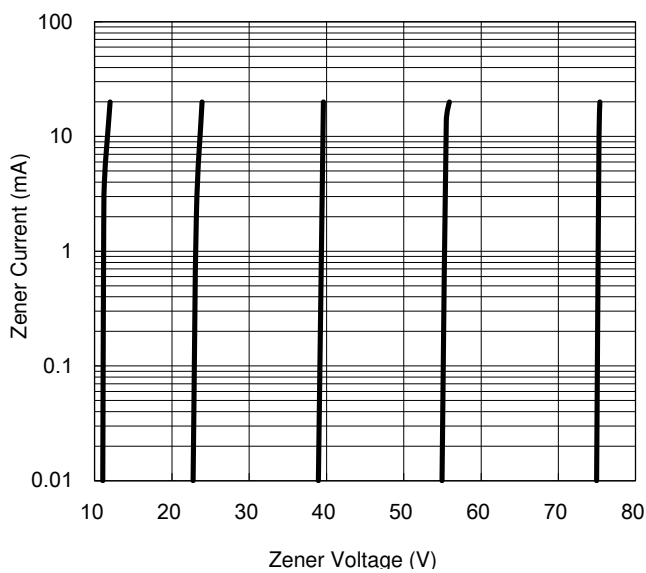


Fig.4 Admissible Power Dissipation Curve

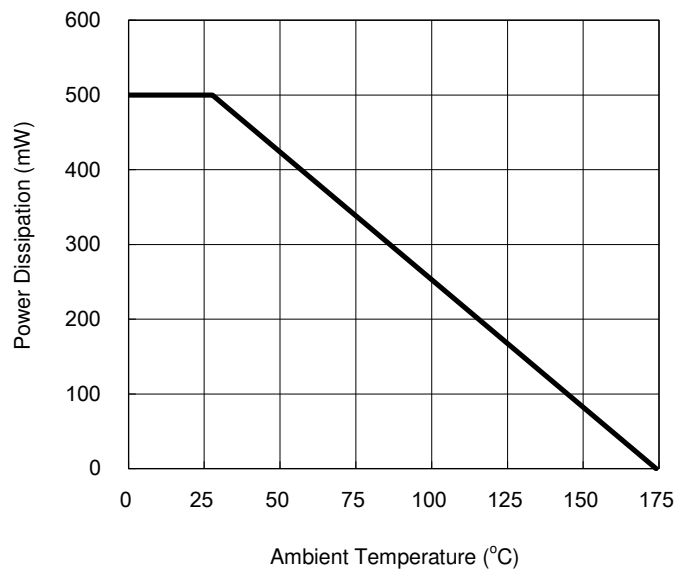

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.5 Typical Capacitance



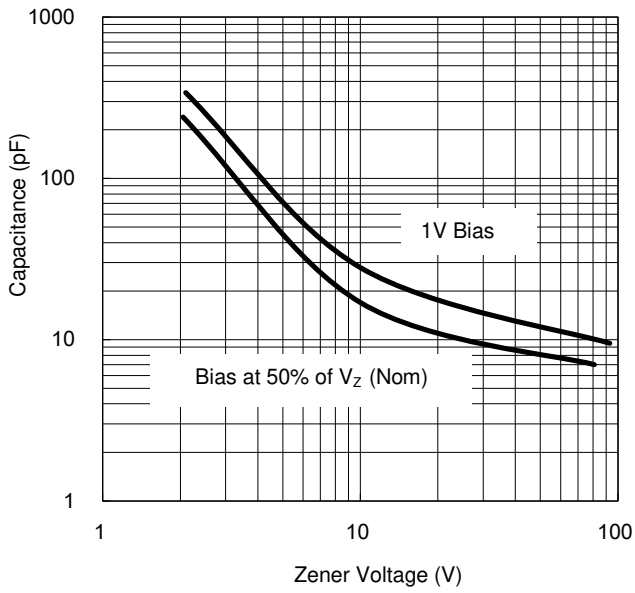


Fig.6 Effect of Zener Voltage on Impedance

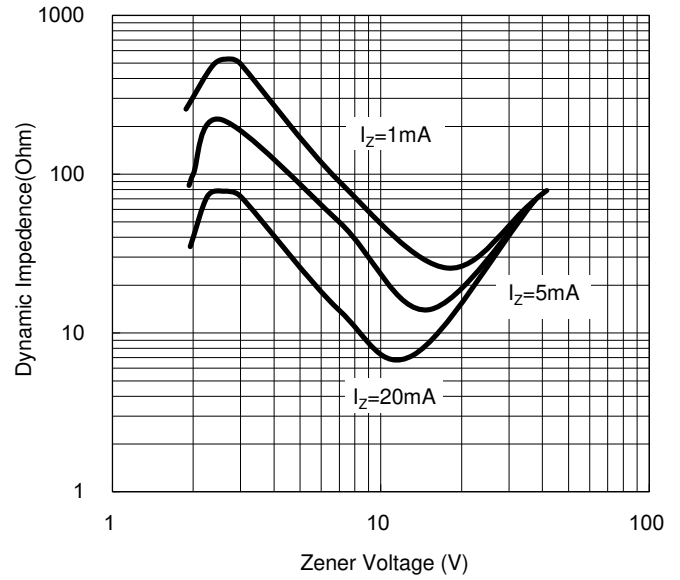


PACKAGE OUTLINE DIMENSIONS

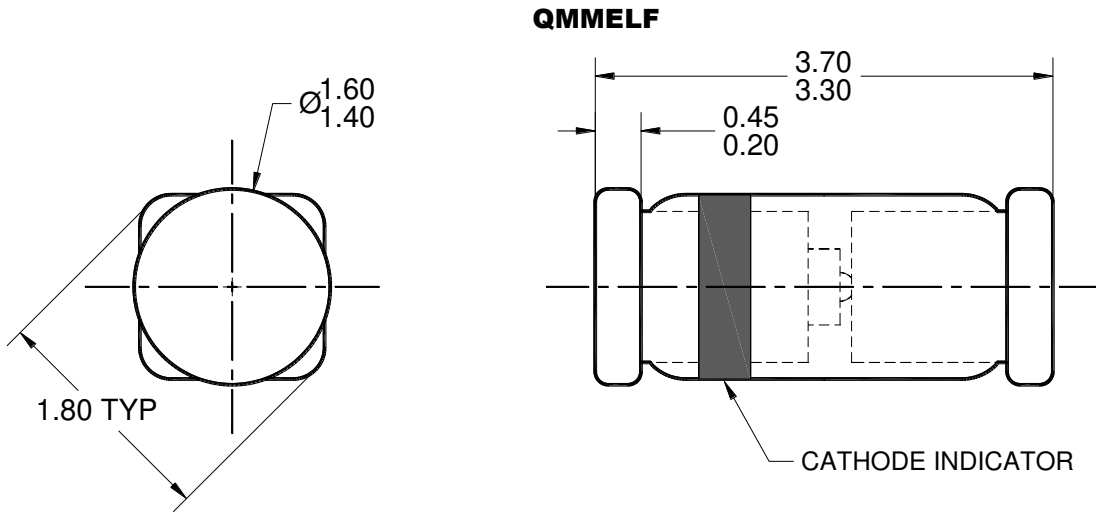

QMMELF

CATHODE INDICATOR

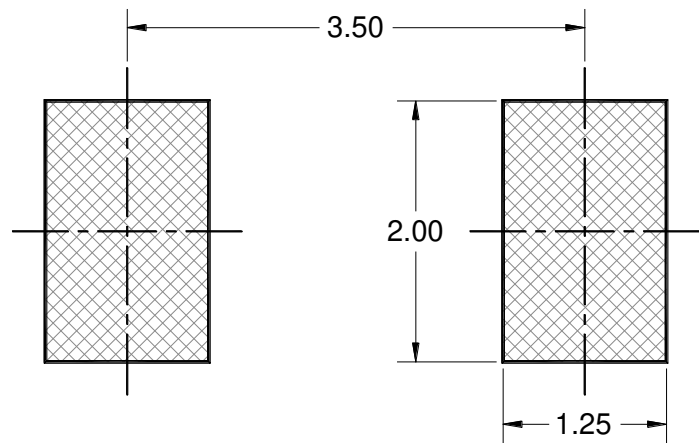

SUGGESTED PAD LAYOUT

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
3. PACKAGE OUTLINE REFERENCE: JEDEC DO-213, VARIATION AA, ISSUE D.
4. DWG NO. REF: HQ2SD07-QMMELF-061 REV A.

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.