




F

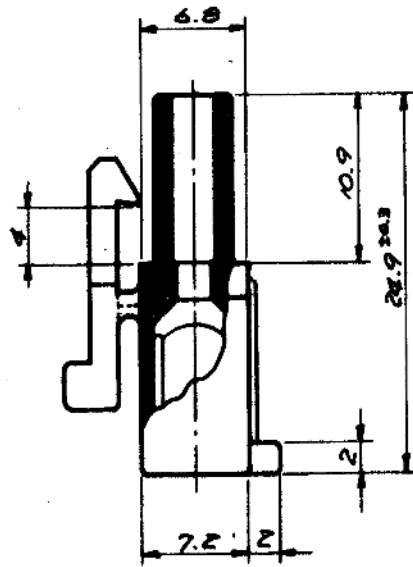


E

D

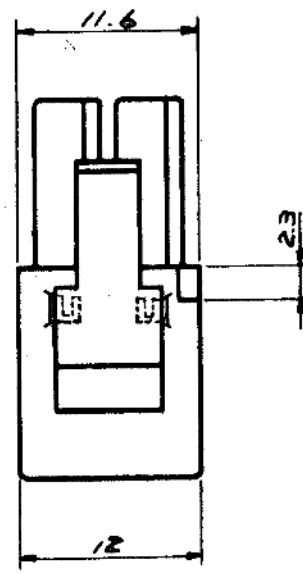

C

B




GENERAL TOLERANCES	
10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGLE	±5°

A



				公差 (Tolerances) .000 → ±0.005 .00 → ±0.05 .0 → ±0.1 . → ±0.3	所要数 (Req) DRWG. <i>Y. Amano '97</i> DSN'D <i>M. Yamamoto '96/77</i> CHK'D <i>W. Shio</i> APP'D
				材料 (MAT'L) NYLON66, 94V-2	
				熱処理 (H.T.) HRc —	MOLEX-JAPAN CO., LTD. 日本モレックス株式会社 No. SD 5025-02R1
				仕上げ (Finish) —	
D	D.Y.F. 217 TRAIL ECN NO. 1486	11/6/77	K.H.		Scale 2/1 名称 (Name) MINI. FIT CONN. 2POS. RECEPTACLE HSG.
C	REMOVED X ECN NO. 748	7/2/77	ER		
B ₁	ロッキン YV7	3/13/77	AD		
B	リブ, ナーキット NO.	12/6/77	AD		
A	REVISED	11/15/77	AD		
0	PROPOSED	10/9/77	AD		
記号 LTR	変更内容 (Rev.)	Date	Name		REV. D

F




E

D

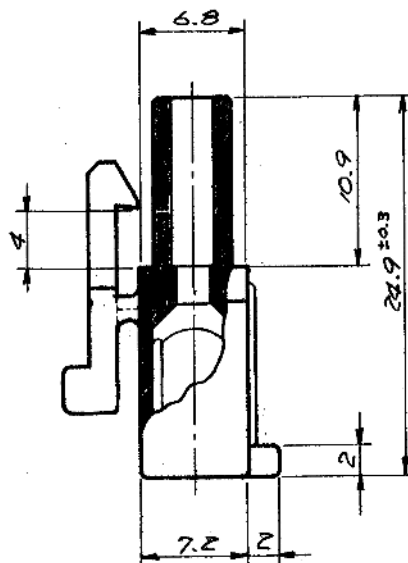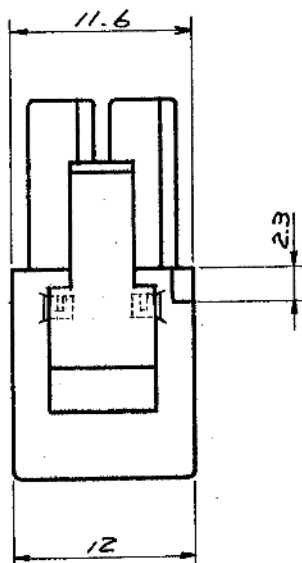

C

B



一般公差	
10未満	±0.2
10以上30未満	±0.25
30以上	±0.3
角度	±3°

A

				公差 (Tolerances) .000 → ±0.005 .00 → ±0.05 .0 → ±0.1 . → ±0.3		所要数 (Req)		DRWG. <i>Y. Amano</i> 12/9/77 DSN'D <i>M. SUMOTO</i> 12/15/77 CHK'D <i>K. S. Ito</i> APP'D <i>V. M.</i>	
				材料 (MAT'L) NYLON 66, 94V-Z		molex MOLEX-JAPAN CO., LTD. 日本モレックス株式会社			
				熱処理 (H.T.) HRc — # —					
D	ロッキング支柱 ECN.NO.1486	1/21/79	K.H.	仕上げ (Finish)		No.		REV.	
C	REMOVED "X" ECN NO. 748	3/12/78	VS	— # —		SD-5025-02R1		D	
B ₁	ロッキングV7	3/13/78	VS	名称 (Name)		MINI. FIT. CONN.			
B	リブ, サキットNO.	12/6/77	VS	Scale		2/1			
A	REVISED	11/5/77	VS	2POS. RECEPTACLE HSG.					
0	PROPOSED	10/9/77	VS						
記号 (LTR)	変更内容 (Rev.)	Date	Name						