

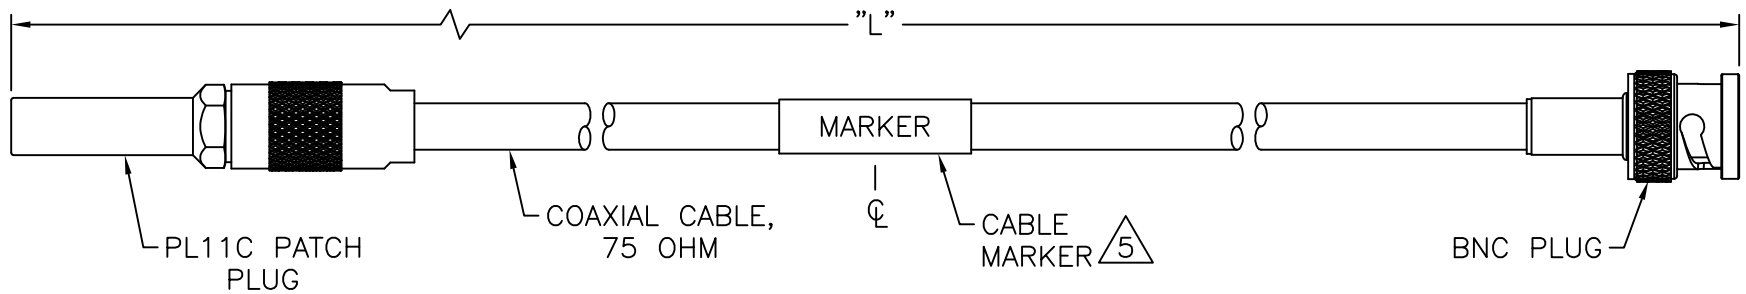



TABLE 1

MODEL NUMBER	"L"	MARKER 
UPCMWX-12-75	12	UPCMWX-12-75 14949 #####
UPCMWX-18-75	18	UPCMWX-18-75 14949 #####
UPCMWX-24-75	24	UPCMWX-24-75 14949 #####
UPCMWX-36-75	36	UPCMWX-36-75 14949 #####
UPCMWX-48-75	48	UPCMWX-48-75 14949 #####




NOTES: UNLESS OTHERWISE SPECIFIED.




1. WORKMANSHIP PER IPC/WHMA-A-620, CLASS 3 SECTION 13.

 2. TOLERANCE PER IPC-WMHA-620, SECTION 11.1.

3. TESTING:  
3.1 CONTINUITY  
3.2 DWV: 1500 VRMS

4. BEND RADIUS (MIN): 1.0

 5. MARKER:  
5.1 MARKED PER TABLE 1  
5.2 ##### = LOT CODE

 <small>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is no traced or copied without permission and is returnable upon demand.</small> <small>INTERPRET DRAWING ACCORDANCE WITH ASME Y14.5-2009.</small>	<small>3RD ANGLE PROJECTION</small> 	<h2>TROMPETER</h2>	
	<small>RoHS2</small> <small>2011/65/EU</small>	<small>Title:</small> CABLE ASSEMBLY, TCC-75-2 PATCH PLUG TO BNC PLUG	
<small>UNLESS OTHERWISE SPECIFIED</small> <small>UNITS: INCH</small>		<small>Model No.</small> UPCMWX-XX-75	
		<small>SIZE</small> A	<small>DO NOT SCALE DRAWING</small>
		<small>Workmanship Std:</small> SEE NOTES	<small>SHEET</small> 1 OF 1