






FRONT VIEW



HEAT-STAKE PEG VERSION




ASSEMBLY AFTER HOT RIVETING

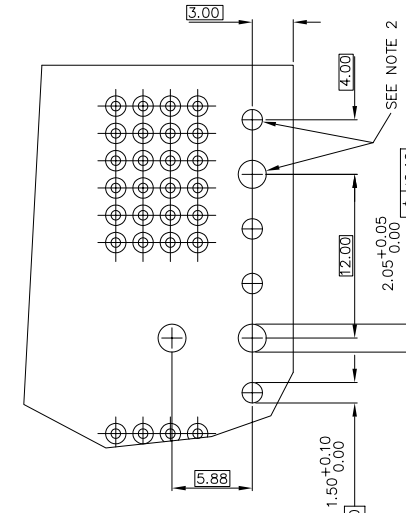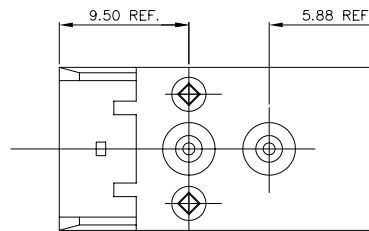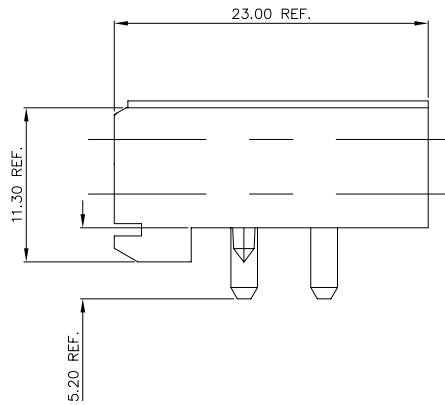

REQUIRED PC BOARD LAYOUT COMPONENT SIDE

NOTE:

- ① HOUSING MATERIAL: LCP, 30% GLASS FILLED  
FLAME RETARDANT PER UL 94V-0  
COLOR: NATURAL
- ② INDICATED HOLES ARE UNPLATED
- 3. SHADED AREA DENOTES PLUGGED (CLOSE) POSITION.  
SEE SHEET #4 FOR PLUG COMBINATIONS AND PRODUCT NUMBERS.  
PLUG COMBINATION SHOWN ABOVE IS FOR REFERENCE ONLY.  
(PLUG COMBINATION #13)
- ④ ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- 5. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER  
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- 6. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK  
TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION  
WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20  
SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW  
OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.


mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection MM		product family METRAL ACC	
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title		 RECEPTACLE KEYING MODULE sheet 1 of 6 size A3 type Product Customer Drawing
J	V10105	JRW		1/04/01	angles	.0±.3	MM		
K	V12705	CGD		11/14/01	linear	.00±.13	scale 1:1		
L	V04-0174	HTB		2/18/04	0'±2'	.000±.051			
M	M05-0264	MHT		12/28/05	dr	S.STONER	4/16/93		
N	M06-0077	MHT		2/17/06	enrg	R.DOETRICH	4/16/93		
P	M06-0147	MHT		4/07/06	chr	S.STONER	4/16/93		
R	M06-0159	MHT		5/08/06	appd	S.STONER	4/16/93		
sheet index	revision	R	R	R	R	R	R	R	
	sheet	1	2	3	4	5	6		






FCJconnect.com

Copyright FCJ


FRONT VIEW



PRESS PEG VERSION

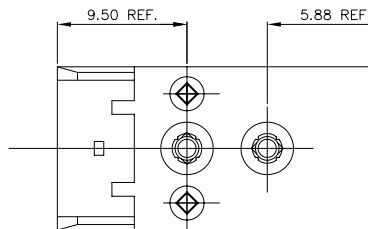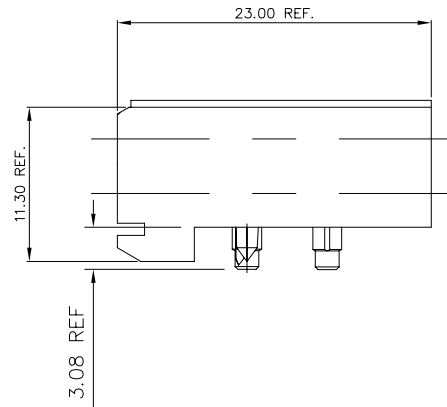

ASSEMBLY ON P.C.B.

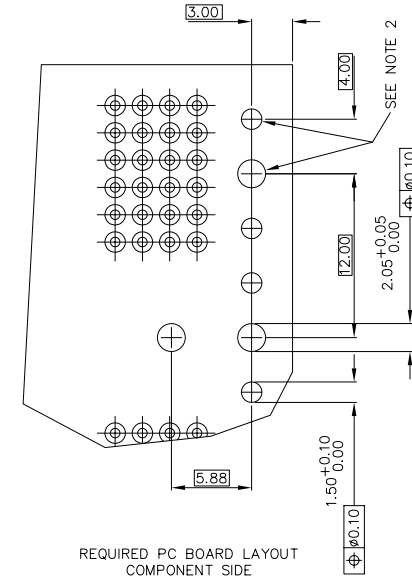

REQUIRED PC BOARD LAYOUT COMPONENT SIDE

NOTE:

- ① HOUSING MATERIAL: LCP, 30% GLASS FILLED  
FLAME RETARDANT ACC. UL 94V-0  
COLOR: NATURAL
- ② INDICATED HOLES ARE UNPLATED
- ③ SHADED AREA DENOTES PLUGGED (CLOSE) POSITION.  
SEE SHEET #4 FOR PLUG COMBINATIONS AND PRODUCT NUMBERS.  
PLUG COMBINATION SHOWN ABOVE IS FOR REFERENCE ONLY.  
(PLUG COMBINATION #13)


④ ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.

5. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.





6. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

mat'l. code		surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family METRAL ACC
ltr	ecn no	dr	date	tolerances unless otherwise specified	title RECEPTACLE KEYING MODULE
R				angles linear 0°±2'	MM scale 1:1
				dr S.STONER 4/16/93	FCI
				enr R.DOUTRICH 4/16/93	dwg no 88916 sheet 2 of 6 size A3
				chr S.STONER 4/16/93	type Product Customer Drawing
				appd S.STONER 4/16/93	
sheet index	revision sheet				

FRONT VIEW



SCREW DOWN VERSION

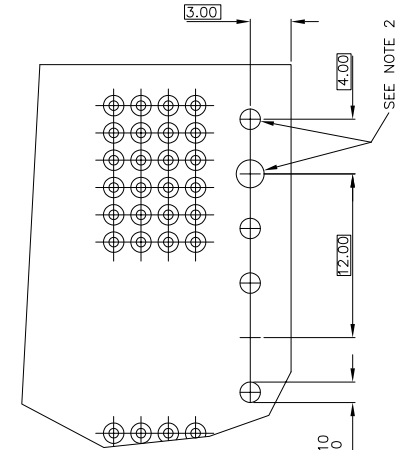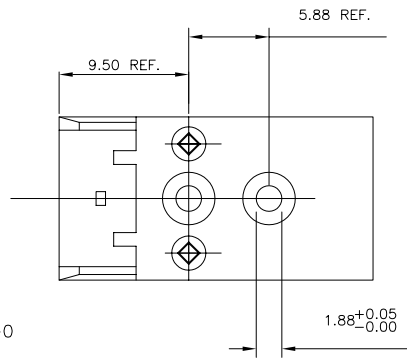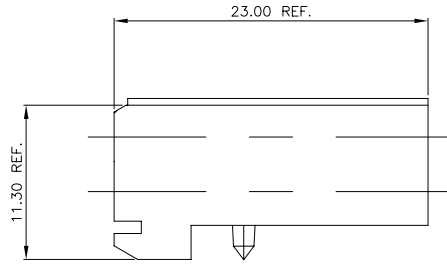

REQUIRED PC BOARD LAYOUT COMPONENT SIDE

NOTE:


- ① HOUSING MATERIAL: LCP, 30% GLASS FILLED  
FLAME RETARDANT PER UL 94V-0  
COLOR: NATURAL
- ② INDICATED HOLES ARE UNPLATED
3. TWO MOUNTING SCREW, P/N 63787-001, FOR MAX PCB THICKNESS 2.4MM[0.094"] OR P/N 63787-002 FOR MAX. PCB THICKNESS 3.2MM[0.126"] MUST BE ORDERED SEPARATLY.
4. SHADED AREA DENOTES PLUGGED (CLOSE) POSITION. SEE SHEET #6 FOR PLUG COMBINATIONS AND PRODUCT NUMBERS. PLUG COMBINATION SHOWN ABOVE IS FOR REFERENCE ONLY. (PLUG COMBINATION #04)
- ⑤ ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
6. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
7. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection MM		product family METRAL ACC	
ltr		ecn no dr		date		tolerances unless otherwise specified		title	
R						.0±.3 .00±.13 .000±.051		RECEPTACLE KEYING MODULE	
				0'±2'		scale 1:1		dwg no sheet 3 of 6 size	
				dr S.STONER 4/16/93		FCJ		88916 A3	
				enr R.DOUTRICH 4/16/93				type Product Customer Drawing	
				chr S.STONER 4/16/93					
				appd S.STONER 4/16/93					
sheet index		revision sheet							

PRODUCT NUMBER 88916-XYZ

PLUG COMBINATIONS - (FRONT VIEW)

PLUGGED POSITION  
SEE NOTE 1

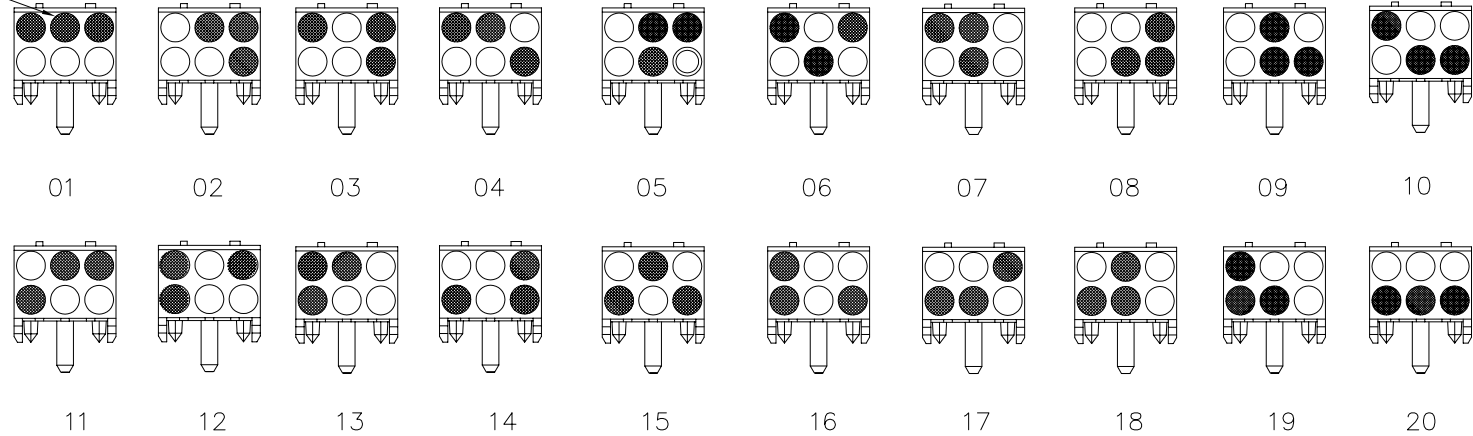

PRODUCT NUMBER HEAT-STAKE VERSION	PRODUCT NUMBER PRESS-PEG VERSION	COMBINATION NUMBER
88916-101	88916-201	01
88916-102	88916-202	02
88916-103	88916-203	03
88916-104	88916-204	04
88916-105	88916-205	05
88916-106	88916-206	06
88916-107	88916-207	07
88916-108	88916-208	08
88916-109	88916-209	09
88916-110	88916-210	10
88916-111	88916-211	11
88916-112	88916-212	12
88916-113	88916-213	13
88916-114	88916-214	14
88916-115	88916-215	15
88916-116	88916-216	16
88916-117	88916-217	17
88916-118	88916-218	18
88916-119	88916-219	19
88916-120	88916-220	20

NOTES:

- ① PLUGGED (CLOSE) POSITIONS ARE SHOWN SHADED.
- 2. HEATSTAKE VERSIONS SHOWN ABOVE FOR REFERENCE ONLY.








mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection MM		product family METRAL ACC	
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title		
R					angles	linear	MM		RECEPTACLE KEYING MODULE
					0°±2'	.0±.3 .00±.13 .000±.051	scale 1:1		
					dr	S.STONER	4/16/93	dwg no	
					enr	R.DOUTRICH	4/16/93	sheet 4 of 6 size	
					chr	S.STONER	4/16/93	88916 A3	
					appd	S.STONER	4/16/93	type Product Customer Drawing	
sheet index	revision sheet								




FCJconnect.com



Copyright FCJ

PLUG COMBINATIONS – (FRONT VIEW)

PART NUMBER	CONFIGURATION	APPLICABLE NOTES
88916-301		PRESS PEG
88916-302		PRESS PEG
88916-303		PRESS PEG
88916-304		PRESS PEG
88916-305		PRESS PEG
88916-306		PRESS PEG
88916-307		PRESS PEG

PART NUMBER	CONFIGURATION	APPLICABLE NOTES
88916-308		PRESS PEG

1. ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
2. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
3. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.


mat'l. code		surface ISO 1302 <input checked="" type="checkbox"/>		tolerance ISO 406 ISO 1101		projection 		product family METRAL ACC		
ltr	ecn	no	dr	date		tolerances unless otherwise specified		title		
R						angles	linear	RECEPTACLE KEYING MODULE		
						0°±2'	.0±.3 .00±.13 .000±.051	MM		
								scale 1:1		
			dr	S.STONER 4/16/93				dwg no		
			enr	R.DOUTRICH 4/16/93				sheet 5 of 6 size		
			chr	S.STONER 4/16/93				88916		A3
			appd	S.STONER 4/16/93				type		Product Customer Drawing
sheet index	revision sheet									



Copyright FCI

PLUG COMBINATIONS – (FRONT VIEW)

PLUGGED POSITION  
SEE NOTE 1

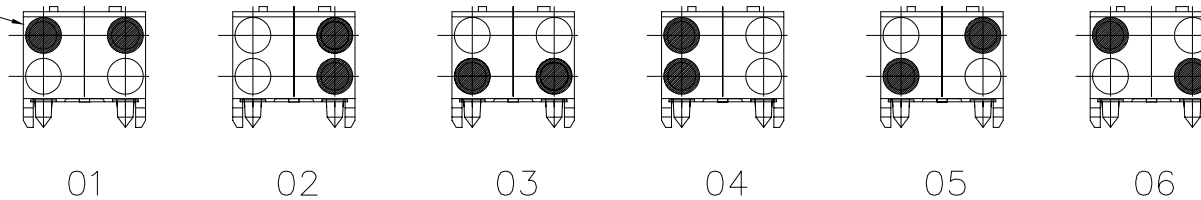

PRODUCT NUMBER	COMBINATION NUMBER
88916-401	01
88916-402	02
88916-403	03
88916-404	04
88916-405	05
88916-406	06

NOTES:

1. PLUGGED (CLOSE) POSITION ARE SHOWN SHADE.
2. ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
3. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
4. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

mat'l. code		surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection ⊕	product family METRAL ACC
ltr	ecn no	dr	date	tolerances unless otherwise specified	title
R				angles linear 0°±2'	RECEPTACLE KEYING MODULE
				.0±.3 .00±.13 .000±.051	MM
				dr S.STONER 4/16/93 enr R.DOUTRICH 4/16/93 chr S.STONER 4/16/93 appd S.STONER 4/16/93	scale 1:1
					FCJ
sheet index	revision sheet				dwg no 88916 sheet 6 of 6 size A3
					type Product Customer Drawing



FCIconnect.com

Copyright FCI