

## Bus system connector - SACC-M12MSD-4CT SH PN - 1411046

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Bus system connector, PROFINET, 4-position, shielded, Plug straight M12, D-coded, Crimp connection, Knurl material: Zinc die-cast, nickel-plated, External cable diameter 5 mm ... 8 mm



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	40.0 g
Custom tariff number	85366990
Country of origin	Germany

### Technical data

#### Dimensions

External diameter	5 mm ... 8 mm
-------------------	---------------

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
Degree of protection	IP67

#### General

Note	Order crimp contacts separately
Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	4
Insulation resistance	≥ 10 GΩ
Coding	D - data
Standards/regulations	M12 connector IEC 61076-2-101
Signal type/category	PROFINET
Status display	No
Overvoltage category	II

## Bus system connector - SACC-M12MSD-4CT SH PN - 1411046

### Technical data

#### General

Pollution degree	3
Connection method	Crimp connection
Conductor cross section	0.34 mm <sup>2</sup> ... 0.5 mm <sup>2</sup>
AWG conductor cross section	22 ... 20
Insertion/withdrawal cycles	≥ 100
Torque	0.6 Nm (M12 knurl)
	1 Nm (Connector with coupling sleeve)
	1 Nm (Pressure nut with coupling sleeve)

#### Material

Flammability rating according to UL 94	HB
Contact carrier material	PA
Material of grip body	Zinc die-cast, nickel-plated
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	FPM (O-ring)
	NBR (Cable clamping)

### Classifications

#### eCl@ss

eCl@ss 5.1	27260701
eCl@ss 6.0	27279221
eCl@ss 8.0	27440102


#### ETIM

ETIM 4.0	EC002635
ETIM 5.0	EC002635

### Drawings


## Bus system connector - SACC-M12MSD-4CT SH PN - 1411046

Schematic diagram



Pin assignment M12 male connector, 4-pos., D-coded, male side

Dimensional drawing

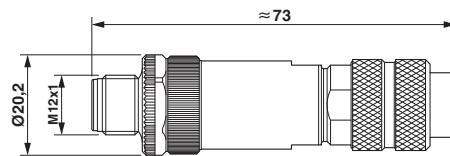

Plug, M12 x 1, straight, shielded