



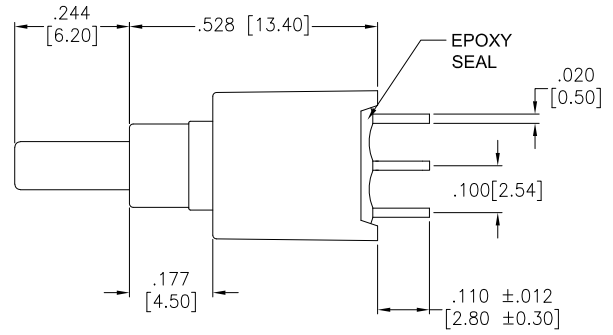


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/30/21	

APPROVED: _____
DATE: _____ TITLE: _____



RECOMMENDED PCB LAYOUT



BUTTON POSITION		
FUNCTION	ON	MOM
TERMINALS	2-1	2-3

SPECIFICATIONS:

Material:
Case: PA9T, Rated UL94V-0, color Red
Plunger: FR52, Rated UL94V-0
Bushing: PA9T, Rated UL94V-0
Movable Contact: Copper Alloy, Gold over Nickel under plate.
Terminal: Copper Alloy, Gold over Nickel under plate.
Electrical:
Rating: 0.4A max @ 20V AC or DC
Contact resistance: 20 mΩ max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,500V RMS @Sea level
Life: 30,000 cycles at full load
Temperature Rating:
Operating temperature: -30°C to +85°C
Environmental:

Sealed IP67 Rated
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	±.10	Ø.X	±.10
.XX	±.020	Ø.XX	±.015
.XXX	±.015	Ø.XXX	±.010

ADAM TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

DRAWN	JJ	9/30/21
CHECKED	RC	9/30/21
APPROVED		

TITLE
SEALED SUB-MINIATURE PUSH BUTTON SWITCH, SPDT, ON-MOM, GOLD PLATED, PCB TAILS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

SIZE X	PART NO. SW-PB9-AAB00A1RE-6	REV. -
REF: S00198T	SCALE: NTS	SHEET 1 OF 1