

F

E


D

C

B


A

FRONT VIEW - FEMALE INSERT




- 1 BLACK #1
- 2 BLACK #2
- 3 BLACK #3
- 4 GREEN/YELLOW

FRONT VIEW - MALE INSERT



- 1 BLACK #1
- 2 BLACK #2
- 3 BLACK #3
- 4 GREEN/YELLOW

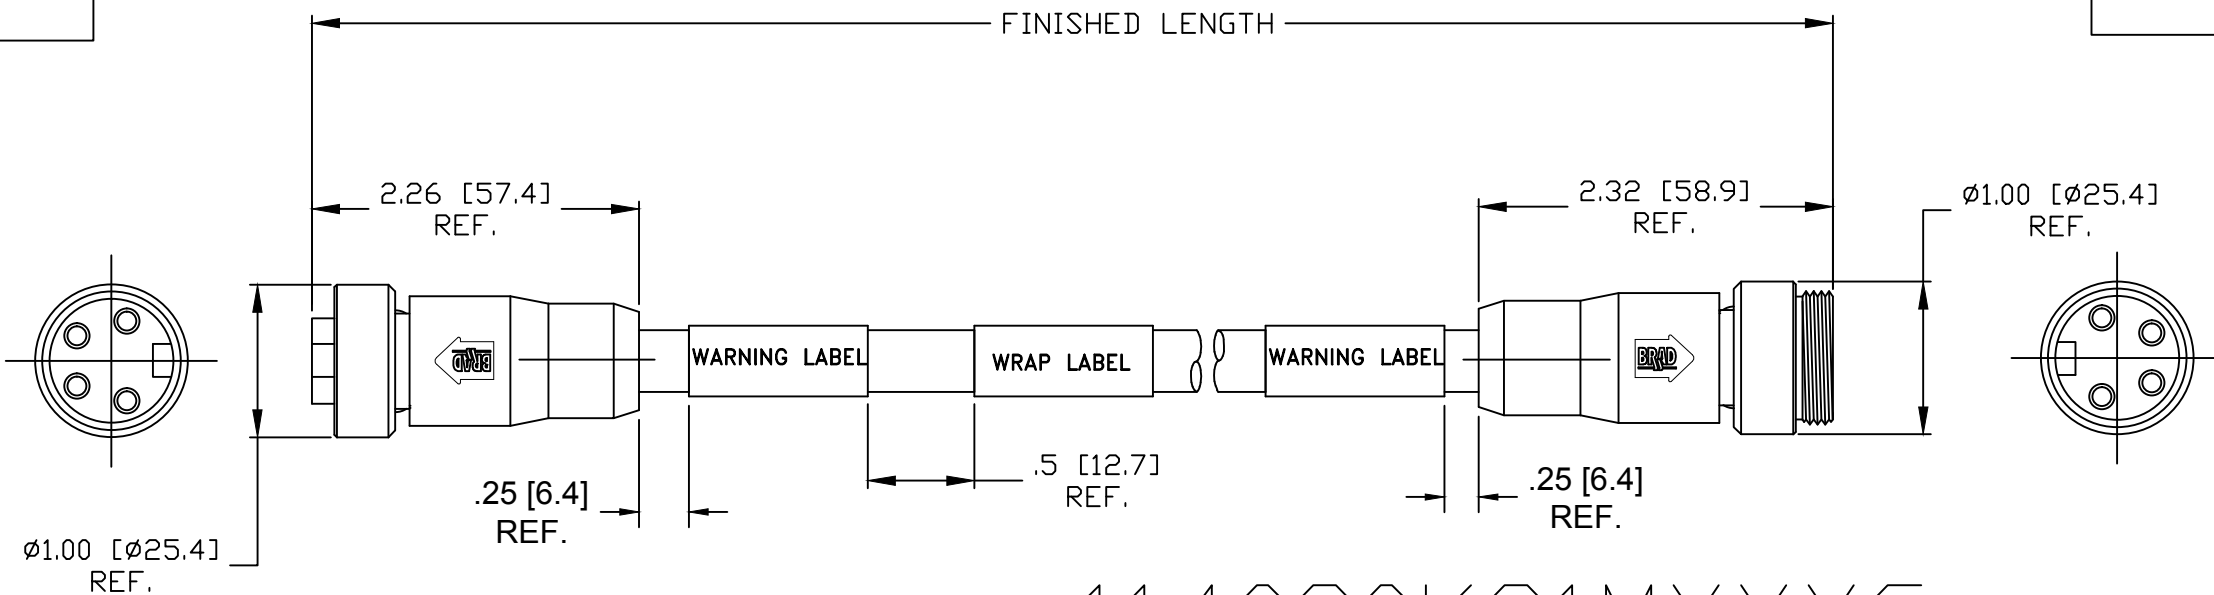

MECHANICAL

CONTACT : GOLD/NICKEL OVER COPPER ALLOY
INSERT : BLACK PVC
COUPLING NUT: ZINC DIE CAST, BLACK E-COAT
MOLDED BODY: BLACK PVC
CABLE: 14 AWG 4 CONDUCTORS BLACK TPE JACKET
CABLE MARKING: [MFG. UL FILE NO.] 14 AWG (2.08mm²)
UL TYPE TC-ER/MTW (UL) THHN/THWN
600V 90C DRY 75C WET OIL RES SUN
RES [MFG. CSA FILE NO.] CSA AWM
I/II A/B 105C W75 1000V -40C FT4

ELECTRICAL

VOLTAGE RATING: 600V AC/DC
AMPERAGE: 15A

ENVIRONMENTAL

PROTECTION: IP67

114030K21MXXXG

Cable type
14/4 AWG
black TPE

Finished Length
M005 = .5 Meters
M010 = 1 Meter

UPDATED DRAWING EC NO: IPG2016-1628 DRWN: GGUSTAFS 2016/06/02 CHKD: MZIELINS 2016/06/15 APPR: BWOODMAN2015/11/09 B	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE INCH/MM		SCALE NTS	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
		 =0  =0		mm	INCH	DRAWN BY DATE	TITLE MINI CHANGE ASSEMBLY 4P MALE/FEMALE 14/4 AWG TPE BLACK				
			4 PLACES	±---	±---	KCOX01 2015/10/19					
			3 PLACES	±---	±---	CHECKED BY DATE					
			2 PLACES	±---	±---	BARDEN 2015/10/19	MOLEX INCORPORATED				
			1 PLACE	±---	±---	APPROVED BY DATE					
		ANGULAR ±---°			JFMURPHY 2015/11/09						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE MATRIX		DOCUMENT NO. SD-130062-023				SHEET NO. 1 OF 1		
			SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							