



PERFORMANCE CHARACTERISTICS

- CURRENT RATING: 1.5A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10<sup>4</sup> MΩ MIN

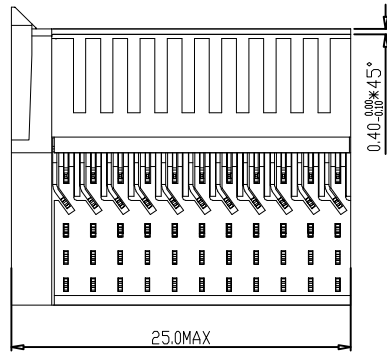

- NOTES
- HM2R30PAS100-LF LEAD FREE INDICATOR (LF=LEAD FREE)  
PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC 201844.003)
  - FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BSA.201572.001
  - THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-004
  - THIS DIMENSION APPLIES ONLY AFTER PRESS FITTING THE CONNECTOR TO BOARD.

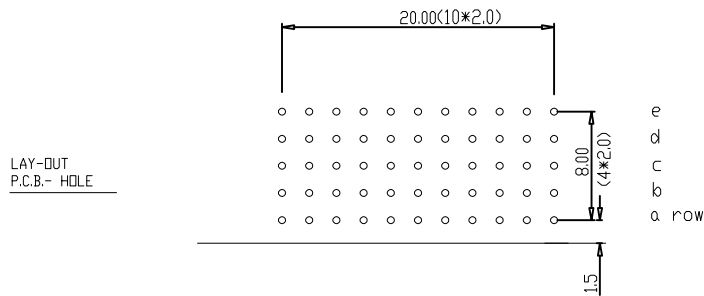

mat'l. code		surface	tolerance	projection	product family
		ISO 1302	ISO 406 ISO 1101		MILLIPACS
ltr	ecn no	dr	date	title	
A	105-0093	KN	14-09-01	MPACS 5+2R RA	
B	105-0093	Mini	11-06-05	RCP CONN TYPE C	
C	DG05-0278	Kason	02-08-05	scale 2.000	
D	DG07-0362	Kason	05-09-07	Amphenol FCi	dwg no
E	DG10-0110	NZ	03-22-10		sheet 1 of 1
F	ELX-I-32526	MS	03-02-19		size
					A4
sheet	revision	F		type Product Customer Drawing	
index	sheet	1			