

# CR2 LITHIUM MANGANESE DIOXIDE



## Features & Benefits


- Operating temperature range between -40° C to +70° C
- High current pulse discharge capability
- Stable voltage level during discharge
- High safety and reliability

## Specifications


Nominal Capacity:	850 mAh
Nominal Voltage:	3V
Weight:	Approximately 11g
Operating Temperature:	-40°C - +70°C*

\*Please consult Panasonic for use below and above -20°C to +60°C

## Dimensions

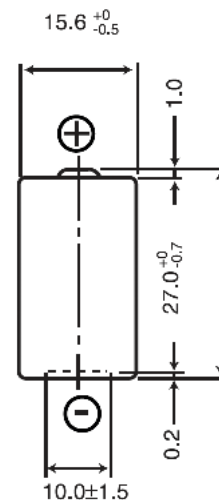


## Temperature Characteristics

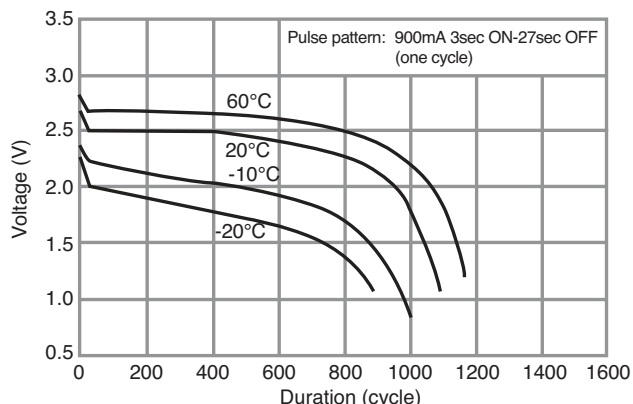


\*Please consult Panasonic for use below and above -20°C to +60°C


## Continuous Discharge Characteristics (60°C)

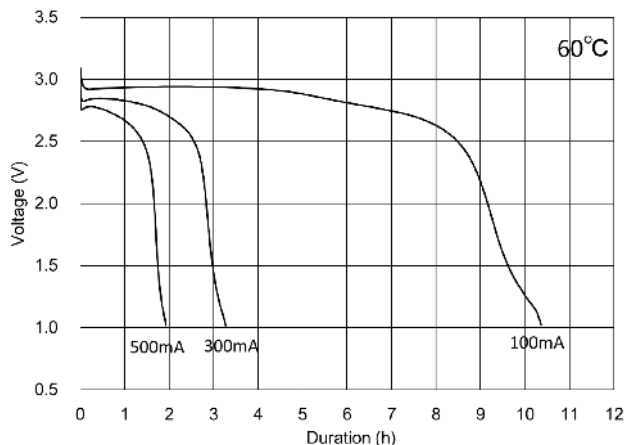

## Continuous Discharge Characteristics (20°C)

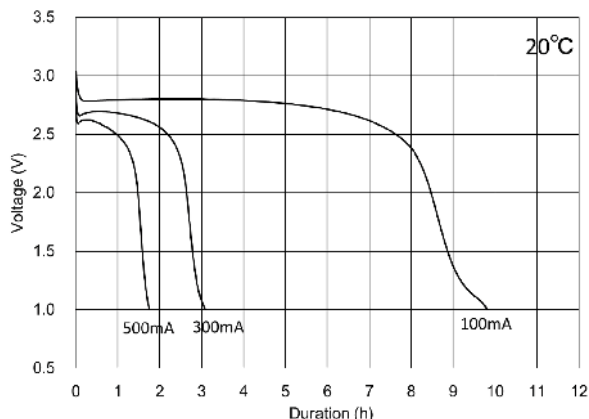

## Continuous Discharge Characteristics (-20°C)

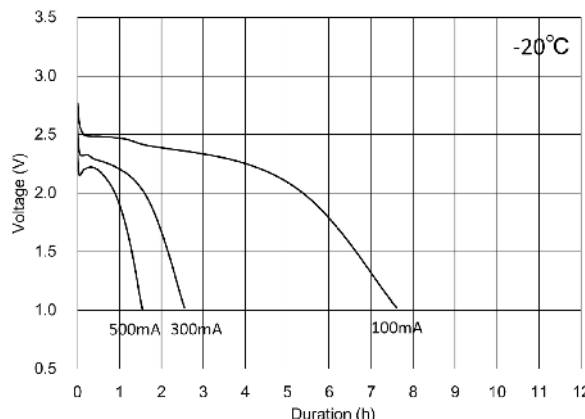

For more information on how Panasonic can assist you with your battery power solution needs call **877-726-2228**, visit [www.na.industrial.panasonic.com/products/batteries](http://www.na.industrial.panasonic.com/products/batteries) or e-mail [oembatteries@us.panasonic.com](mailto:oembatteries@us.panasonic.com).

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.