引き出し方向
PULL OUT DIRECTION

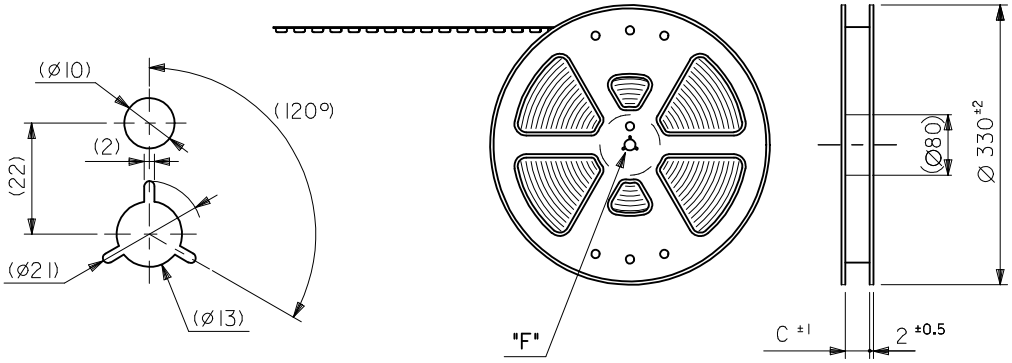

DETAIL "F"

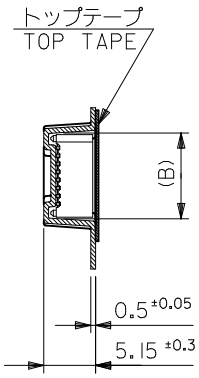

SECT. Z-Z

引き出し方向
PULL OUT DIRECTION

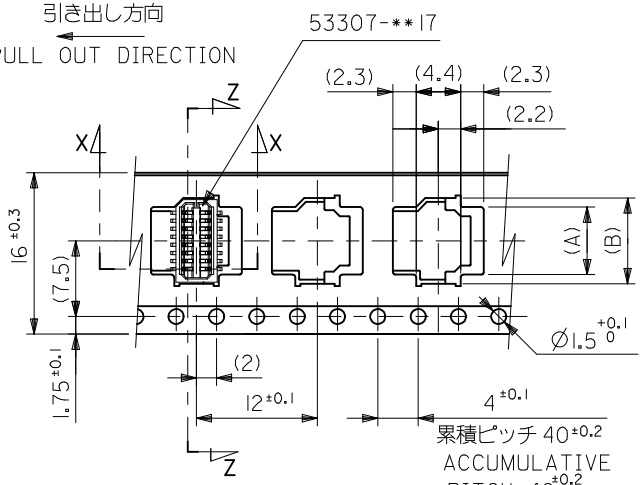

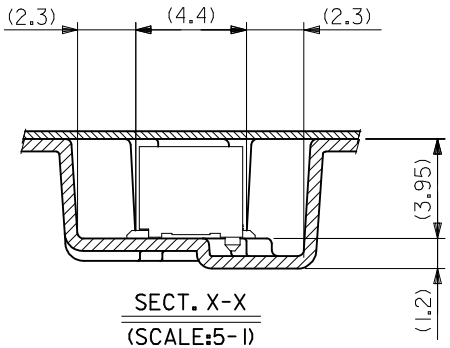

SECT. X-X
(SCALE:5-1)

16mm幅キャリアテープ
16mm WIDTH CARRIER TAPE

注記 NOTES

1. 梱包数量：1000個／リール NUMBER OF CONNECTORS:1000PCS/REEL
2. リードテープ長さ LEAD TAPE LENGTH

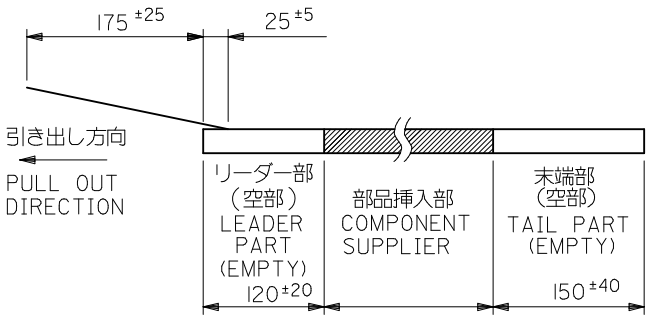

3. トップテープの剥離強度：（剥離方向は下図参照）
0.1N～0.7N(10.2gf～70.4gf) 尚、本規格値は、出荷時に適用。
（但し、輸送時に剥離が発生しない事。）
PEELING OFF FORCE OF TOP TAPE : 0.1N～0.7N(10.2gf～70.4gf)
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLITED AT SHIPMENT
PEEL OFF SHOULD NOT BE ALLOWED,
DURING TRANSPORTATION

4. 材料
キャリアテープ：ポリプロピレン（PP）
トップテープ：PET，PE，PEF
リール：ポリスチレン（PS）<リサイクル材を含む>
MATERIAL CARRIER TAPE:POLYPROPYLENE
TOP TAPE:PET,PE,PEF
REEL:POLYSTYREN(PS)
<RECYCLE MATERIAL CONTAINED>

16	17.5	6.1	4.3	53307-1090	10
キャリアテープ幅 CARRIER TAPE WIDTH	C	(B)	(A)	MATERIAL NO.	極数 CIRCUIT

MODEL NO. 53307-**90

REVISED
EC NO: J2009-1496 2008/12/16
DRWN:NAKAMURAA 2008/12/16
CH'KD:T.HARUYAMA 2009/01/16
APPR:NUKITA
DESCRIPTION
REV B

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±---
10 OVER 30 UNDER	±---
30 OVER	±---
ANGULAR ±--- °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY	SCALE: ---	DESIGN UNITS: METRIC	THIRD ANGLE PROJECTION

DRAWN BY: S.MATSUZAKI DATE: '96/3/5
CHECKED BY: T.ITO DATE: '01/01/30
APPROVED BY: M.FUKUSHIMA DATE: '01/01/30
MATERIAL NO.: SEE TABLE

TITLE: 0.8 BTB CONN WAFER ASSY ST SMT W/BOSS EMBSTP PKG

molex MOLEX INCORPORATED

DOCUMENT NO.: SD-53307-026
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION