
GRACE INERTIA 3.3 TE Internal #: 2-1971906-4 Rectangular Power Connectors, Header, Plug, Wire-to-Board, 8 Position, 3.3 mm [.129 in] Centerline, Printed Circuit Board, UL 94V-0, GRACE INERTIA 3.3

#### View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

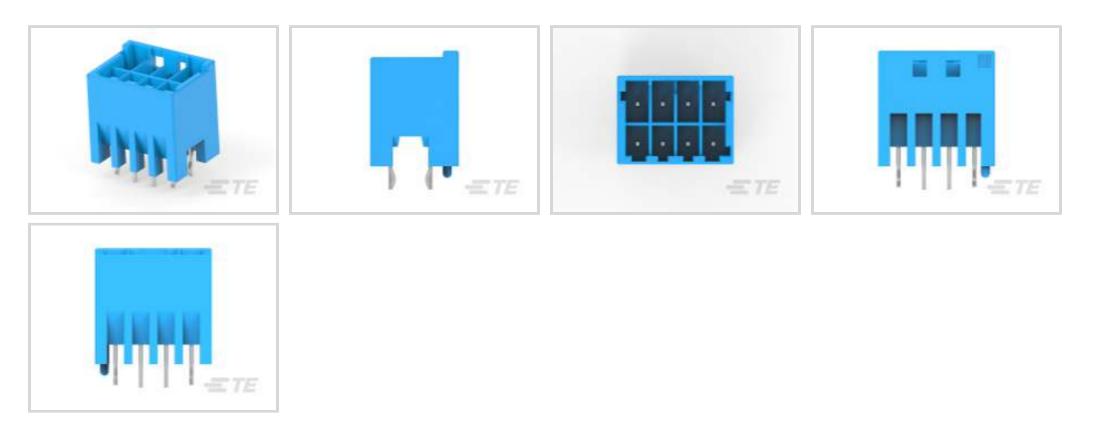

Rectangular Power Connector Type: Header Connector & Housing Type: Plug

Connector System: Wire-to-Board

Number of Positions: 8

Centerline (Pitch): 3.3 mm [.129 in ]

# Features



#### Product Type Features

Header Type	Fully Shrouded
Rectangular Power Connector Type	Header
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Positions	8
Number of Positions PCB Mount Orientation	8 Vertical
PCB Mount Orientation	Vertical
PCB Mount Orientation Number of Power Positions	Vertical 8
PCB Mount Orientation Number of Power Positions Number of Rows	Vertical 8

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 8 Position, 3.3 mm [.129 in] Centerline, Printed Circuit Board, UL 94V-0, GRACE INERTIA 3.3



Connector & Keying Code	В
Contact Features	
Mating Post Length	6.6 mm[.26 in]
PCB Contact Termination Area Plating Material Thickness	2 µm[78.74 µin]
Contact Layout	Matrix
Mating Tab Width	.5 mm[.02 in]
Contact Underplating Material Thickness	1.25 μm[49.21 μin]
Contact Mating Area Plating Material	Tin
Contact Underplating Material	Nickel
Contact Base Material	Brass
Contact Current Rating (Max)	4 A
Contact Retention Within Housing	Without
Contact Type	Pin
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	2 μm[78.74 μin]
Termination Features	
Termination Post & Tail Length	3 mm[.118 in]

Through Hole - Solder

# Mechanical Attachment

PCB Mount Alignment Type	Locating Posts
Mating Alignment Type	Keyed
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	With
PCB Mount Retention Type	Kinked
Mating Retention Type	Latch
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	3.3 mm[.129 in]
Housing Color	Blue
Housing Material	PA 66 GF

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 8 Position, 3.3 mm [.129 in] Centerline, Printed Circuit Board, UL 94V-0, GRACE INERTIA 3.3



#### Dimensions

Connector Height	14.25 mm[.561 in]
PCB Thickness (Recommended)	1.6 mm[.06 in]
Product Length	15.3 mm[.602 in]
Row-to-Row Spacing	5.2 mm[.205 in]
Usage Conditions	
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Operation/Application	
Circuit Application	Power
Circuit Application Industry Standards	Power
	Power UL 94V-0
Industry Standards	
Industry Standards UL Flammability Rating	UL 94V-0
Industry Standards UL Flammability Rating Glow Wire Rating	UL 94V-0

# Product Compliance

#### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability
Product Compliance Disclaimer This information is provided based on reasonable inquiry of our suppliers an based on the information they provided. This information is subject to change EU RoHS compliant have a maximum concentration of 0.1% by weight in how chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadin limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished e will be CE marked as required by Directive 2011/65/EU. Components may no	ge. The part numbers that TE has identified as nogenous materials for lead, hexavalent nium, or qualify for an exemption to these lectrical and electronic equipment products

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 8 Position, 3.3 mm [.129 in] Centerline, Printed Circuit Board, UL 94V-0, GRACE INERTIA 3.3



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts




TE Part # 1-1971906-3 HEADER ASSY 6POS,KEYING-A,NEW GIC3.3

# Also in the Series | GRACE INERTIA 3.3



# Customers Also Bought

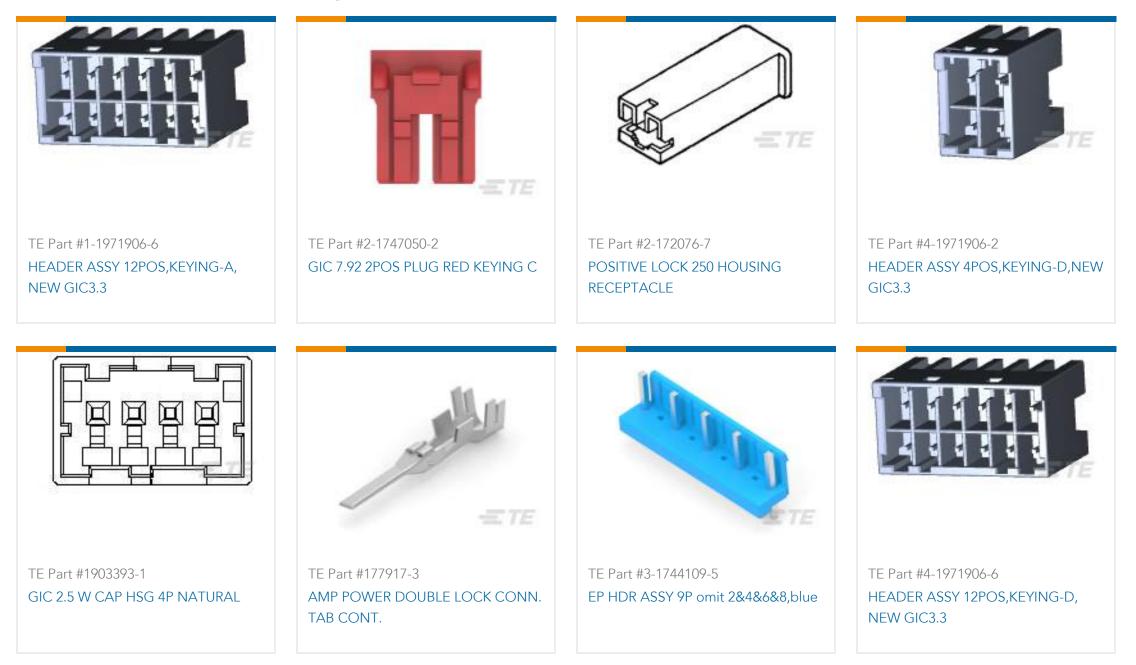

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 8 Position, 3.3 mm [.129 in] Centerline, Printed Circuit Board, UL 94V-0, GRACE INERTIA 3.3



TE Part #1-1376388-3 5.0 PK CONN. 2P PLUG HSG (W/O GF) - RED

# Documents

**Product Drawings** HEADER ASSY 8POS, KEYING-B, NEW GIC3.3

English

**CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_2-1971906-4\_A\_c-2-1971906-4-a.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-1971906-4\_A\_c-2-1971906-4-a.3d\_igs.zip

English

**Customer View Model** 

#### ENG\_CVM\_CVM\_2-1971906-4\_A\_c-2-1971906-4-a.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages 5-1773465-4-GI3.3Flyer

English

7-1773465-7-GI3.3-ChineseFlyer

GI3.3\_QRG\_CN

**Product Specifications** 

**Application Specification** 

English

**Product Environmental Compliance TE Material Declaration** 

English