



SAW Components

Data Sheet B4041

Data Sheet

A large, stylized, 3D-rendered graphic of the EPCOS logo. The letters "EPCOS" are rendered in a bold, sans-serif font, appearing to be part of a curved, metallic-looking structure. The background is dark and textured, suggesting a globe or a complex circuit board layout.



SAW Components

B4041

Low-Loss Filter for Mobile Communication

2450,0 MHz

Data Sheet




Ceramic package DCC6C

Features

- Low-loss RF filter for ISM 2450 MHz
- Low amplitude ripple
- Usable passband 97 MHz
- Package for Surface Mounted Technology (SMT)
- Ceramic SMD package

Terminals


- Gold-plated Ni

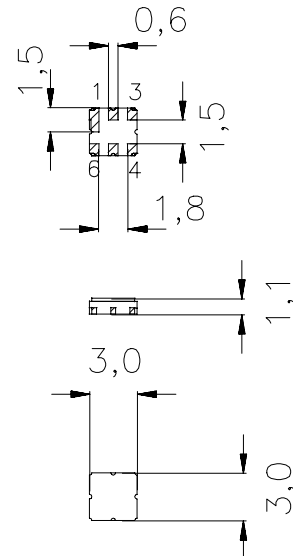

Dimensions in mm, approx. weight 0,037 g

Pin configuration

- 2 Input
- 5 Output
- 1, 3, 4, 6 Ground, to be grounded

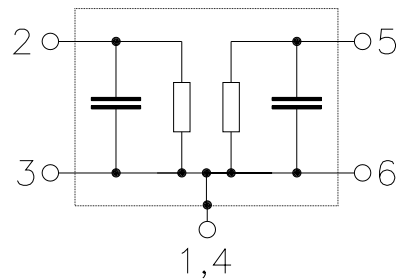

Type	Ordering code	Marking and Package according to	Packing according to
B4041	B39252-B4041-U410	C61157-A7-A67	F61074-V8088-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operating temperature range	T	- 40/+ 85	°C	source impedance 50 Ω
Storage temperature range	T_{stg}	- 40/+ 85	°C	
DC voltage	V_{DC}	0	V	
Input Power max.	P_{IN}	7,5	dBm	



SAW Components

B4041

Low-Loss Filter for Mobile Communication

2450,0 MHz

Data Sheet



Characteristics

Operating Temperature Range: $T = -40^{\circ}\text{C}$ to 85°C
 Terminating source impedance: $Z_S = 50\Omega$
 Terminating load impedance: $Z_L = 50\Omega$

		min.	typ.	max.	
Center frequency	f_C	—	2448,5	—	MHz
Maximum insertion attenuation	α_{\max}				
2400,0 ... 2497,0 MHz		—	2,9	4,0	dB
		—	2,6*	3,0*	dB
Amplitude ripple	$\Delta\alpha$				
2400,0 ... 2497,0 MHz		—	1,4	2,7	dB
Attenuation	α				
0,00 ... 1785,00 MHz		15	19	—	dB
1785,00 ... 2100,00 MHz		18	22	—	dB
2100,00 ... 2300,00 MHz		24	28	—	dB
2600,00 ... 2800,00 MHz		22	26	—	dB
2800,00 ... 3100,00 MHz		24	28	—	dB
3100,00 ... 4200,00 MHz		20	25	—	dB
4200,00 ... 5000,00 MHz		7	10	—	dB

* alternative operating temperature range ($T = -10^{\circ}\text{C}$ to 55°C) for indoor application



SAW Components

B4041


Low-Loss Filter for Mobile Communication

2450,0 MHz


Data Sheet



Transfer function

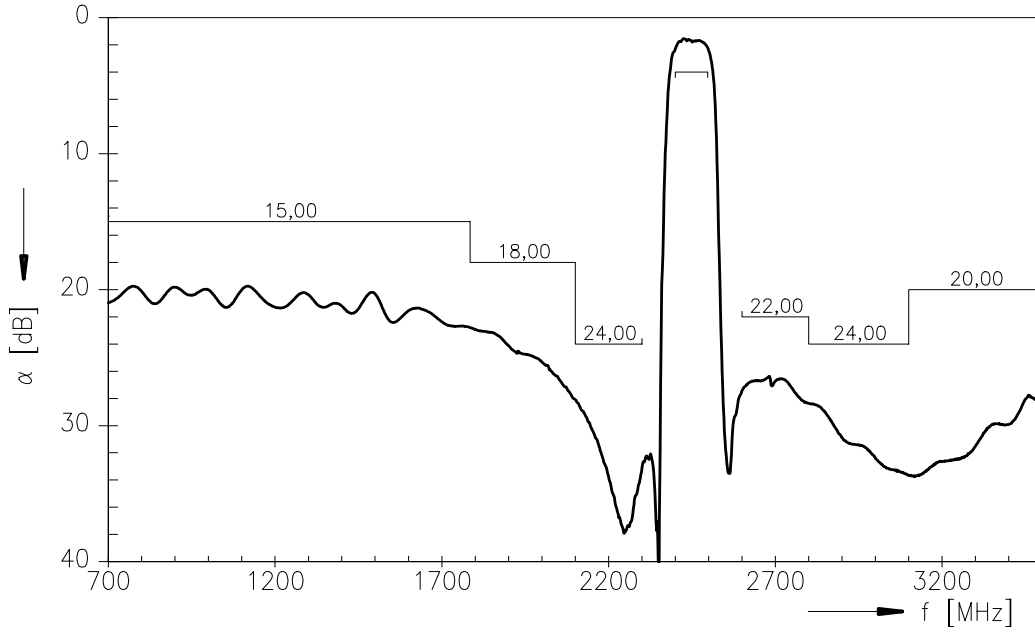


Transfer function (passband)

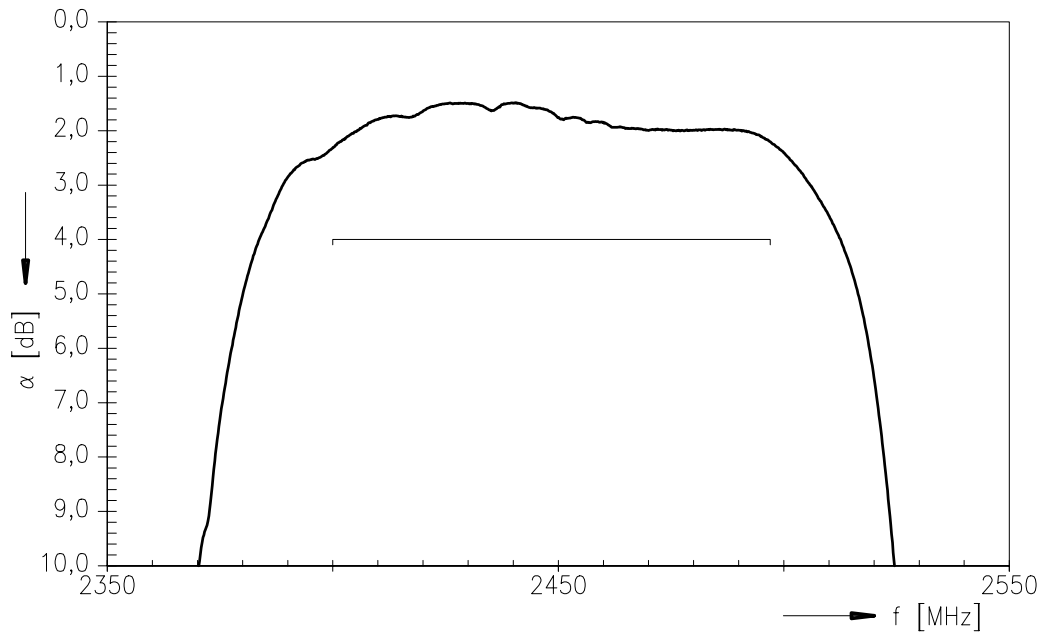



Transfer function (wideband)

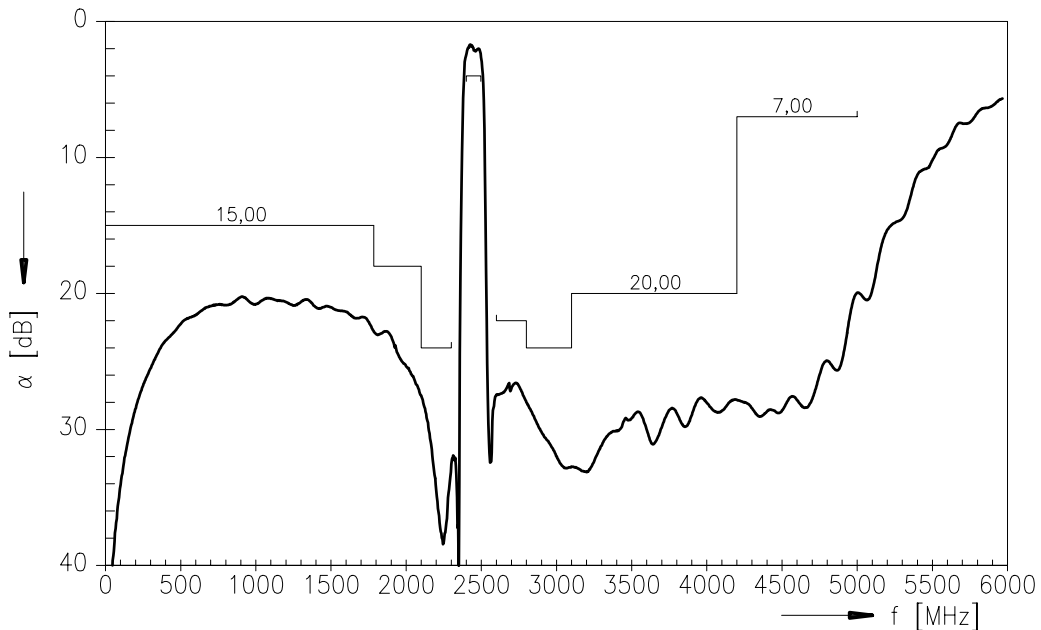

Published by EPCOS AG

Surface Acoustic Wave Components Division, OFW E MF

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.