
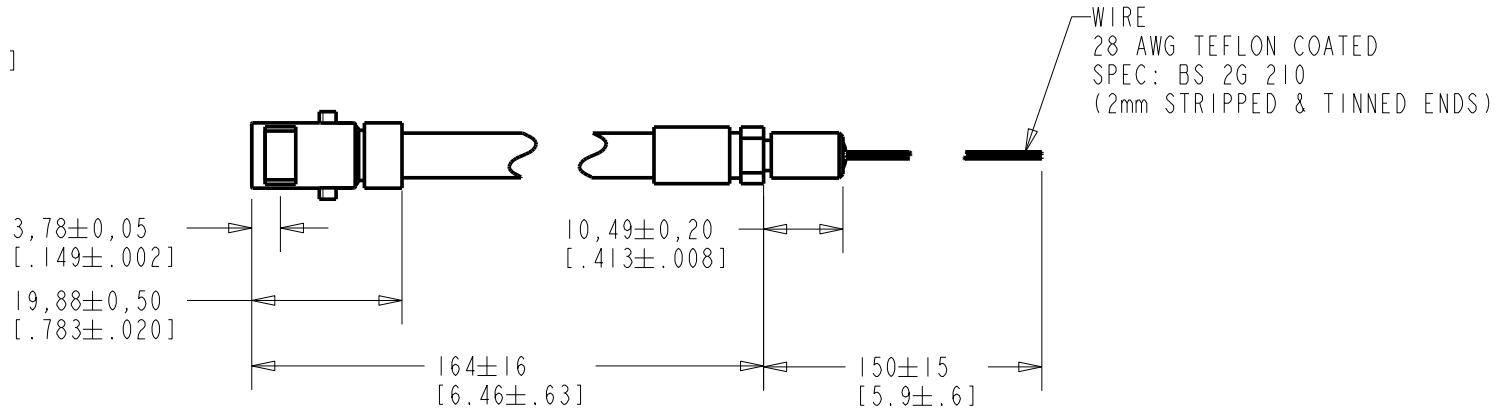



FB-F0-23225-000
SHT 1.1

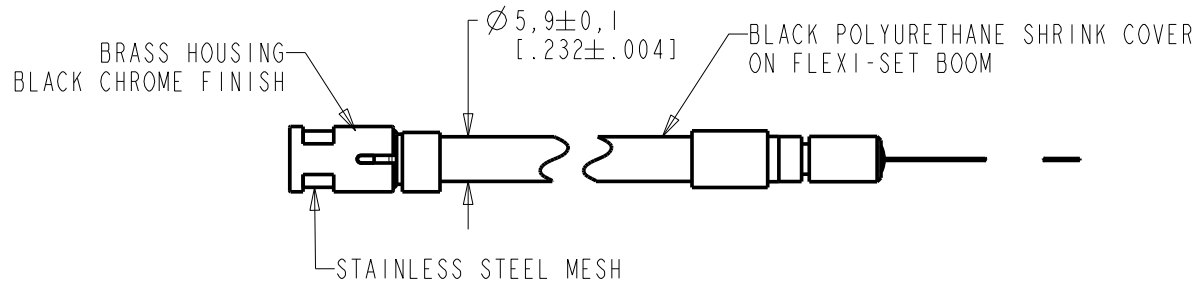


WIRE COLOR			WEIGHT GRAMS
+ve	-ve	SCREEN	
RED	BLACK	GREEN	28.8

DIMENSIONS IN MILLIMETERS [INCHES]

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
C	C10107748	8-12-08	Active	C
B	C10106597	10-23-07		
A	M10101086	6-4-06		

SCALE: 1:1	DR. BY: DATE
DO NOT SCALE DRAWING	MMM 6-1-06
TITLE: BOOM MICROPHONE FB-F0-23225-000	CK. BY: DATE
OUTLINE DRAWING	GJP 6-7-06
SHT 1.1	APP. BY: DATE
	GJP 6-7-06


KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

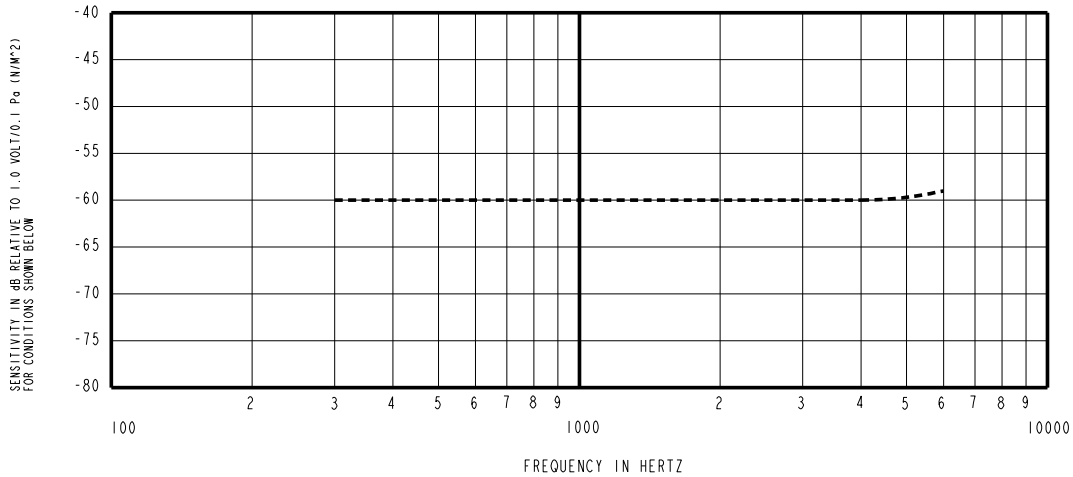

NOTES:

- MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- SENSITIVITY VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.
- SENSITIVITY

FREQUENCY	MIN	NOM	MAX
300	-64.0	-60.0	-56.0
1000	-63.0	-60.0	-57.0
4000	-64.0	-60.0	-56.0
- TEST CONDITIONS:
HEAD OF BOOM EXPOSED TO 94 dB SPL SWEPT SOUND FIELD AT 6mm FROM VOICE APERTURE.
ARTIFICIAL VOICE: B & K 4227 MOUTH SIMULATOR.
- FOR MICROPHONE CAPSULE SPEC. SEE NR-23160-000 SHEET 2.1

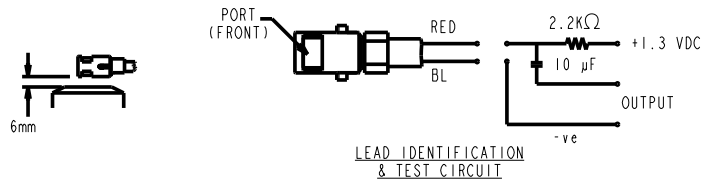

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
C	C10107748	8-12-08	Active	C
B	C10106597	10-23-07		
A	M10101086	6-4-06		

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION

TITLE: **BOOM MICROPHONE** **FB-F0-23225-000**
PERFORMANCE SPECIFICATION **SHT 2.1**

DR. BY	DATE
MMM	6-1-06
CK. BY	DATE
GJP	6-7-06
APP. BY	DATE
GJP	6-7-06