

± I	Q	н <b>г</b>	m	0



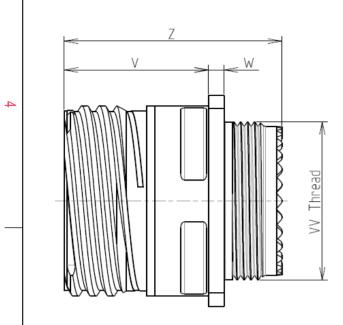

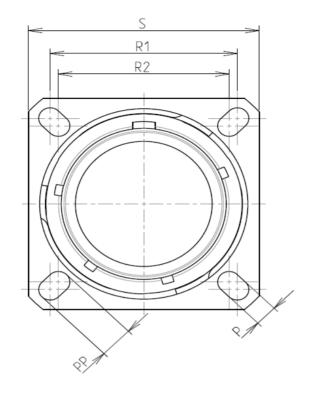

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium				
	-Shell Plating	: Nickel				
	-Insulator	: Thermoplastic				
	-Contacts	: Copper Alloy				
	-Seals & Grommet	: Silicon Elastomer				
$\sim$	-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
	-Durability	: 500 Mating cycles				
	-Delivered with Souriau contacts and Accessories					
	-Temperature Range	-65°C to +200°C				
	-Salt Spray	: 48 hours				
	-Mass	: 11.5 g ± 10%				

8D 0

G

11

-

F

22

А

F

Ν


P 3.25±0.2   PP 4.93±0.2   R1 20.62   R2 18.26   S 26.2±0.3   V 20.83+0/-1.25   W 2.1/2.5   Z 31.5 Max	PP 4.93±0.2   R1 20.62   R2 18.26   S 26.2±0.3   V 20.83+0/-1.25   W 2.1/2.5   Z 31.5 Max	PP 4.93±0.2   R1 20.62   R2 18.26   S 26.2±0.3   V 20.83+0/-1.25   W 2.1/2.5   Z 31.5 Max	Dim	Nominal
R1 20.62   R2 18.26   S 26.2±0.3   V 20.83+0/-1.25   W 2.1/2.5	R1 20.62   R2 18.26   S 26.2±0.3   V 20.83+0/-1.25   W 2.1/2.5   Z 31.5 Max	R1 20.62   R2 18.26   S 26.2±0.3   V 20.83+0/-1.25   W 2.1/2.5   Z 31.5 Max	Р	3.25±0.2
R2 18.26   S 26.2±0.3   V 20.83+0/-1.25   W 2.1/2.5	R2 18.26   S 26.2±0.3   V 20.83±0/-1.25   W 2.1/2.5   Z 31.5 Max	R2 18.26   S 26.2±0.3   V 20.83+0/-1.25   W 2.1/2.5   Z 31.5 Max	PP	4.93±0.2
S 26.2±0.3   V 20.83+0/-1.25   W 2.1/2.5	S 26.2±0.3   V 20.83+0/-1.25   W 2.1/2.5   Z 31.5 Max	S 26.2±0.3   V 20.83+0/-1.25   W 2.1/2.5   Z 31.5 Max	R1	20.62
V 20.83+0/-1.25   W 2.1/2.5	V 20.83+0/-1.25   W 2.1/2.5   Z 31.5 Max	V 20.83+0/-1.25   W 2.1/2.5   Z 31.5 Max	R2	18.26
W 2.1/2.5	W 2.1/2.5   Z 31.5 Max	W 2.1/2.5   Z 31.5 Max	S	26.2±0.3
	Z 31.5 Max	Z 31.5 Max	V	20.83+0/-1.25
Z 31.5 Max			W	2.1/2.5
	/V THREAD M15x1-6g	/V THREAD M15x1-6g	Z	31.5 Max
/V THREAD M15x1-6g			VV THREAD	M15x1-6g


ORIENTATION : N

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-22



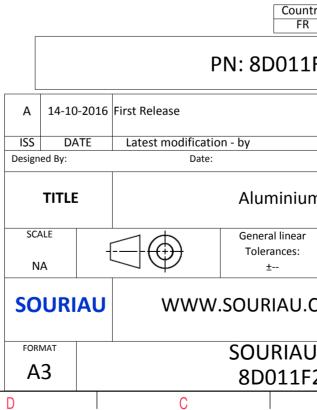

	σ		A		
		-			
M	P	0			4
11	· CE				
		1			
	10/2	1			
	1				
					0
AS EXA	AMPLE				3
	non-conformit				
er of t	h does not co: he Parties or b	oy a third par	ty		
ndatio	on, technical n	otice.)			
untry FR	Jurisd	liction & Con Not Listed			0
		NUL LISTED			2
1F2	22AN				
				J	
				MOD N°	
		CUSTOME	R DRAWING		
um Receptacle 8D series					
ar	NPRDS / PROJECT				
•			159	perty of	1
J.CC	DM		cument is the prop SOURIAU st not be reproduc		
			nicated without pe		
	DRG N°			SHEET	
F22	2AN-C		٨	1/2	J
	В	I	А		

		_				
		Contact Layout				Panel Cuto
		22*				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
4	(	0 0 <sup>4</sup> c <sup>0</sup> 0 <sub>8</sub>			× -	
	Ctc	4#22D 11-22 X Y			<u>v</u>	
ى	A B C D	1.905 1.905   1.905 -1.905   -1.905 -1.905   -1.905 1.905				Dim ØA ØAA
						R1 ØT
	<b>-</b>					SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
2						Count FR PN: 8D011
					A 14-10-20 ISS DATE Designed By:	116 First Release Latest modification - by Date:
					TITLE	Aluminiur General linear
<b>_</b>					NA SOURIA	U WWW.SOURIAU.
				_	FORMAT A3	SOURIAL 8D011F
	Н	G	F	E	D	C

Т

ш

т

G

0

