Ceramic Monoblock Duplex Filter



Model KFF6075B Technical Data

Features:

- High Power
- Exceptional Performance
- Rugged Bracket Mounting

Description and Applications:

A high power duplexer suitable for mobile applications in the 800MHz cellular band.



Electrical Specifications

Antenna to TX Response	Frequency	Specifications @ 25° C
Insertion Loss	824 MHz to 849 MHz	2.5 dB max.
Return Loss		9.5 dB min.
Attenuation	869 MHz to 894 MHz	60 dB min.
Antenna to RX Response	Frequency	Specifications @ 25° C
Insertion Loss	869 MHz to 894 MHz	2.5 dB max.
Return Loss		7.5 dB min.
Attenuation	824 MHz to 849 MHz	65 dB min.
Power Rating		5 W
Impedance		50 Ω

NOTE: Supplier shall test each filter to the critical electrical specifications listed above or better. Any subsequent audits may deviate due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:

 Specification
 Allowance

 Insertion Loss
 0.1 dB

 Return Loss
 1.0 dB

 Stopbands
 1.0 dB


Rev. 1




Typical Response Curve

Frequency, MHz 675 725 775 825 875 925 975 1025 0 -10 -20 Attenuation/Return Loss dB -30 -40 -50 -60 -70 -80 -90 -100


Mechanical Dimensions

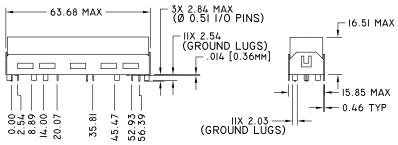

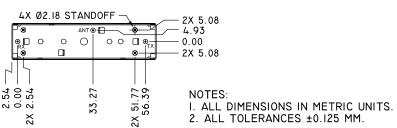


Part Marking

Y = LAST DIGIT OF YEAR WW = SEQUENTIAL WEEK NUMBER




PC Board Layout



VIEW LOOKING DOWN ON FILTER TO PC BOARD ALL DIMENSIONS NOMINAL

Packaging

This product is shipped in pre-formed foam trays.



Contact Information:

CTS WIRELESS COMPONENTS INC. / 171 Covington Drive / Bloomingdale, IL 60108 PHONE: (800) 757-6686 / FAX: (630) 924-6610 / www.ctscorp.com

Document Control #6287044Y01 Rev 1 Date of Origin 02/22/01

Date of Origin 02/22/01

Date of Revision 02/22/01