



PERFORMANCE CHARACTERISTICS

- CURRENT RATING: 1.5 A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE: 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE : 20 m Ω MAX
- INSERTION FORCE: 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN /CONT
- INSULATION RESISTANCE: 10⁴ MΩ MIN

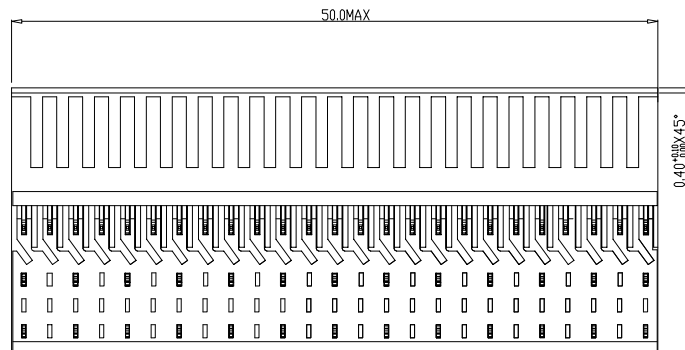

NOTES

1. LEAD FREE INDICATOR :LF=LEAD FREE
2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

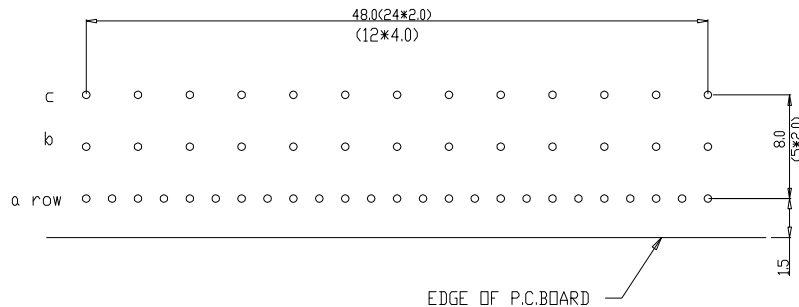

Material		Spec ref	
Mat code	Heatreat	✓	TOLERANCE
Plating/Finish	Dr		1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1°HÖEKEN
Dr 10 2 92	J.V.B	size	MM
Eng		Product family	A1
Chr		Model Name	ECN
Appr		Model Revision	REL Level
D	IG07-0362	kaszon	05/09/07
E	DG10-0110	NZ	05/30/10
06	BEC 9.3546	RM	11-06-01
FCI		MPACS 5+2R RA RCP CONN TYPE B	BS.C .202468.004
Pro/E file		CAT.NO. HM2R02PACA10----	CUSTOMER DRAWING
		Rev.	E
		sheet 1 of 1	

This drawing is the property of FCI. It is to be used for manufacturing purposes only. No part of this drawing may be reproduced without the written permission of FCI. Copyright © 2011.