
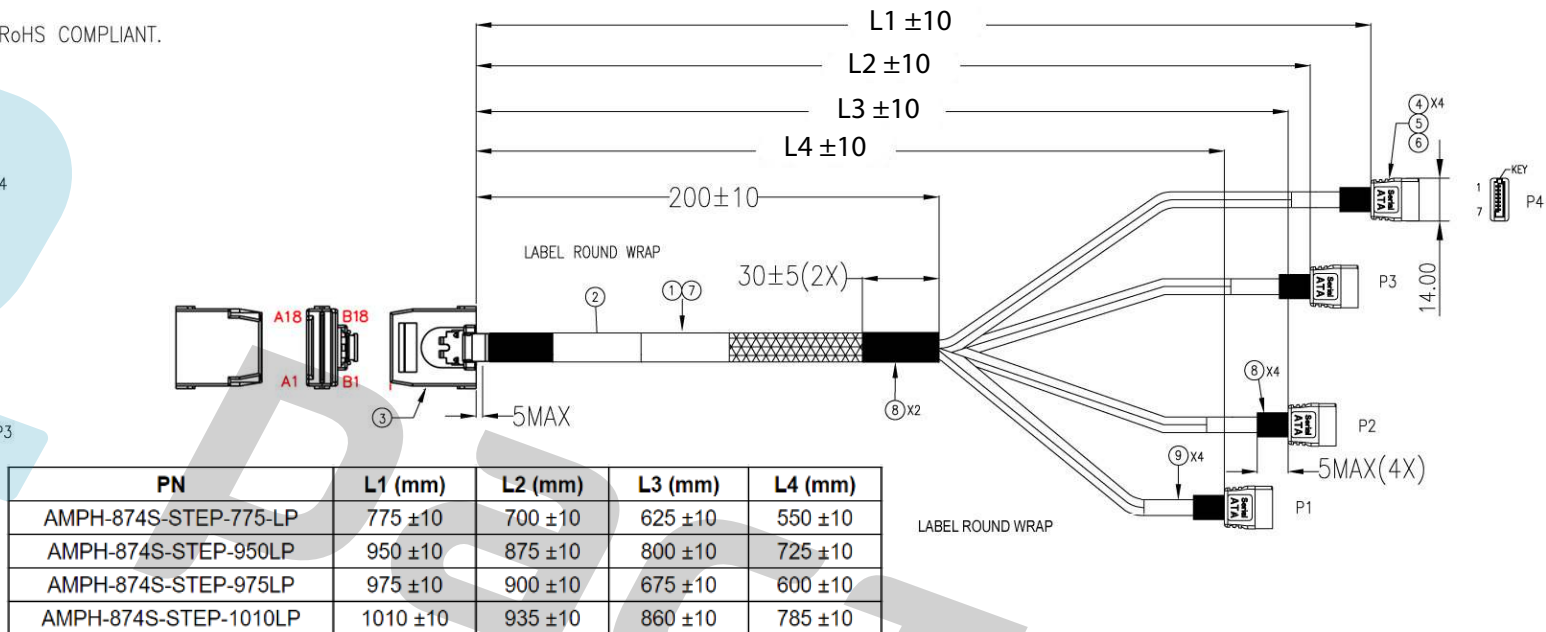


The marking on this product doesn't contain environmental hazardous, materials per directive 2011/65/EC for RoHS compliant.

NOTE:  
 1.ELECTRICAL AND MECHANICAL PERFORMANCE SHOULD MEET THE SAS2.1 INDUSTRIAL STARDAND.  
 2.THE CABLE ASSEMBLY SHOULD BE RoHS COMPLIANT.

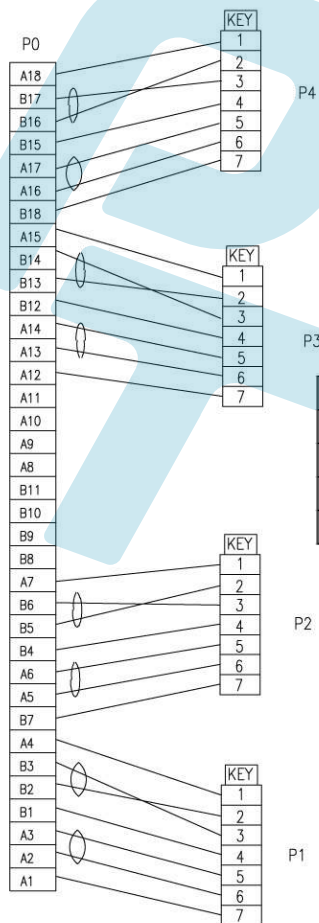

9	RMLSB30121	LABEL:30*12MM,WHT	4	
8	RMMTP00036	ACETOUS Tape:30mm WIDE,30M/REEL,BLK	A/R	
7	RMTBD00501	EXPANDO TUBE:OD=5MM,BLACK	A/R	
6	RMRPV45101	OVERMOLD, PVC, BLACK	A/R	
5	HMRPE45NT1	PE-LOW DENSITY,CLEAR	A/R	
4	G16A31001M	SATA CONN:7P,F,STR,Au 15u"	4	
3	AST8087-0036	SFF8087,36P MINI SAS,STRAIGHT,BLACK	1	
2	HMLSB57262	LABEL:57*26MM,BLANK, WHT,R2,HF	1	
1	202023001	SAS CBL:30AWG*2C+2EAM,0.9*2.3,NATURAL	A/R	
ITEM	VENDOR	VENDOR P/N	DESCRIPTION	QTY

APPROVED BY  
 COMPANY: \_\_\_\_\_  
 PURCHASING/ENGINEER: \_\_\_\_\_  
 DATE: \_\_\_\_\_

For Customer Made Items Order:

- \* Minimum \$200 value
- \* NCNR (Non-cancelable & non-returnable)
- \* One time tooling charge, if any, need to be paid in advance with P.O.
- \* All drawings of First Articles, if any, must be approved with authorized signature & date.
- \* Turn around time counted ARO (After Received FA or drawing approval)

GENERAL TOLERANCES

.X:	± 0.5
.XX:	± 0.3
.XXX:	± 0.01
ANGULAR:	± 1°



DRAWN: G. Lei DATE: 1/23/2014  
 CHECKED: A. Chui DATE: 1/23/2014  
 APPROVED: J. Lai DATE: 1/23/2014

**Amphenol**

TITLE: MINI SAS 36P STR TO 4XSATA 7P  
 DWG. No.: AMPH-874S-STEP-740-LP  
 SCALE: NONE SHEET 1 OF 1  
 UNIT: MM SIZE: REV.: B