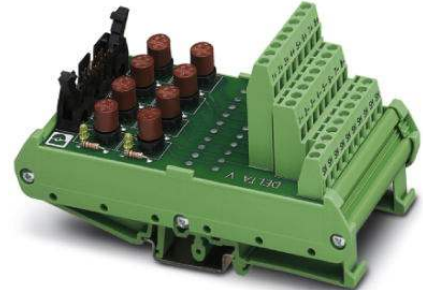



## UM-DELTA V/D/SI/BFI

Order No.: 5603253

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=5603253>

VARIOFACE interface module with fuse and fuse failure display

### Commercial data

GTIN (EAN)	 4 017918 923082
Note	Made-to-order
sales group	I630
Pack	1 pcs.
Customs tariff	85369010

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Nominal voltage $U_N$	24 V DC
Max. current carrying capacity per branch	50 mA (in as-supplied state, with one 50 mAF fuse, max. 1 A permitted)
Number of positions	16
Width	61 mm
Height	126 mm
Depth	71 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any

Standards/regulations	IEC 60664
	IEC 60664 A
	DIN VDE 0110
	DIN VDE 0160 (in parts)

#### Connection data

Connection 1	PCB connection
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm
Connection 2	Flat-ribbon cable connection
Type of connection	Pluggable

#### Certificates / Approvals



Certification

CUL, UL

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;