


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	ECO-07-029740	20DEC2007	RB	MM

- 1 INSULATOR: THERMOPLASTIC POLYESTER, UL RATED 94V-0; COLOR-BLACK
- 2 CONTACT: TAPERED ENTRY BeCu, GOLD PLATE OF 20μ" MIN. OVER NICKEL PLATE OF 30μ" MIN.
- 3 SLEEVE: BRASS PLATE OF 180μ" MIN. OVER NICKEL PLATE OF 50μ" MIN.
- 4 DISTANCE FROM POLARIZATION END OF SOCKET TO CENTER OF FIRST HOLE IS TYPICALLY .150, EXCEPT FOR 20 POSITION SOCKET IS .250

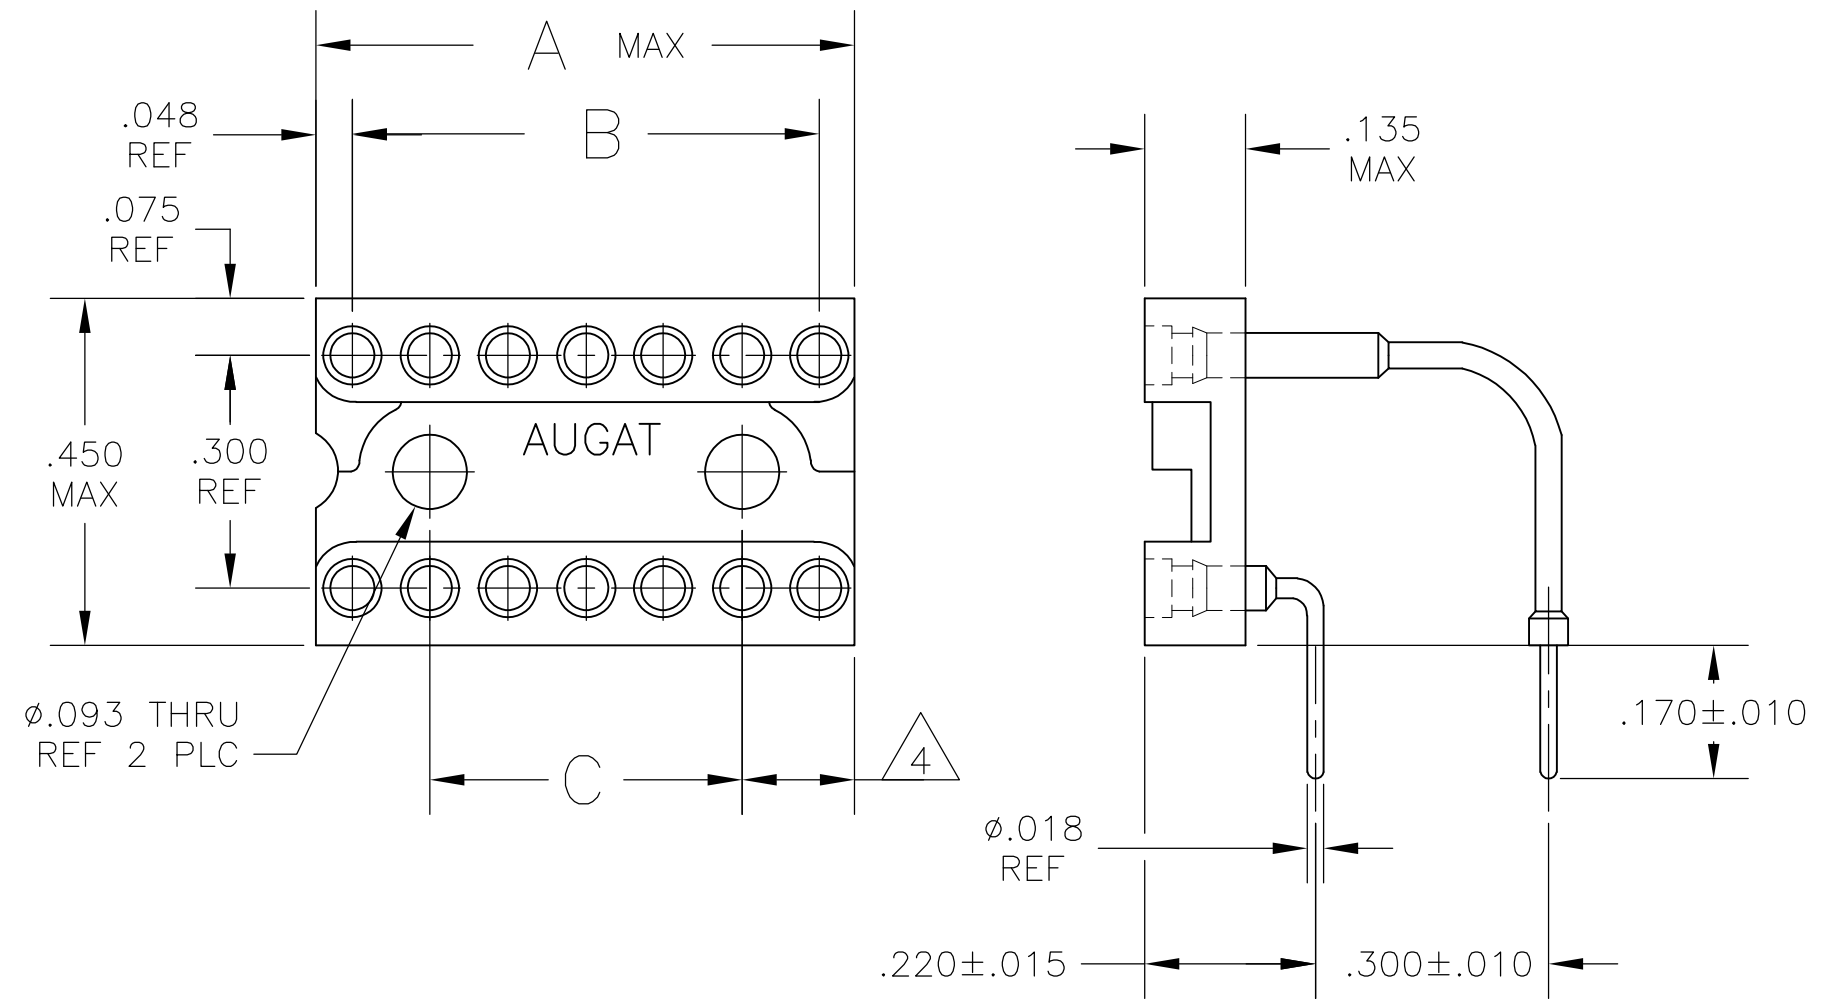

0.500	0.900	1.000	20	1977291-1
C REF	B	A MAX	POS.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 20DEC2007	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK M MILLER 20DEC2007		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M MILLER 20DEC2007	NAME	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC	RIGHT ANGLE DIP	
MATERIAL SEE NOTES		FINISH SEE NOTES	APPLICATION SPEC	RESTRICTED TO
		WEIGHT -	SIZE A3	CAGE CODE 00779
		CUSTOMER DRAWING	DRAWING NO C-1977291	SCALE 4:1
			SHEET 1 OF 1	REV A