

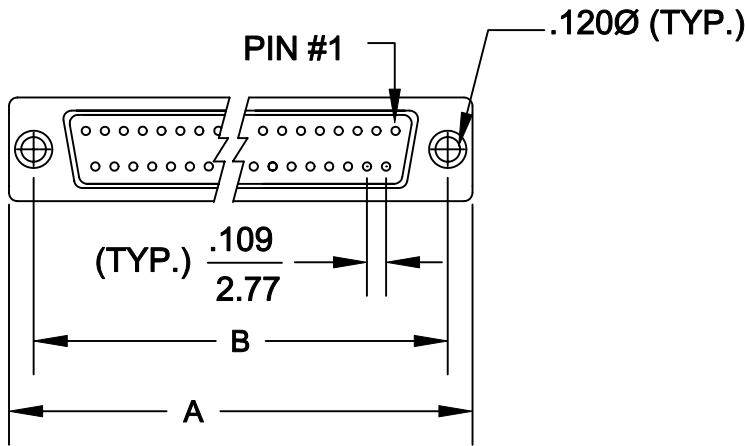


**DESCRIPTION: PLASTIC FLAT RIBBON CONNECTOR**

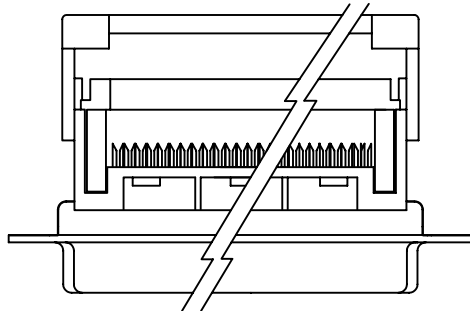

	A	B	C
9	1.213	.984	.843
	30.81	25.00	21.40
15	1.541	1.312	.843
	39.14	33.33	21.40
25	2.088	1.852	.843
	53.04	47.04	21.40
37	2.729	2.500	.843
	69.32	63.50	21.40

186-XXX-292LXX1

SERIES \_\_\_\_\_  
 POSITIONS \_\_\_\_\_  
 009 \_\_\_\_\_  
 015 \_\_\_\_\_  
 025 \_\_\_\_\_  
 037 \_\_\_\_\_  
 050 \_\_\_\_\_  
 GENDER \_\_\_\_\_  
 1 = MALE  
 2 = FEMALE  
 TERMINATION \_\_\_\_\_  
 9 = IDC  
 SHELL PLATING \_\_\_\_\_  
 2 = TIN  
 HARDWARE OPTIONS \_\_\_\_\_  
 00 = NO HARDWARE  
 55 = 4-40 INSERTS  
 PLATING OPTIONS \_\_\_\_\_  
 01 = GOLD FLASH

**SPECIFICATIONS:**

**MATERIALS:**

INSULATOR: UL 94V-0 RATED PBT  
 +30% FIBER-GLASS OR NYLON-66  
 SHELL: TIN PLATED  
 CONTACTS: PHOSPHOR BRONZE  
 RoHS COMPLIANT

**ELECTRICALS:**

CURRENT RATING: 1 AMP  
 CONTACT RESISTANCE: 15 mOHMS MAX  
 INSULTOR RESISTANCE: 1000 MOHMS MIN  
 VOLTAGE: 500V AC FOR 1 MINUTE  
 TEMPERATURE: -55°C TO +100°C

**FOR USE WITH 26/28 AWG STRANDED .050 CENTER FLAT CABLE**

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 9-16-05
	<h1>NorComp</h1>			CHECKED:
SCALE: 1:1				SHEET 1 OF 1
			DWG NO. 186-XXX-292LXX1	