


CTHF2422F Series

From 2.4mH to 68mH

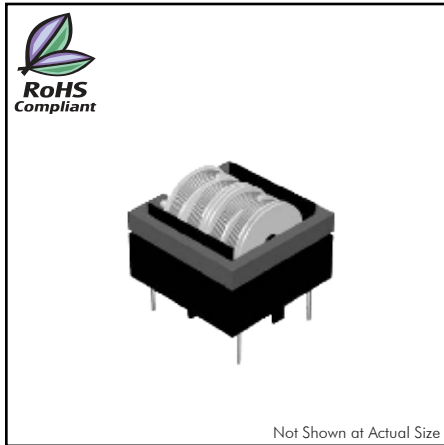

CHARACTERISTICS

- Description:** Common mode choke coils
- Applications:** For AC power supply/compact, separable bobbin
- Rated Voltage:** 250Vac
- Operating Temperature Range:** -20°C to +105°C including self temperature rise
- Temperature Rise:** 45°C maximum each line
- Dielectric Withstanding Voltage:** 2000Vac between each winding for 1 minute
- Additional Information:** Additional electrical & physical information available upon request. Different inductance and current products are available as well
- Miscellaneous:** **RoHS Compliant**
- Samples available. See website for ordering information.**

SPECIFICATIONS

*Indicates the inductance difference between the coil L1 and L2.

Part Number	Inductance (Min.) (mH)	Inductance Difference* (µH Max.)	DCR Max. (Ω)	Rated Iac Current (Max.) (A)
CTHF2422F-683M0R4	68	700	2.30	0.4
CTHF2422F-453M0R5	45	600	1.65	0.5
CTHF2422F-333M0R6	33	500	1.20	0.6
CTHF2422F-253M0R8	25	400	0.88	0.8
CTHF2422F-203M1R0	20	350	0.64	1.0
CTHF2422F-103M1R2	10	250	0.38	1.2
CTHF2422F-452M1R5	4.5	150	0.19	1.5
CTHF2422F-392M1R8	3.9	150	0.15	1.8
CTHF2422F-332M2R0	3.3	100	0.11	2.0
CTHF2422F-242M2R5	2.4	90	0.09	2.5

PHYSICAL DIMENSIONS

