

**Ratings**

Voltage: 600 V  
 Temperature: -40~105 °C  
 Flammability: FT2

**Conductor**

Conductor count: 10  
 Gauge: 18 AWG 0.82 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size:  $\phi 0.16 \times 41$   
 Resistance at 20 °C: 23.2  $\Omega$  /km max

**Insulator**

Material: mPPE  
 Color: red, black, white, yellow, blue, green, orange, purple, gray, brown  
 Diameter:  $\phi 1.8 \pm 0.10$  mm  
 Average thickness: 0.29 mm  
 Resistance at 20 °C: 100 M $\Omega$  /km min

**Wrap**

Material: cotton paper



**Outer jacket**

Material: mPPE, 85A  
 Color: black  
 Diameter:  $\phi 9.3 \pm 0.30$  mm  
 Average thickness: 1.0 mm

**Wire marking:** E339579 UL AWM STYLE 21509 18 AWG 105°C 600V --- cUL AWM I A 105°C 600V FT2 TENSILITY

**Bend radius**

Minimum: 6 times diameter (55.8 mm)

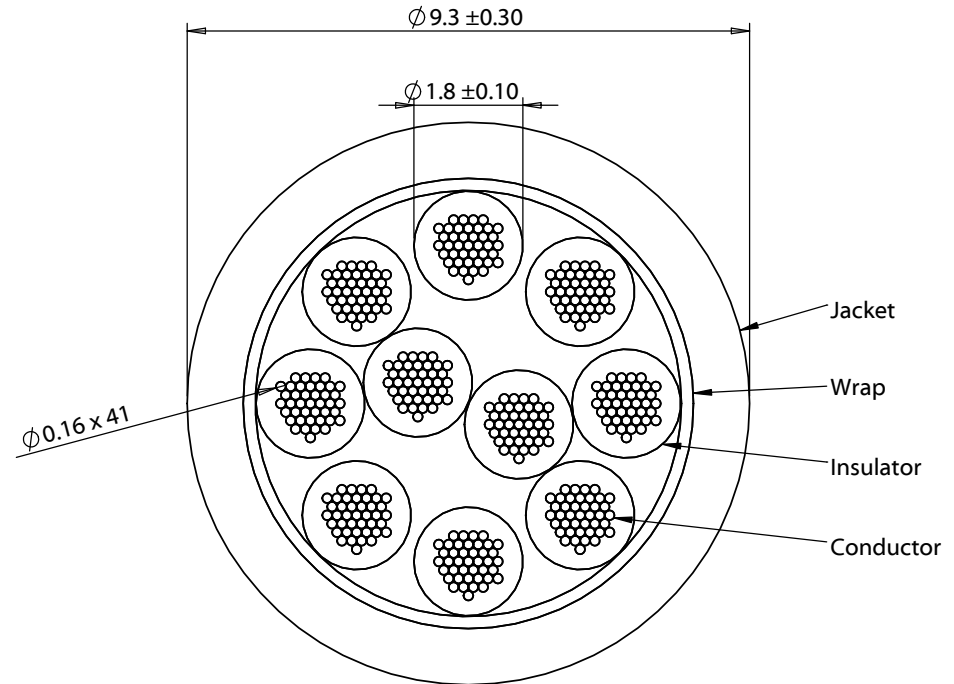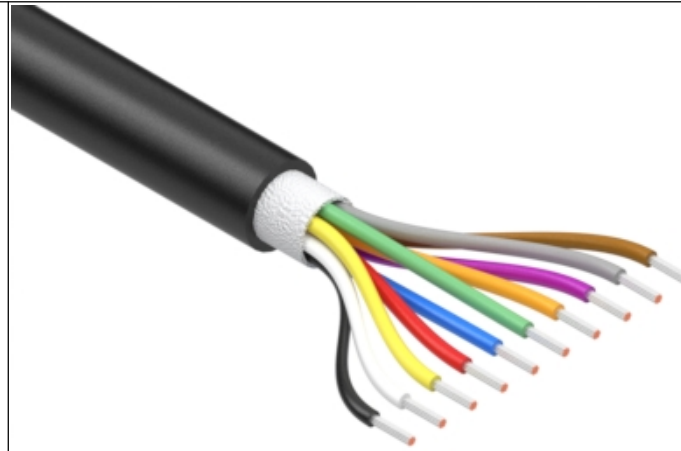

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118                  fax 1.541.323.4202 web tensility.com</p>
A	5/4/2021	Initial release	AW <small>Digitally signed by AW                  Date: 2021.05.19                  11:22:26 -07'00'</small>		
			Verified:	Phthalate and halogen free	Size:
			JC <small>Digitally signed by JC                  Date: 2021.05.19                  12:30:08 -07'00'</small>	Description:	Part number:
			Dimensions are in millimeters. Tolerances: X: $\pm 0.5$ mm X.X: $\pm 0.3$ mm X.XX: $\pm 0.05$ mm	Wire, 10C TS, 18 AWG, 21509, 600V, 105C, 9.3 mm, FT2, mPPE	A
					Scale: 8:1
					Sheet 1 of 1

5

4

3

2

1