

MINIMUM INSERTION LOSS - 500 CIRCUIT			
COMMON MODE		DIFFERENTIAL MODE	
MHz	min. I. L. (dB)	MHz	min. I. L. (dB)
.02	--	.02	--
.05	3	.05	--
.10	7	.10	3
.15	11	.15	6
0.5	20	0.5	14
1.0	22	1.0	20
5.0	24	5.0	35
10	22	10	35
30	18	30	35



TEST SPECIFICATIONS

HI-POT (1 min.)
 U/G 1500 VAC
 L/L 1450 VDC

Rated Voltage: 250 VAC max.
 Rated Current: at 250 VAC 6A max.
 Line Frequency: 50/60 Hz
 Turn On Delay: 6A - 9000 seconds min.
 Inrush Current: at 250 VAC, 50Hz 5 uA max.
 Leakage Current: at 250 VAC, 50Hz 5 uA max.

ENVIRONMENTAL SPECIFICATIONS

Ambient Temperature Range: 0°C to 40°C
 (Operating at Rated Current)
 Humidity Range: 0% to 95% RH
 Approvals: UL, CSA, TUV
 Component shall bear the CE Mark.
 RoHS Compliant

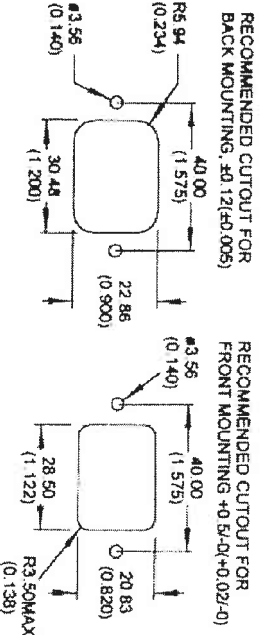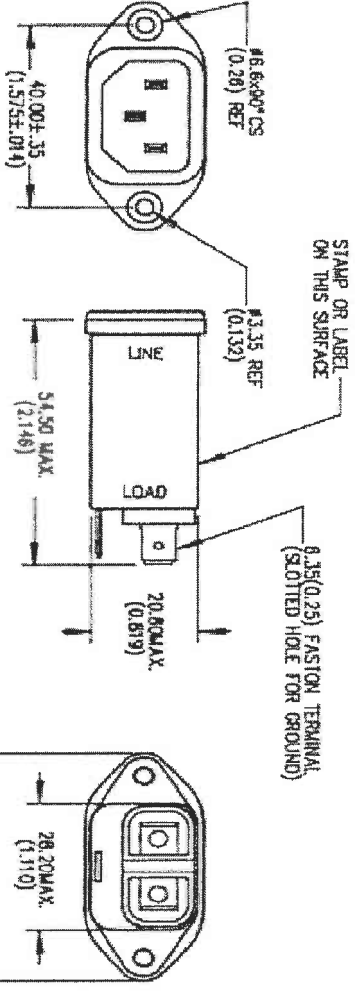

METRIC

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN mm.
 TOLERANCES ARE:
 ∠ TOL = 0° 30'
 X TOL = ±.25
 XX TOL = ±.13

CONFIDENTIAL-PROPRIETARY TO CURTIS INDUSTRIES		NOT TO BE SHARED WITH THIRD PARTY WITHOUT WRITTEN PERMISSION FROM CURTIS INDUSTRIES	
CAD FILENAME:	F3199CA06 RevA B.slddrw	SCALE	NONE
FOR TOLERANCE AND CHANGED INFORMATION	SEE SHEET 1	SIZE	SHT 3
		DWG.	NO
		DATE	05/31/11
		REV	A
		F3199CA06	