

# Bussmann series STD Offset bolted tags



## Product description

Eaton's Bussmann series STD fuse links are specifically designed for street lighting applications with Q1 fusing purpose.

## Standard features

- Good peak let-through current limitation
- 1:1:6 Selective coordination ratio between "minor" and "major" fuse
- gG characteristics for cable protection and general purpose applications
- Power loss values well within the limits of IEC 60269

**Catalogue symbol:**

- STD(Amps)

**Technical data:**

- Rated voltage: 240 V a.c.
- Rated current: 2 to 32 A
- Breaking capacity: 33 kA
- Class of operation: gG

**Standards/approvals:**

- BS88 part 1 and 2
- IEC 60269 part 1
- RoHS compliant


**Packaging:**

- MOQ 20

**Table 1. Technical data**


Part number	Rated voltage	Rated current (Amps)	Energy integrals I <sup>2</sup> t (A <sup>2</sup> S)		Watts loss
			Pre-arcing	Total at 415V	W
STD2	240 V a.c.	2	0.8	1	0.5
STD4	240 V a.c.	4	5.5	8	1
STD6	240 V a.c.	6	15	22	1.6
STD10	240 V a.c.	10	28	42	1.2
STD16	240 V a.c.	16	160	250	1.5
STD20	240 V a.c.	20	290	450	1.7
STD25	240 V a.c.	25	800	1300	1.8
STD32	240 V a.c.	32	1600	2500	2.4

**Dimensions - mm**

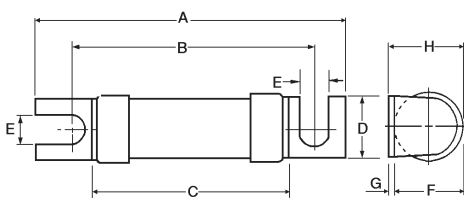

Catalogue numbers	A	B	C	D	E	F	G	H
STD	47	35	24	11	4.7	12	0.8	13

**Time current curve**

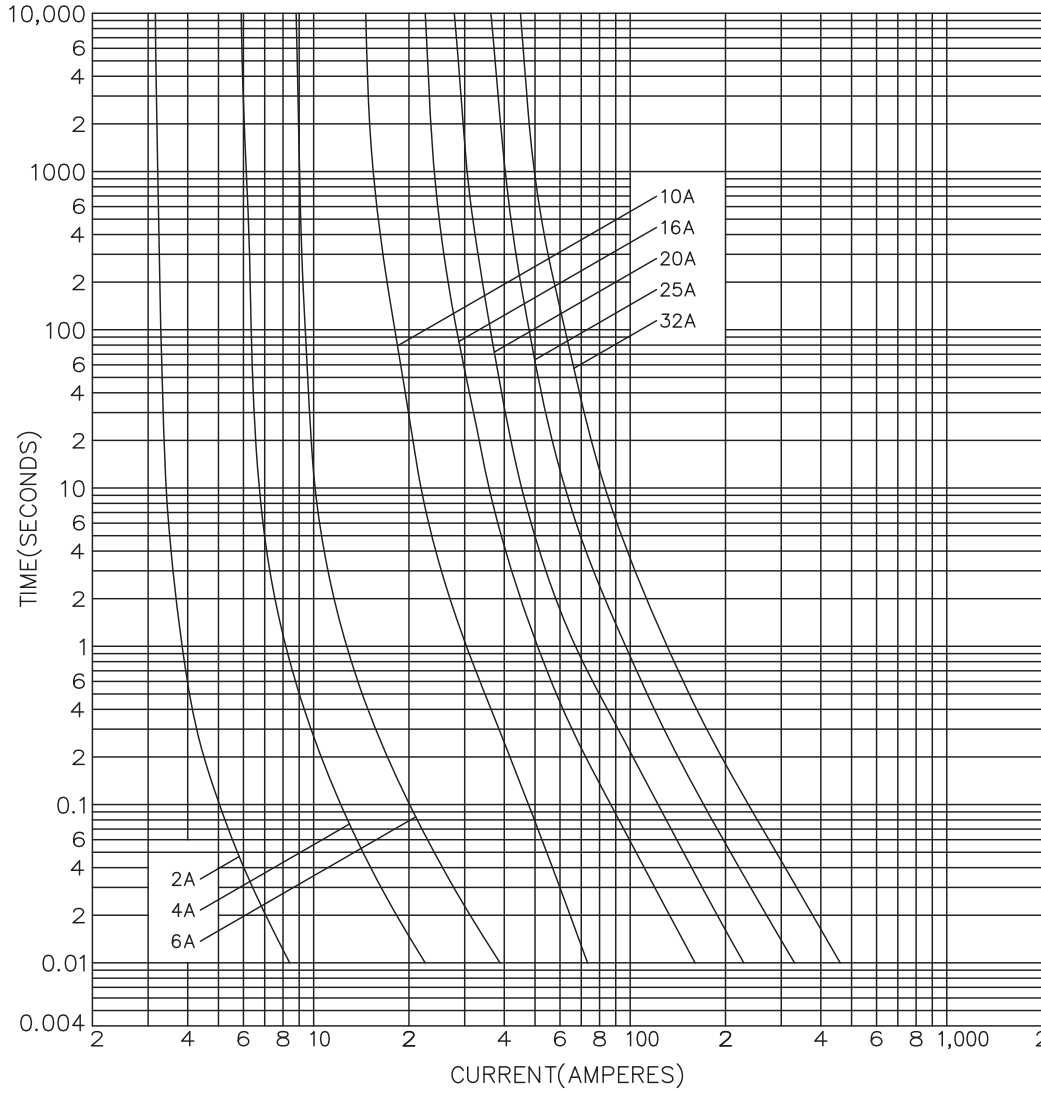

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

**Eaton**  
 EMEA Headquarters  
 Route de la Longeraie 7  
 1110 Morges, Switzerland  
 Eaton.eu

© 2015 Eaton  
 All Rights Reserved  
 Publication No. 4123  
 July 2015