

J3 Type B Right Angle Female for Daughter Cards



Series 8071







- 95 signal contacts in a 5 x 19 configuration
- Designed for gas tight press-fit installation
- Supplied with or without an upper ground return shield
- Daughter card applications
- This connector should be used in conjunction with a Type A or AB style to ensure proper mating alignment
- This connector fills position J3 of the CompactPCI® specification
- This connector also fills position P0 of the VME64 extension specification
- Lower ground return shield available (see page 30)

27 8071 095 000 833 = Type B 19 95 Pin Right Angle Female without upper shield

27 8071 095 010 833 = Type B 19 95 Pin Right Angle Female with upper shield

Plating Code	Contact Area	Press-fit Area	Under Coat
833	0.1µm min. Au.65µm Pd/Ni	1.5-3.0µm Solder	Nickel 1.2-3.0µm

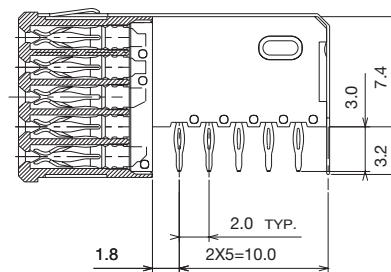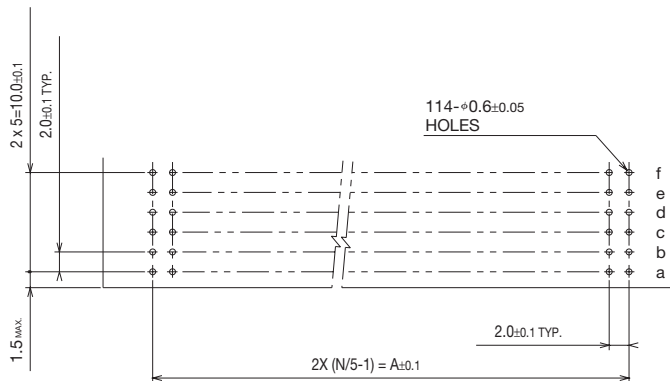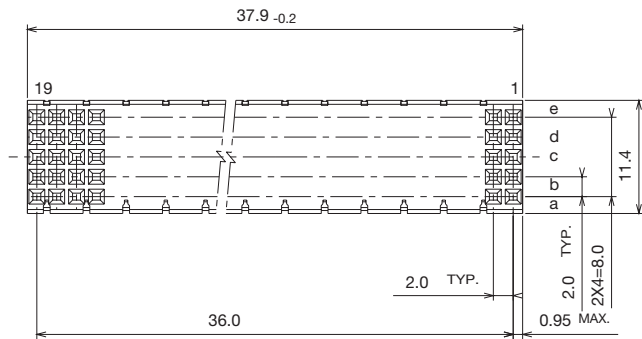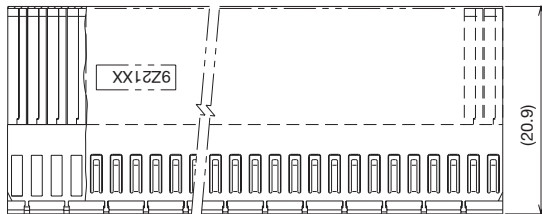

RECOMMENDED P.C. BOARD LAYOUT
(COMPONENT SIDE)