

Ŧ	D	г п	m		0
				_	



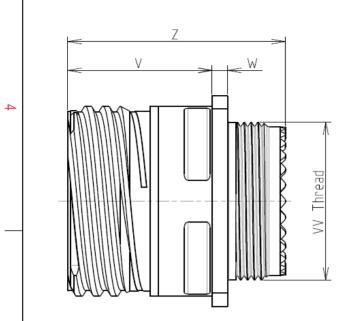

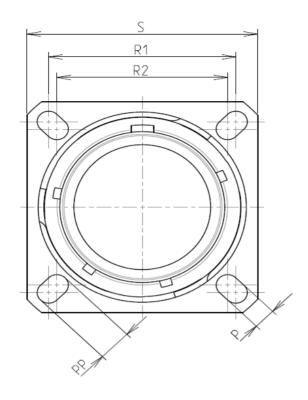

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Composite			
	-Shell Plating	: Without Plating			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
	-Durability	: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	-65℃ to +175℃			
	-Salt Spray	: 2000 hours			

: 11.7 g ± 10%

8D 0

G

11

Х

01

S

F

Ν

L

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			


Delivered W/O Contacts


CONTACT LAYOUT : 11-01

CONTACT TYPE : SOCKET(500 Matings)

Е

ORIENTATION : N



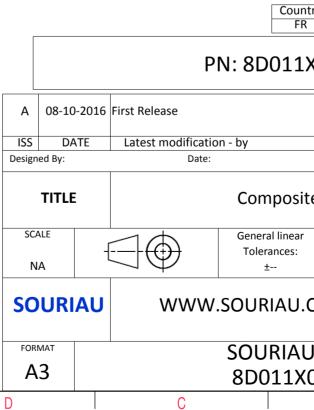

	σ			A		
		•				4
S EXA	AMPLE					3
whic er of t	non-conformit h does not co he Parties or t n, technical n Jurisd	mply wit by a thiro otice.)	th d party Control L	ist		2
1X0	1SNL					
		CUST	OMER DR	AWING	MOD	• N°
ite	te Receptacle 8D series					
ar	NPRDS / PROJECT 859 1					
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° LSNL-C				SHE 1/2	
	В			А		

		G	г П	m		0
		Contact Layout				Panel Cutout
4		01			Â	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		1#12	1		₩ 22	
ယ	Ctc A	11-01 X Y 0 0				Dim ØA ØAA R1
						ØT SOURIAU shall not be liable for any
22						due to a use of the Products whi the Specifications issued by either of (professional recommendati Country FR
					A 08-10-20 ISS DATE	PN: 8D011X
					Designed By: TITLE SCALE	Date: Composite General linear
4					NA SOURIAU	
					FORMAT A3	SOURIAU 8D011X0
	Н	G	F	E	D	C

