

6

5

4

3


2

1




APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-	12124	RELEASED	4/24/12	
A	12124	REDRAWN	7/20/16	AY/SY

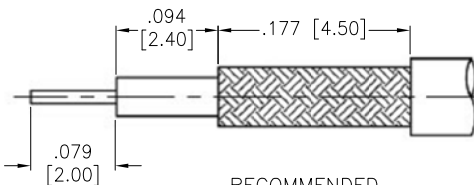

RECOMMENDED CABLE STRIPPING DIM'S

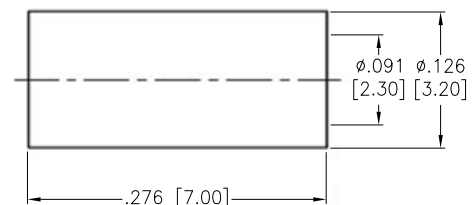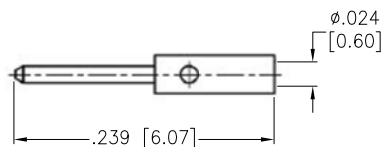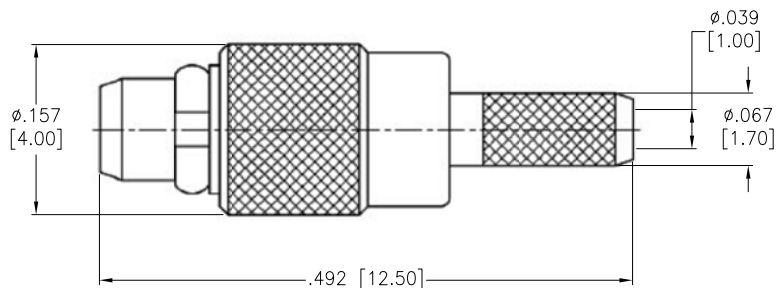

FERRULE	BRASS	GOLD
CONTACT PIN	BRASS	GOLD 3u"
RING	BE CU	GOLD
BODY	BRASS	GOLD
INSULATOR	PTFE	WHITE
BARREL	BRASS	GOLD
DESCRIPTION	MATERIAL	FINISH

**SPECIFICATIONS:**

**Electrical:**

Frequency Range: DC-6 GHz  
 Normal Impedance: 50 ohm  
 Operating voltage: 170 Volts max.  
 Proof voltage: 500 Volts

**Temperature Rating:**

Operating temperature: -55°C to +155°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM [INCHES]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

# ADAM TECH

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-0214

TITLE  
**RF CONNECTOR, TYPE MMCX, MALE CRIMP  
 FOR RG178/U, 50 OHM**

APPROVALS		DATE
DRAWN	AY	4/24/12
CHECKED	NP	4/24/12
APPROVED		

SIZE <b>X</b>	PART NO. <b>RF12-06-T-21-50-G</b>	REV. <b>A</b>
REF: S00277T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1