
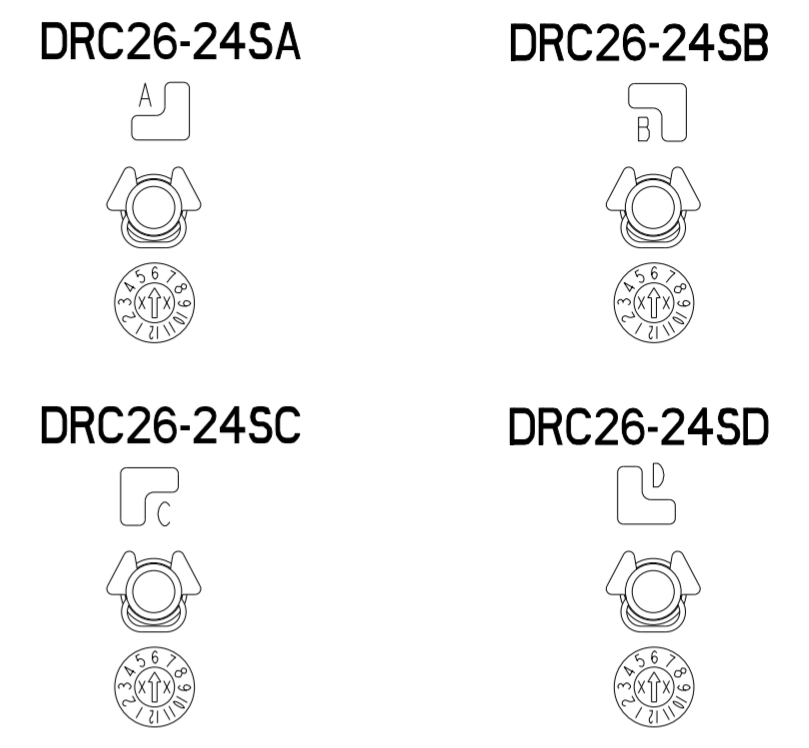


P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER PCN-21-118564	09FEB2022	DRK	IG

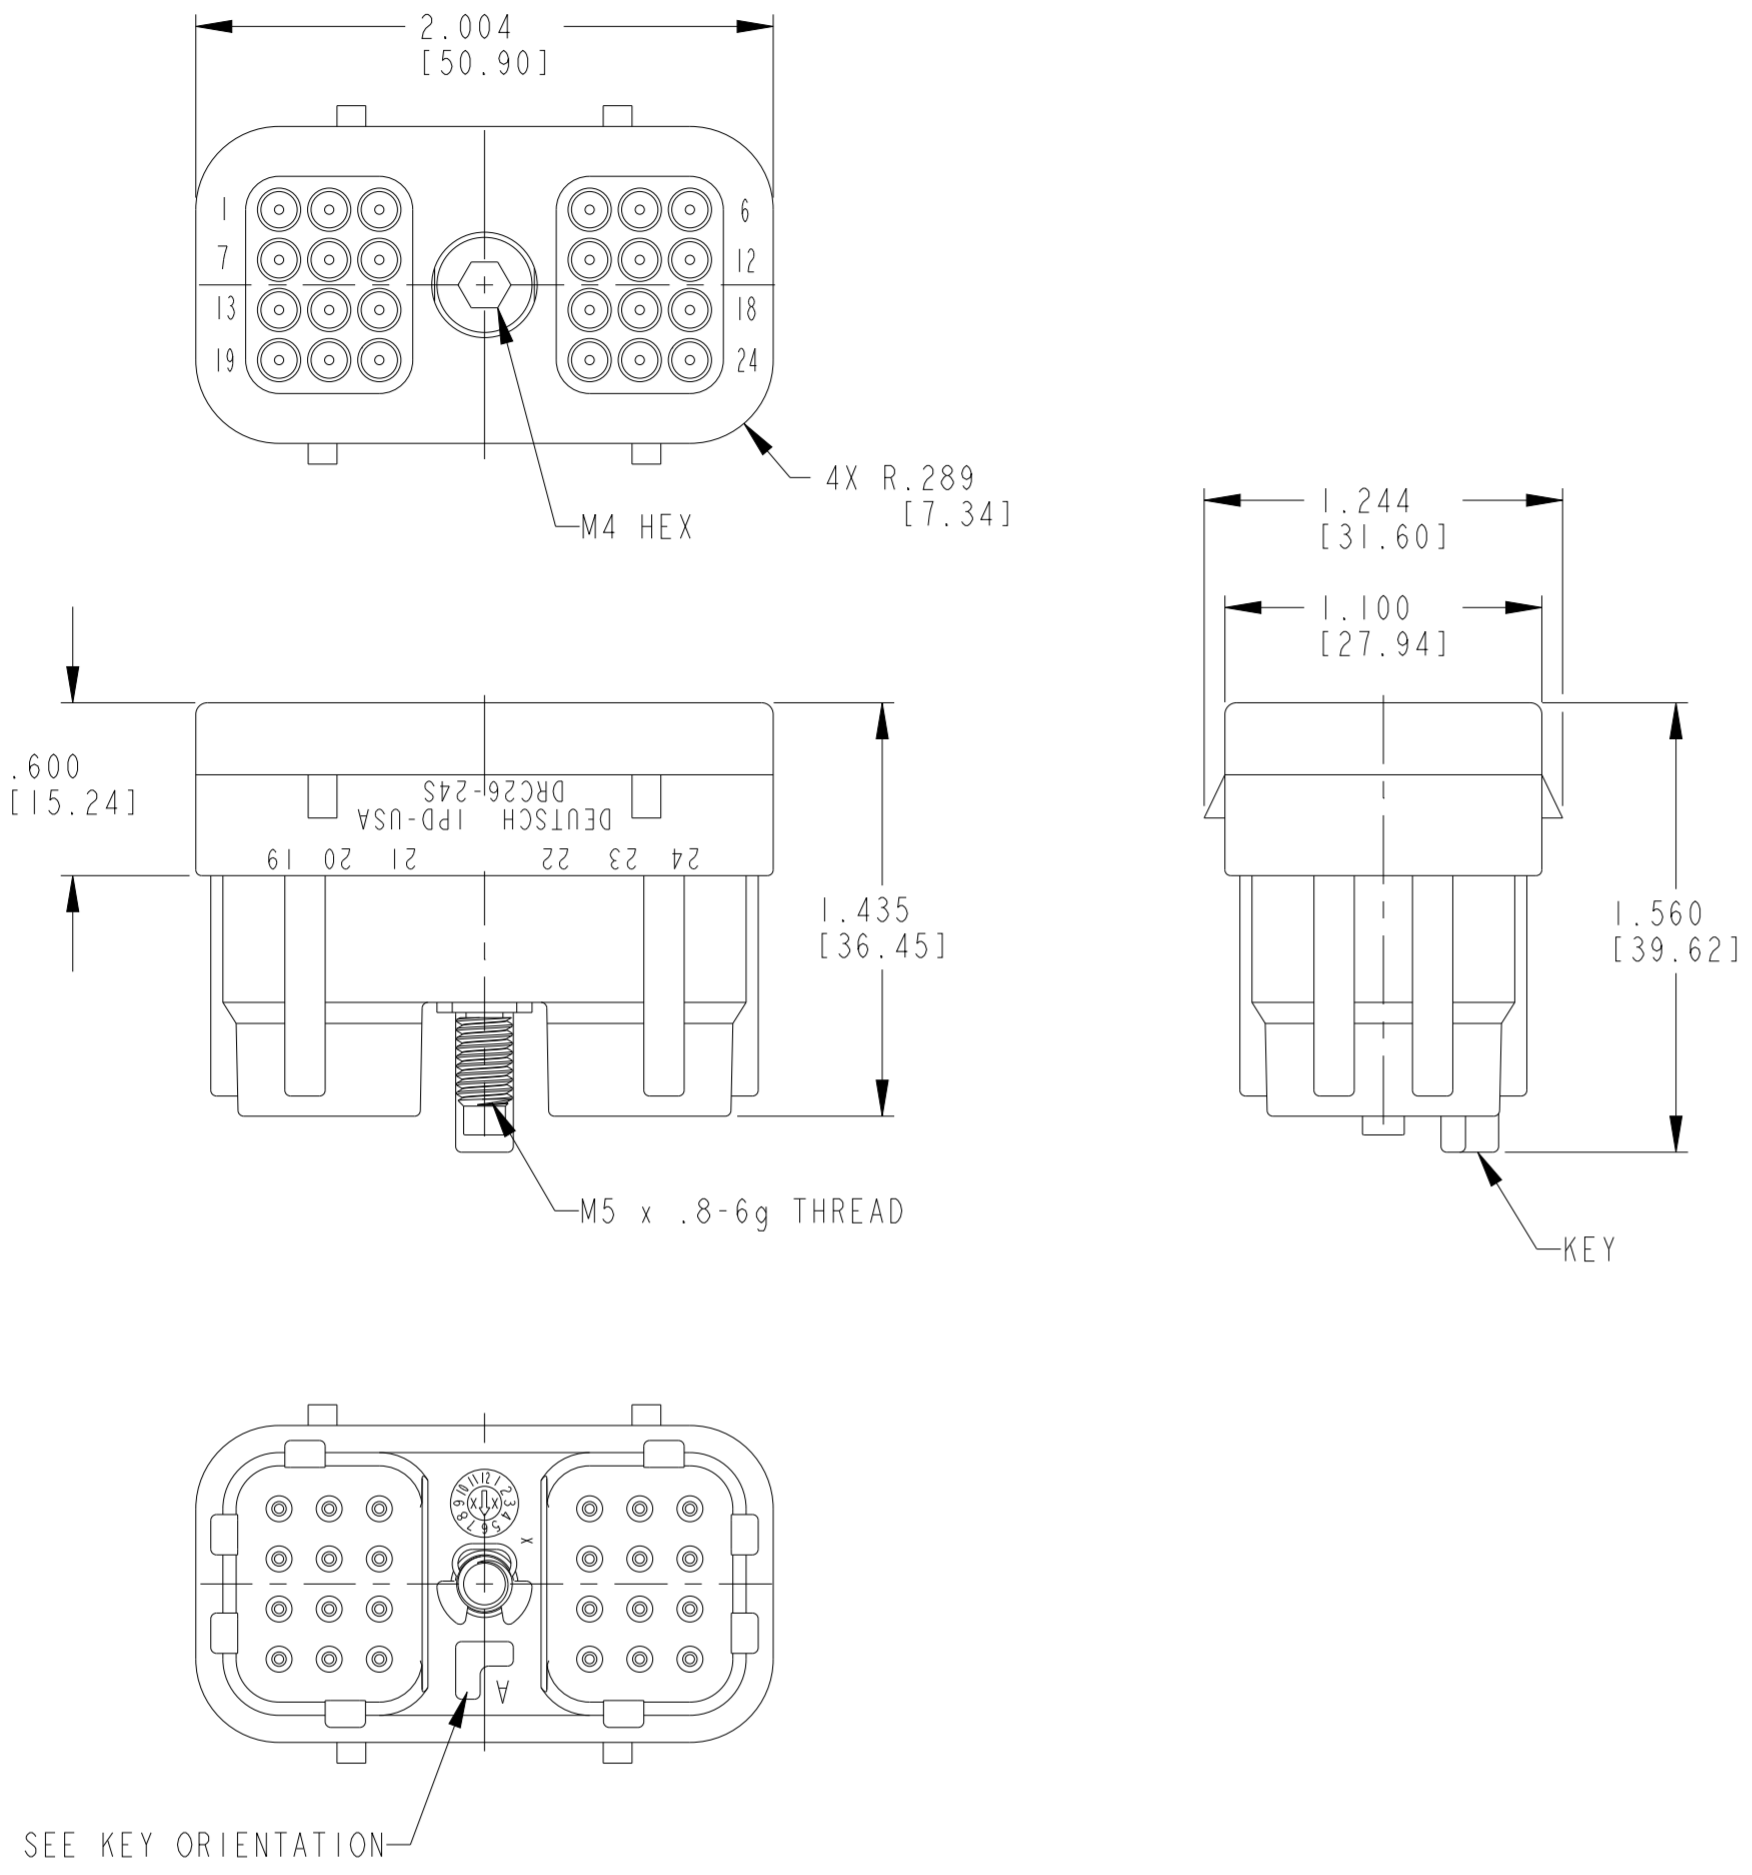

KEY ORIENTATION

TCPN	ALIAS PART NUMBER
DRC26-24SA	DRC26-24SA
DRC26-24SB	DRC26-24SB
DRC26-24SC	DRC26-24SC
DRC26-24SD	DRC26-24SD

- 5. MATERIAL: HOUSING: PA46 30% GF (BLACK); BOLT: STEEL, TRIVALENT ZINC PLATED (ROHS COMPLIANT); CLIP: STEEL; GROMMET: VMO
- 4. THIS PLUG MATES WITH DRC23-24P*-**** RECEPTACLE. (* = A,B,C,D KEYS; **** = ALL MODIFICATIONS)
- 3. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000.
- 2. RECOMMENDED RETAINING BOLT TORQUE: 25-28 IN-LB [2.82-3.16 NM].
- 1. PLUG IS SUPPLIED WITH DUST CAP (NOT SHOWN).

NOTES: UNLESS OTHERWISE SPECIFIED

CONTACT SIZE	MIN. INSUL. O.D.	MAX. INSUL. O.D.	WIRE GAUGE RANGE REF ONLY
20	.040 [1.016]	.095 [2.413]	16 - 20 [1.00-.50mm ²]

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	D MEYER	29NOV2000	TE Connectivity	
CHK	B BYFORD	20SEP2004		
APVD	R REED	20SEP2004		
PRODUCT SPEC	108-151052			
APPLICATION SPEC	-		NAME	PLUG 24 CONTACTS, SIZE 20 DRC SERIES
MATERIAL	5		SIZE	A2
			CAGE CODE	00779
			DRAWING NO	C-DRC26-24SX
			RESTRICTED TO	-
			CUSTOMER DRAWING	SCALE 3:2 SHEET 1 OF 1 REV D