

AMP | Timer Connector System

TE Internal #: 1-962340-1 Housing for Male Terminals, Wire-to-Wire, 4 Position, .197 in [5 mm] Centerline, Black, Wire & Cable, Signal, Timer Connector System

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > Timer Connector Housing



Connector & Housing Type: Housing for Male Terminals

Mating Tab Width: 2.8 mm [.11 in]

Connector System: Wire-to-Wire

Number of Positions: 4

Centerline (Pitch): 5 mm [.197 in]

All Timer Connector Housing (589)

Features

Product Type Features

Connector Shape

Connector & Housing Type

Rectangular

Housing for Male Terminals

Connector System	Wire-to-Wire			
Sealable	No			
Hybrid Connector	No			
Primary Locking Feature	Integrated in Housing			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Number of Positions	4			
Number of Rows	1			
Electrical Characteristics				
Nominal Voltage Architecture	16 V			
Body Features				
Primary Product Color	Black			
Connector & Keying Code	A1			
Contact Features				

C For support call+1 800 522 6752

08/13/2023 09:30PM | Page 1

Housing for Male Terminals, Wire-to-Wire, 4 Position, .197 in [5 mm] Centerline, Black, Wire & Cable, Signal, Timer Connector System



Contact Size	2.8mm	
Contact Type	Tab	
Mating Tab Width	2.8 mm[.11 in]	
Contact Current Rating (Max)	10 A	
Mechanical Attachment		
Terminal Position Assurance	No	
Strain Relief	Without	
Mating Alignment Type	Keyed	
Mating Alignment	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Housing Material	PBT GF30	
Centerline (Pitch)	5 mm[.197 in]	
Dimensions		
Connector Height	38 mm[1.496 in]	
Product Width	20.6 mm[.811 in]	
Product Length	27.3 mm[1.075 in]	

Usage Conditions

Operating Temperature (Max)	100 °C[212 °F]	
Operating Temperature Range	-40 – 100 °C[-40 – 212 °F]	
Operation/Application		
Circuit Application	Signal	
Packaging Features		
Packaging Method	Box	
Other		
Serviceable	No	
Connector Position Assurance Capable	No	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	

Housing for Male Terminals, Wire-to-Wire, 4 Position, .197 in [5 mm] Centerline, Black, Wire & Cable, Signal, Timer Connector System



China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Also in the Series | Timer Connector System

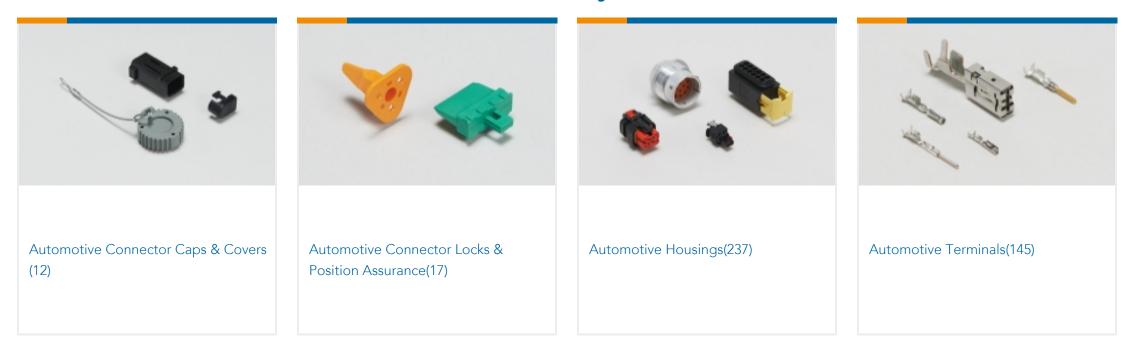

Housing for Male Terminals, Wire-to-Wire, 4 Position, .197 in [5 mm] Centerline, Black, Wire & Cable, Signal, Timer Connector System



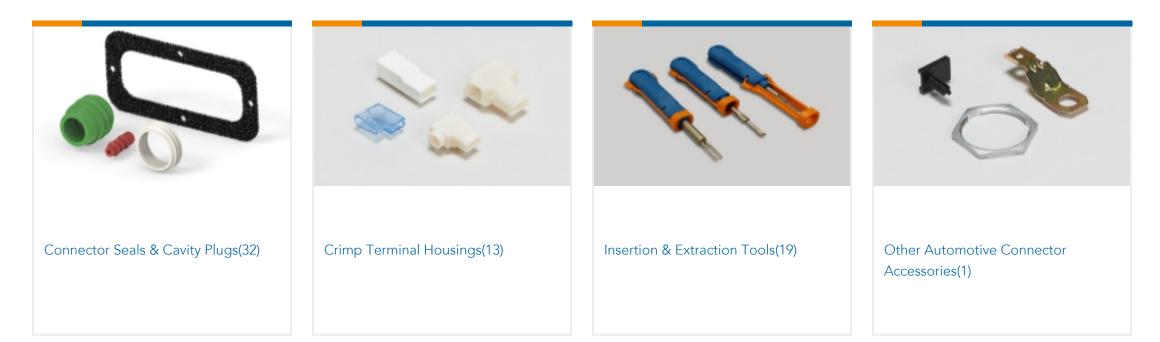

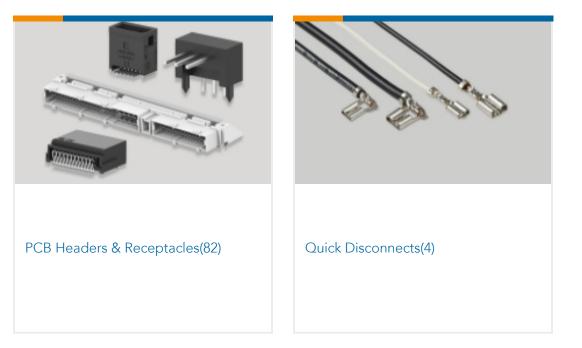

Customers Also Bought



TE Part #1-963214-1 Timer Connector Housing	TE Part #DT06-4S-CE05 PLG, 4P, BLK, E, SEAL RET, CAP	TE Part #207153-1 6 POS SQ GRID METRIMATE-RCPT	TE Part #794187-1 03P MINI UMNL2 CAP HSG UL94V0
TE Part #160336-2 RING TONGUE IS 12-10 0.295 X .650 TPBR	TE Part #1-962917-1 TAB 5.8x0.8 CONTACT CS SWS Sn	TE Part #208101-3 HDP LATCHING BLOCK	TE Part #374000-E STVR 96 MI ABC VVV 4-00 GA06 4,0 * 247 E

TE Part #87812-000 PS2021AB

Documents

Housing for Male Terminals, Wire-to-Wire, 4 Position, .197 in [5 mm] Centerline, Black, Wire & Cable, Signal, Timer Connector System



Product Drawings 4P FLACHSTCK GEH2,8

English

CAD Files

3D PDF

English

Customer View Model ENG_CVM_1-962340-1_H1.2d_dxf.zip

English

Customer View Model

ENG_CVM_1-962340-1_H1.3d_igs.zip

English

Customer View Model

ENG_CVM_1-962340-1_H1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Timer Interconnection System

English