

GW5BNF15L00 LED Module

Product Specification

June 2008

High-output 7-Watt LED Module (350 lm)
featuring High Color Rendering and
5000°K color temperature

SHARP

SPEC. No. DG-087007

ISSUE Jun-27-08

ELECTRONIC COMPONENTS AND DEVICES GROUP

SHARP CORPORATION

SPECIFICATION

DEVICE SPECIFICATION FOR
LIGHT EMITTING DIODE MODULE

MODEL No. **GW5BNF15L00**

Specified for

Reference

CUSTOMERS' APPROVAL

Date

By

PRESENTED

Date *June, 27, 2008*

By 

Y. Inada,
Department General Manager
A1249 Project Team
ELECTRONIC COMPONENTS
AND DEVICES GROUP
SHARP CORPORATION

※ This specification is reference.

PRODUCT NAME **Light Emitting Diode Module**
MODEL No. **GW5BNF15L00**

1. These specification sheets include materials protected under the copyright of Sharp Corporation ("Sharp"). Please do not reproduce or cause anyone to reproduce them without Sharp's consent.
2. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets, as well as the precautions mentioned below. Sharp assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets, and the precautions mentioned below.

(Precautions)

- (1) This products is designed for use in the following application areas;

* OA equipment * Audio visual equipment * Home appliance
* Telecommunication equipment (Terminal) * Measuring equipment
* Tooling machines * Computers

If the use of the product in the above application areas is for equipment listed in paragraphs (2) or (3), please be sure to observe the precautions given in those respective paragraphs.

- (2) Appropriate measures, such as fail-safe design and redundant design considering the safety design of the overall system and equipment, should be taken to ensure reliability and safety when this product is used for equipment which demands high reliability and safety in function and precision, such as ;

* Transportation control and safety equipment (aircraft, train, automobile etc.)
* Traffic signals * Gas leakage sensor breakers * Rescue and security equipment
* Other safety equipment

- (3) Please do not use this product for equipment which require extremely high reliability and safety in function and precision, such as ;

* Space equipment * Telecommunication equipment (for trunk lines)
* Nuclear power control equipment * Medical equipment

- (4) Please contact and consult with a Sharp sales representative if there are any questions regarding interpretation of the above three paragraphs.

3. Manufacturing method or materials of this product which does not influence on its specifications are subject to change without notice.
4. Please contact and consult with a Sharp sales representative for any questions about this product.

※ This specification is reference.

SHARP

GW5BNF15L00 Specification

1. Application

This specification applies to the light emitting diode module Model No. GW5BNF15L00

[White (from InGaN Blue LED chip + Phosphor) LED module]

Main use : Illumination

2. Outline dimensions and terminal connections ----- Refer to the attached sheet Page 3.

3. Ratings and characteristics ----- Refer to the attached sheet Page 4. ~ 6.

3-1. Absolute maximum ratings

3-2. Electro-optical characteristics

3-3. Derating Curve

3-4. Characteristics Diagram

4. Reliability ----- Refer to the attached sheet Page 7.

4-1. Test items and test conditions

4-2. Failure judgment criteria

5. Quality level ----- Refer to the attached sheet Page 8.

5-1. Inspection method

5-2. Description of inspection and criteria

6. Supplement----- Refer to the attached sheet Page 9. ~ 10.

6-1. Chromaticity coordinates

6-2. Packing

6-3. Label

6-4. Indication to the product


7. Precautions for use ----- Refer to the attached sheet Page 11. ~ 12.

※ This specification is reference.




2. Outline dimensions and terminal connections

(Outline dimension)

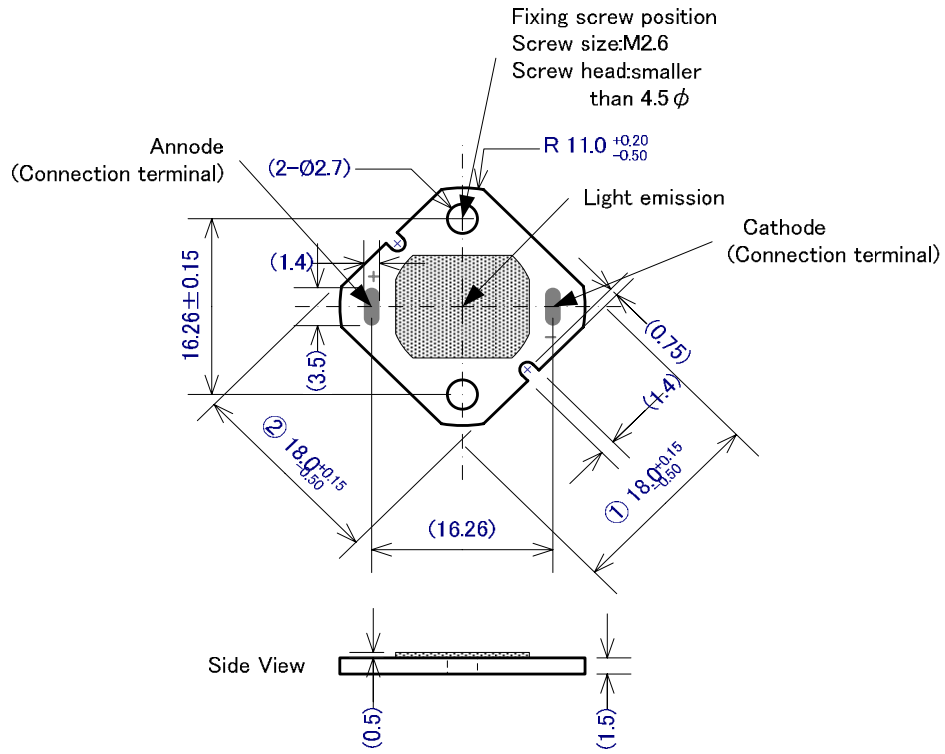

* () is reference.

(Internal circuit diagram)

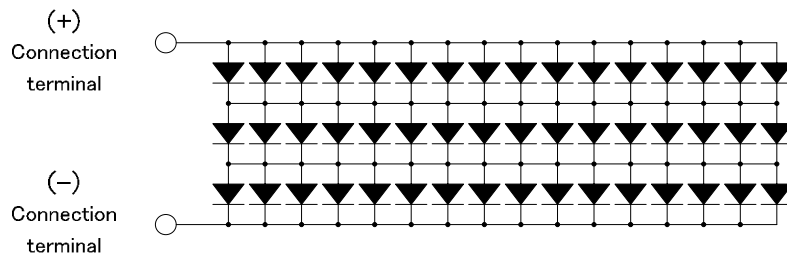

"3series × 16parallel=48 pcs of LED"
 (3 serially connected LED compose a block.16 blocks are parallelly connected)

※ This specification is reference.

unit	Material	Finish	Drawing No.
mm	Substrate: Alumina ceramic	Connection terminal: Au plating	52006022

SHARP

3. Ratings and characteristics

3-1. Absolute maximum ratings

Item	Symbol	Rating	Unit
Power dissipation *1	P	8.0	W
Forward current *1	I _F	700	mA
Reverse Voltage	V _R	-15	V
Operating temperature *2	T _{opr}	-30~+90	°C
Storage temperature	T _{stg}	-40~+100°C	°C

*1 Power dissipation and forward current are the value when the module temperature is set lower than the rating by using an adequate heat sink.

*2 Operating temperature is fixed to the temperature of module's external part.

(Not an ambient temperature)

The derating curve in the next page is applied to the operating current.

3-2. Electro-optical characteristics

T_c = 25 °C

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward voltage	V _F	IF=640mA	8.5	(10.2)	11.5	V
Luminous Flux *3	φ	IF=640mA	260	(350)	-	lm
Chromaticity *4	x	IF=640mA	-	0.345	-	
	y		-	0.351	-	
	T _c		(4700)	5000	(5300)	K

* () is reference.

(*3) Monitored by 8 inch integrating sphere of Sharp Standards.

(After 20 ms drive) (Tolerance: ±15%)

(*4) Monitored by 8 inch integrating sphere of Sharp Standards


Measured by Otsuka electronics MODEL LE-3400

(After 20 ms drive) (Tolerance: x, y: ±0.02)

※ This specification is reference.




3-3. Derating Curve

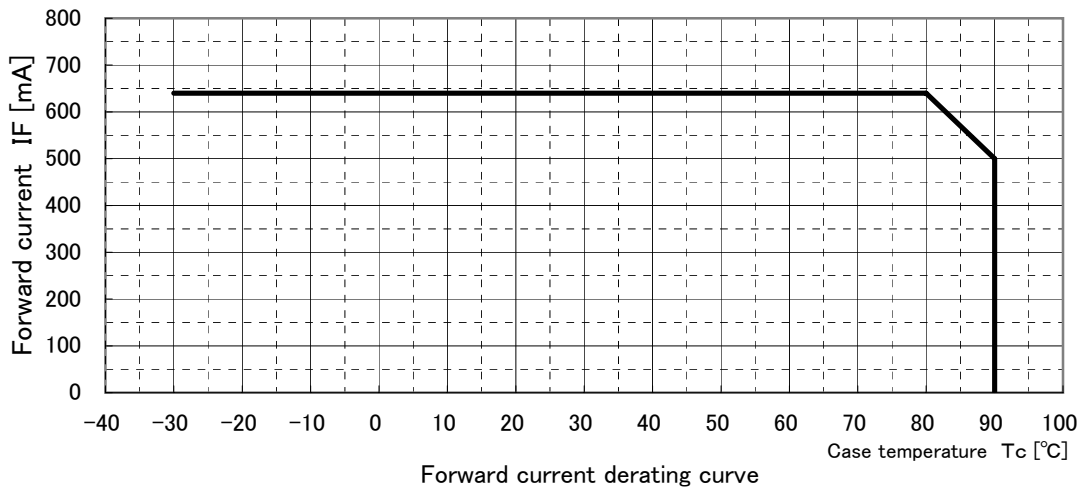


*To keep case temperature lower than the rating, enough heat-radiation performance needs to be secured by using an adequate heat sink.
To secure long-term life, use it by the current equal to or less than 640mA.


(Measuring point for case temperature)

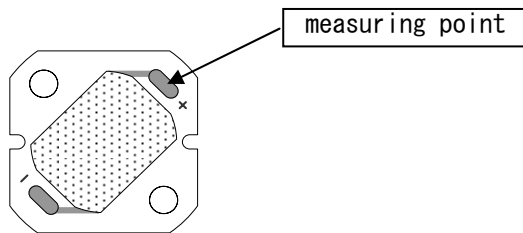

(Example of heat sink attachment)

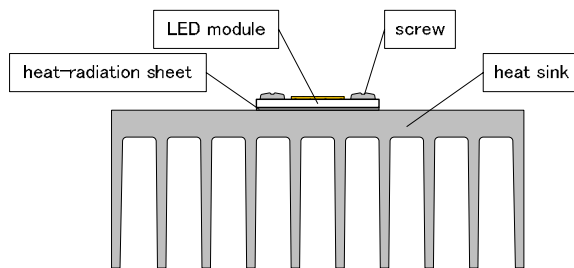

(Thermal resistance)



① Thermal resistance: 4.5°C/W <Reference value>

(Junction-Case)







② Thermal resistance : Depends on performance of attached heat sink.
(Case-Atmosphere)

※ This specification is reference.



3-4. Characteristics Diagram

3-4-① High color rendering "BN"type. (*1)

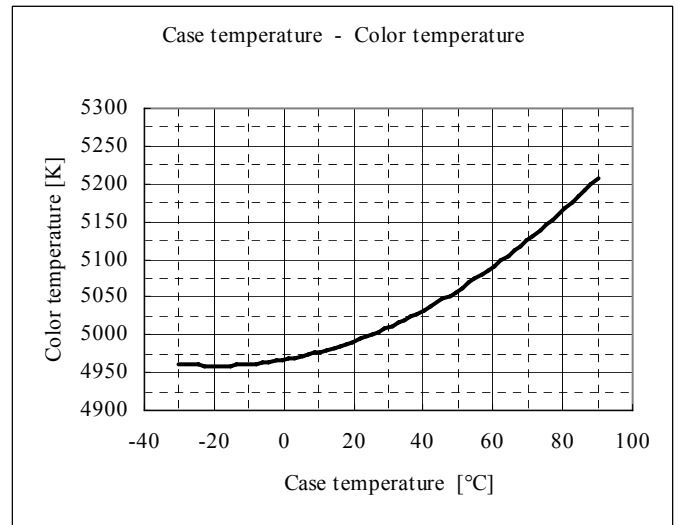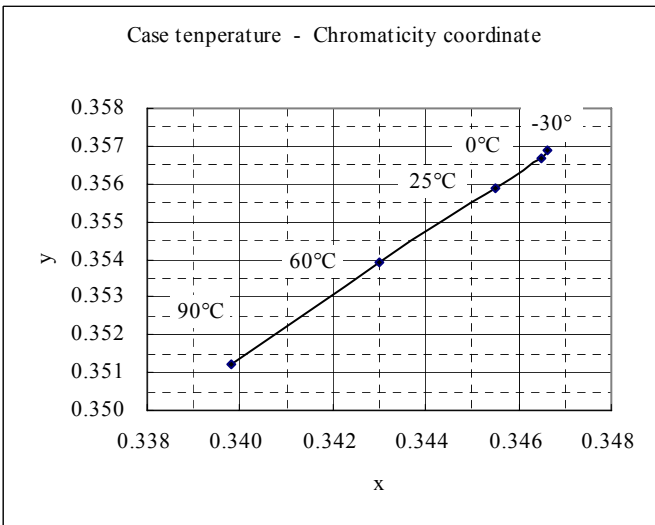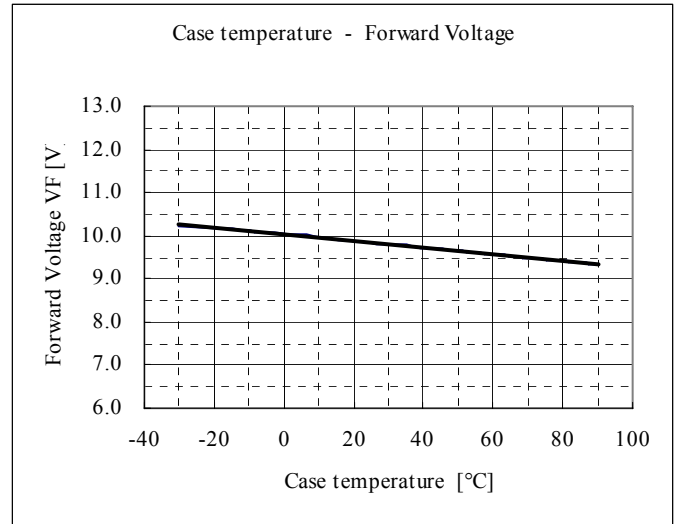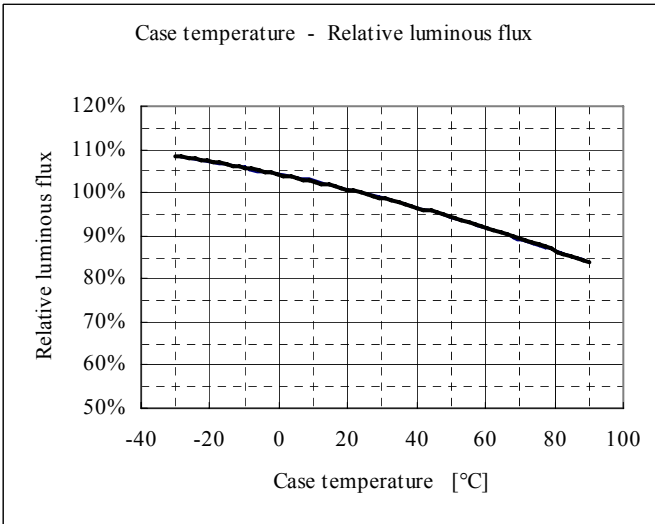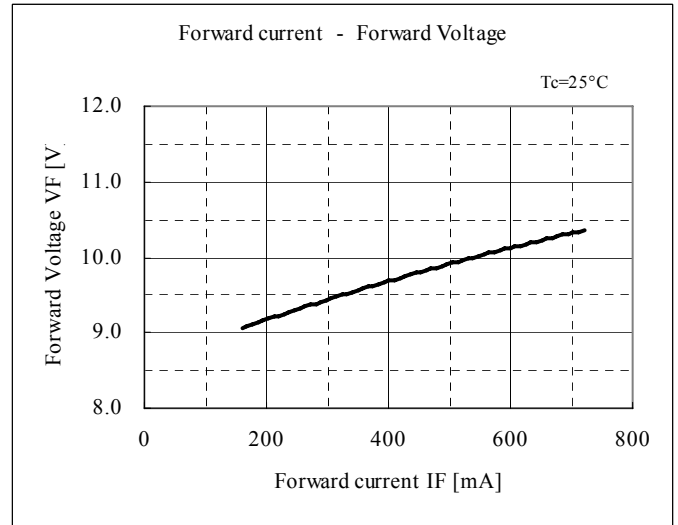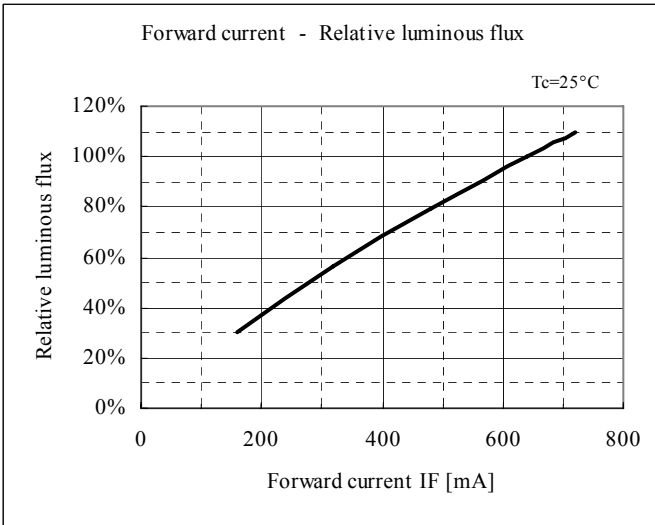

(*1) Above characteristics data are typical data and not a guaranteed data.

※ This specification is reference.

SHARP

4. Reliability

The reliability of products shall be satisfied with items listed below.

4-1. Test items and test conditions

Confidence level: 90%

No.	Test items	Test conditions	Samples n	Defective C	LTPD (%)
1	Temperature cycle	-40 °C(30 min)~+100 °C(30 min), 30 times	11	0	20
2	High temp and high humidity storage	Ta*=+60°C, RH=90%, t=1,000h	11	0	20
3	High temperature storage	Ta*= +100°C, t=1,000h	11	0	20
4	Low temperature storage	Ta*= -40 °C, t=1000h	11	0	20
5	Operating test	Tc=60 °C, IF=640mA, t=1,000h	11	0	20
6	Mechanical shock test	15,000 m/s ² , 0.5 ms ±X·±Y·±Z direction, 3 times	5	0	50
7	Variable frequency vibration	200 m/s ² , 100~2,000~100 Hz / sweep for 4 min. X·Y·Z direction, 4 times	5	0	50

4-2. Failure judgment criteria

No.	Parameter	Symbol	Failure judgment criteria (*2)
1	Forward voltage	V _F	V _F > U.S.L × 1.1
2	Luminous flux	Φ	Φ < Initial value × 0.5, Φ > Initial value × 2.0

※ This specification is reference.

SHARP

5. Incoming inspection

5-1. Inspection method

A single sampling plan, normal inspection S-4 based on ISO 2859-1 shall be adopted.

5-2. Description of inspection and criteria

No.	Inspection items	Criteria	Defect	AQL
1	Emission	No emission	Major defect	0.1%
2	Electro-optical characteristics	Not conforming to the specification (Forward voltage, Luminous flux and Chromaticity)	Minor defect	0.4%
3	Outline dimensions	Not conforming to the specification (Outline dimensions of ①、② in page3)		
4	Appearance	Nonconformity observed in product appearance is determined as good product except that electro-optical characteristics is affected by.		

*Products with removable foreign material attached on is not determined to be defective.

※ This specification is reference.




6. Supplement

6-1 Chromaticity coordinates

(Chromaticity table)

BN:High color rendering 5000K	x	0.338	0.337	0.351	0.357
	y	0.364	0.328	0.339	0.380

(Chromaticity coordinates)

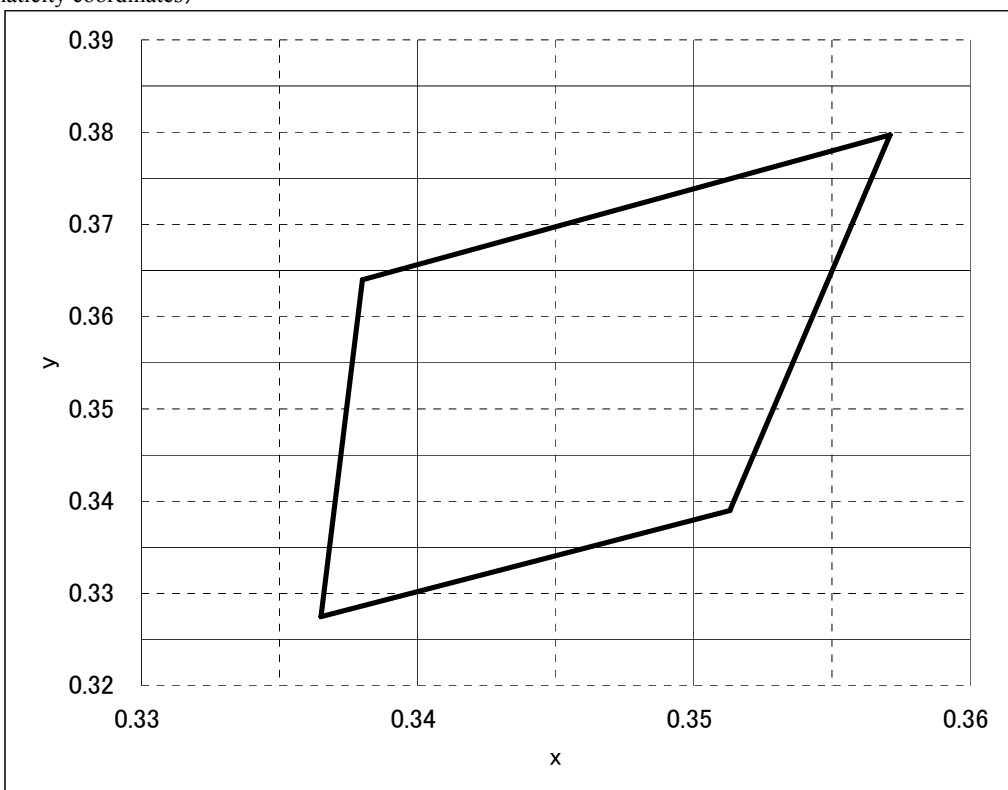


※ This specification is reference.

SHARP

6-2 Packing


- Amount in one box : 400 (2 bags)
- Amount in one bag : 200 (5 trays)
- Amount in one tray : 40
- Putting 5 pieces of tray in a damp proofing packing bag and 2 bags in a box.
- Dimensions of the box: 235×220×90mm

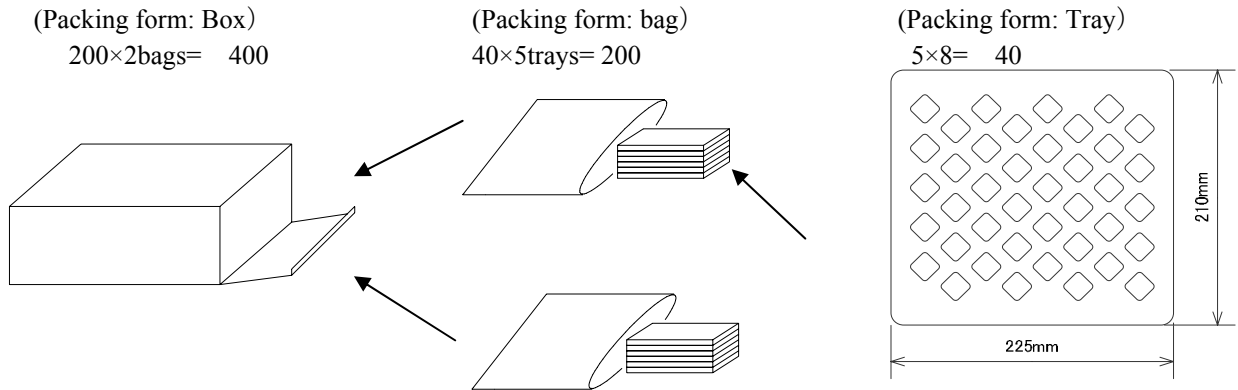

*The packing dimensions are reference.
There is a case to become another packing specifications.

6-3. Label

The following label is put on the packing box.



- ← Model number
- ← Quantity of products
- ← EIAJ C-3 Bar code
- ← EIAJ C-3 Bar code
- ← Lot number
- ← Production country

1) About Lot number

KA 08 1 A

- ① ② ③ ④

- ① Production plant code (to be indicated alphabetically)
- ② Year of production (the last two figures of the year)
- ③ Month of production
(to be indicated alphabetically with January corresponding to A)
- ④ Date of production (01~31)

6-4. Indication to the product

Model No. and Control NO. are indicated on the substrate surface.


Indication contents are to be announced.

- ① Model No.
Abbreviated Model No. "5BNF15L00" is indicated.
- ② Control No.
Control No. is indicated as below;

M 08 G 01

- ① ② ③ ④

- ① Production plant code (to be indicated alphabetically)
- ② Year of production (the last two figures of the year)
- ③ Month of production (to be indicated alphabetically with January corresponding to A)
- ④ Date of production (01 to 31)

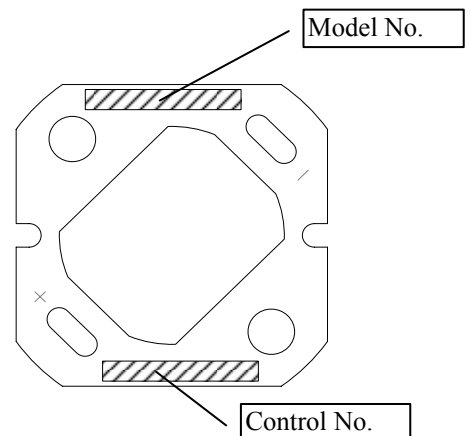

※ This specification is reference.

SHARP

7. Precautions

① Storage conditions

Please follow the conditions below.

- Before opened: Temperature 5~30°C, humidity less than 60%RH
- After opened: Temperature 5~30°C, humidity less than 60%RH (Please apply soldering within 1 week.)
- Avoid exposing to air with corrosive gas.
If exposed, electrode surface would be damaged, which may affect soldering.

② Usage conditions

The products are not designed for the use under any of the following conditions.

Please confirm their performance and reliability well enough if you use under any of the following conditions;

- In a place with a lot of moisture, dew condensation, briny air, and corrosive gas (Cl, H₂S, NH₃, SO₂, NO_x, etc.).
- Under the direct sunlight, outdoor exposure, and in a dusty place.
- In water, oil, medical fluid, and organic solvent.

③ Heat radiation

If the forward current(IF) is applied to single-state module at 360mA, there is a risk of damaging module or emitting smoke.

Equip with specified heat radiator, and avoid heat stuffed inside the module.


Applying thermal conductive sheet or grease between module and heat radiator enables heat to radiate effectively.

④ Installation

Material of board is alumina ceramic. If installed inappropriately, trouble of no radiation may occur due to board crack. Please take particular notice of install method.

Further information on installation, refer to the following cautions.

- Apply ether screws or adhesives, or both of them when installed to heat radiator.
In case of applying adhesive only, check the effectiveness before fixing.
In case of screw, apply thread locker in order to prevent loosening.
If LED comes off from the heat radiator, unusual temperature rise entails hazardous phenomena including device deterioration, coming off of solder at leads, and emitting smoke.
- Refer to recommended dimensions when installing with screws.



- Screw torque: Within 0.2Nm
If it is inefficient to tighten screws, apply locker to prevent loosening.
- It is recommended to apply screws which use low corrosive materials such as Stainless steel.
Avoid applying flat-head screws, which cause board crack due to applying stress to screw holes.
- Avoid convexly uneven boards.
Those convex boards are subject to crack when tightening screws.
- It is recommended to apply thermal conductive sheet or grease with adhesiveness and heat radiating-adhesives, because of thermal and mechanical combination between module and heat radiator.
However, depending on their thickness, board crack may be entailed by warped board, which is caused when tightening screws. So please check your actual conditions carefully as for the screw torque.

※ This specification is reference.

SHARP

⑤ Module surface strength

Module surface is subject to mechanical stress. Applying stress to surface of modules results in damage on resin, and inside-failure.

⑥ Connecting method

In case of solder connecting method, apply solder to the leads by soldering iron with thermo controller (tip temperature 380°C), within 10seconds per one place. Put the board on materials whose conductivity is poor enough not to radiate heat of soldering. Avoid touching yellow phosphor with soldering iron. This product is not designed for reflow and flow soldering.

⑦ Static electricity

This product is subject to static electricity, so take measures to cope with it. Install circuit protection device to drive circuit, if necessary.

⑧ Drive method

Module is composed of LEDs connected in both series and parallel. Constant voltage power supply runs off more than specified current amount due to lowered VF caused by temperature rise. Constant current power supply is recommended to drive. Any reverse voltage cannot be applied to LEDs when they are in operation or not. Design a circuit so that any flow of reverse or forward voltage can not be applied to LEDs when they are out of operation.

⑨ Cleaning

Avoid cleaning, since silicone resin is eroded by it.

⑩ Color-tone variation

Chromaticity of this product is monitored by integrating sphere right after the operation. Chromaticity varies depending on measuring method, light spread condition, or ambient temperature. Please verify your actual conditions before use.

⑪ Safety

Looking directly at LEDs for a long time may result in hurt your eyes. In case that excess current(over ratings) are supplied to the device, hazardous phenomena including abnormal heat generation, emitting smoke, or catching fire can be caused. Take appropriate measures to excess current and voltage. In case of solder connecting method, there is a possibility of fatigue failure by heat. Please fix the leads in such case to protect from short circuit or leakage of electricity caused by contact. Please confirm the safety standards or regulations of application devices.

Opto Specification

Opto/EC Group



NORTH AMERICA

Sharp Microelectronics of the Americas
5700 NW Pacific Rim Blvd.
Camas, WA 98607, U.S.A.
Phone: (1) 360-834-2500
Fax: (1) 360-834-8903
www.sharpsma.com

TAIWAN

Sharp Electronic Components
(Taiwan) Corporation
8F-A, No. 16, Sec. 4, Nanking E. Rd.
Taipei, Taiwan, Republic of China
Phone: (886) 2-2577-7341
Fax: (886) 2-2577-7326/2-2577-7328

CHINA

Sharp Microelectronics of China
(Shanghai) Co., Ltd.
28 Xin Jin Qiao Road King Tower 16F
Pudong Shanghai, 201206 P.R. China
Phone: (86) 21-5854-7710/21-5834-6056
Fax: (86) 21-5854-4340/21-5834-6057
Head Office:
No. 360, Bashen Road,
Xin Development Bldg. 22
Waigaoqiao Free Trade Zone Shanghai
200131 P.R. China
Email: smc@china.global.sharp.co.jp

EUROPE

Sharp Microelectronics Europe
Division of Sharp Electronics (Europe) GmbH
Sonninstrasse 3
20097 Hamburg, Germany
Phone: (49) 40-2376-2286
Fax: (49) 40-2376-2232
www.sharpsme.com

SINGAPORE

Sharp Electronics (Singapore) PTE., Ltd.
438A, Alexandra Road, #05-01/02
Alexandra Technopark,
Singapore 119967
Phone: (65) 271-3566
Fax: (65) 271-3855

KOREA

Sharp Electronic Components
(Korea) Corporation
RM 501 Geosung B/D, 541
Dohwa-dong, Mapo-ku
Seoul 121-701, Korea
Phone: (82) 2-711-5813 ~ 8
Fax: (82) 2-711-5819

JAPAN

Sharp Corporation
Electronic Components & Devices
22-22 Nagaïke-cho, Abeno-Ku
Osaka 545-8522, Japan
Phone: (81) 6-6621-1221
Fax: (81) 6117-725300/6117-725301
www.sharp-world.com

HONG KONG

Sharp-Roxy (Hong Kong) Ltd.
3rd Business Division,
17/F, Admiralty Centre, Tower 1
18 Harcourt Road, Hong Kong
Phone: (852) 28229311
Fax: (852) 28660779
www.sharp.com.hk
Shenzhen Representative Office:
Room 13B1, Tower C,
Electronics Science & Technology Building
Shen Nan Zhong Road
Shenzhen, P.R. China
Phone: (86) 755-3273731
Fax: (86) 755-3273735

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty.

The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied.

ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or responsible in any way, for any incidental or consequential economic or property damage.