

Description: 2012 1.57G&2.4G&5GHz Triplexer
PART NUMBER: TPX2012LL90R1525A
Features:

- Compact size : 2.0x1.2x0.9mm
- RoHS compliant

Applications:

- WLAN, 802.11a/b/g/n
- ISM Band
- GPS

ELECTRICAL SPECIFICATIONS

DESCRIPTION	VALUE		
	Low Band	Middle Band	High Band
Pass Band	1570~1610MHz	2400~2500MHz	4900~5950MHz
Insertion loss	0.8dB (Max) at 25°C	0.7dB (Max) at 25°C	0.8dB (Max) at 25°C
V.S.W.R /Return-Loss	2.0(Max)/10.0dB(Min)	2.0(Max) /10.0dB(Min)	1.6(Max) /13.0dB(Min)
Attenuation	20dB(Min).@2.4~2.5GHz 20dB(Min).@4.8~6.0GHz	17.5dB(Min).@4.8~5.0GHz 10dB(Min).@7.2~7.5GHz 10dB(Min).@9.6~10.0GHz	27dB(Min).@0.86~0.96GHz 25dB(Min).@1.545~1.605GHz 25dB(Min).@1.71~1.99GHz 30dB(Min).@2.17GHz 8dB(Min).@8.1GHz 15dB(Min).@8.82~9.8GHz 27dB(Min).@9.8~10.76GHz 25dB(Min).@10.76~11.8GHz
Isolation	Middle Band to High Band: 17dB(Min). @4.8~5.0GHz Middle Band to Low Band: 20dB(Min).@1.559~1.606GHz High Band to Low Band: 25dB(Min). @1.559~1.606GHz		
Operating Temperature	-40 ~ 85°C		
Dimension	2.0 x 1.2 x 0.9mm		

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters
 15255 Innovation Drive #100
 San Diego, CA 92128
 USA
 Tel:1-858-674-8100

Pulse/Larsen Antennas
 18110 SE 34th St Bldg 2 Suite 250
 Vancouver, WA 98683
 USA
 Tel: 1-360-944-7551

Europe Headquarters
 Pulse GmbH & Do, KG
 Zeppelinstrasse 15
 Herrenberg, Germany
 Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
 99 Huo Ju Road(#29 Bldg,4th Phase
 Suzhou New District
 Jiangsu Province, Suzhou 215009 PR China
 Tel: 86 512 6807 9998




Description: 2012 1.57G&2.4G&5GHz Triplexer

PART NUMBER: TPX2012LL90R1525A

MECHANICAL DIMENSION

Outline

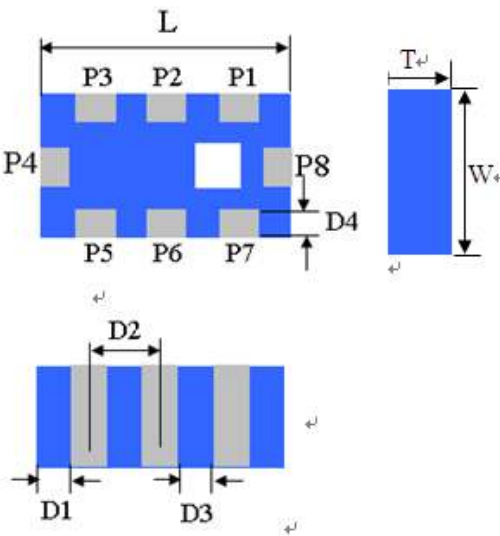


Termination

Terminal name	Dimension
P1	GND
P2	Common
P3	GND
P4	Middle band
P5	GND
P6	High band
P7	GND
P8	Low band

Mechanical

	Dimension
L (mm)	2.00±0.15
W (mm)	1.25±0.15
T (mm)	0.90±0.15
P1 (mm)	0.40±0.15
P2 (mm)	0.40±0.15
P3 (mm)	0.40±0.15
P4 (mm)	0.50±0.15
P5 (mm)	0.40±0.15
P6 (mm)	0.40±0.15
P7 (mm)	0.40±0.15
P8 (mm)	0.50±0.15
D1 (mm)	0.2±0.15
D2 (mm)	0.65±0.15
D3 (mm)	0.35±0.15
D4 (mm)	0.3±0.15

Reference design of EVB

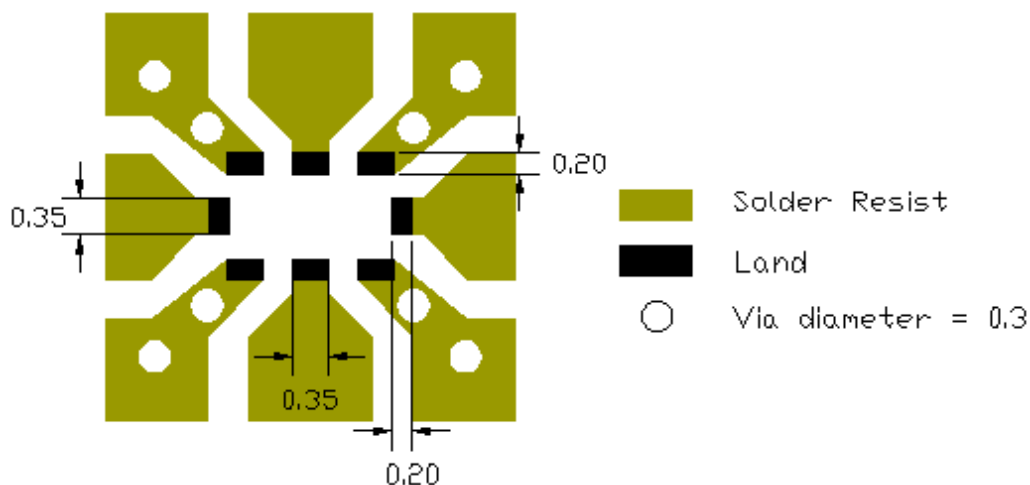

Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 2012 1.57G&2.4G&5GHz Triplexer

PART NUMBER: TPX2012LL90R1525A

ELECTRICAL PERFORMANCES

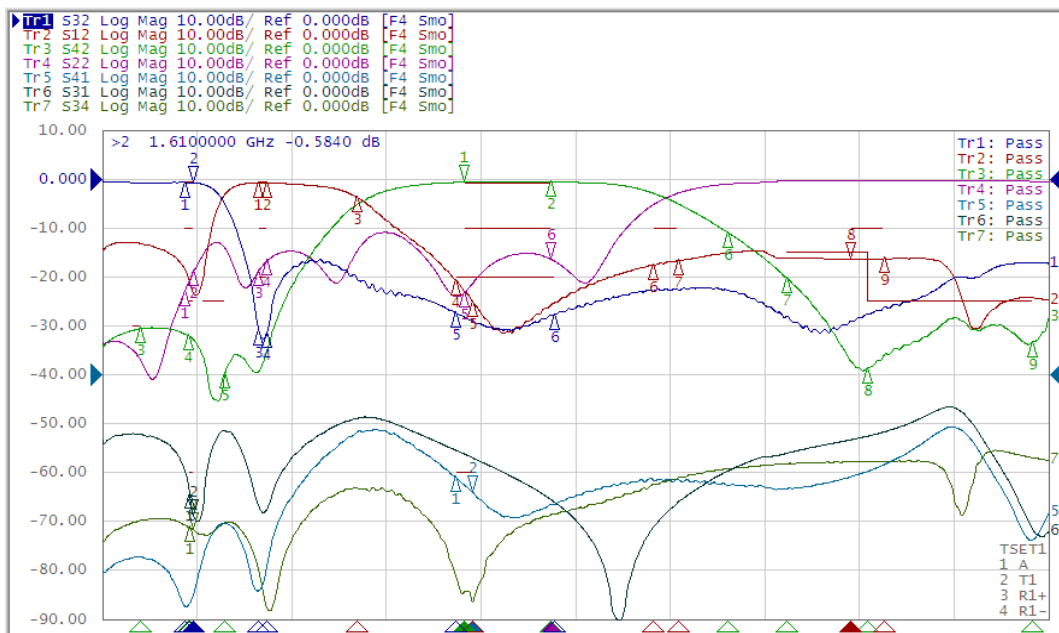

- Measured on Agilent E5071C Network Analyzer
- Common port: Port 2 (Return loss S22)
- Low band port: Port 3 (Low band insertion loss S32)
- Middle band port Port1 (Middle band insertion loss S12)
- High band port: Port 4 (High band insertion loss S42)

Ch1	Tr1	S32	1	1.500000	GHZ	-0.5648	dB	Ch1	Tr4	S22	1	1.500000	GHZ	-22.734	dB
Ch1	Tr1	S32	>2	1.610000	GHZ	-0.5840	dB	Ch1	Tr4	S22	2	1.610000	GHZ	-18.596	dB
Ch1	Tr1	S32	3	2.400000	GHZ	-30.695	dB	Ch1	Tr4	S22	3	2.400000	GHZ	-18.478	dB
Ch1	Tr1	S32	4	2.500000	GHZ	-31.145	dB	Ch1	Tr4	S22	4	2.500000	GHZ	-16.460	dB
Ch1	Tr1	S32	5	4.800000	GHZ	-27.212	dB	Ch1	Tr4	S22	5	4.900000	GHZ	-22.957	dB
Ch1	Tr1	S32	6	6.000000	GHZ	-27.493	dB	Ch1	Tr4	S22	6	5.950000	GHZ	-16.136	dB
Ch1	Tr2	S12	1	2.400000	GHZ	-0.5519	dB	Ch1	Tr5	S41	1	4.800000	GHZ	-20.778	dB
Ch1	Tr2	S12	2	2.500000	GHZ	-0.5660	dB	Ch1	Tr5	S41	2	5.000000	GHZ	-23.837	dB
Ch1	Tr2	S12	3	3.600000	GHZ	-3.6146	dB	Ch1	Tr6	S31	1	1.559000	GHZ	-24.081	dB
Ch1	Tr2	S12	4	4.800000	GHZ	-20.568	dB	Ch1	Tr6	S31	2	1.606000	GHZ	-28.696	dB
Ch1	Tr2	S12	5	5.000000	GHZ	-24.979	dB	Ch1	Tr7	S34	1	1.559000	GHZ	-31.004	dB
Ch1	Tr2	S12	6	7.200000	GHZ	-17.350	dB	Ch1	Tr7	S34	2	1.606000	GHZ	-31.464	dB
Ch1	Tr2	S12	7	7.500000	GHZ	-16.398	dB								
Ch1	Tr2	S12	8	9.600000	GHZ	-16.105	dB								
Ch1	Tr2	S12	9	10.000000	GHZ	-16.033	dB								
Ch1	Tr3	S42	1	4.900000	GHZ	-0.6015	dB								
Ch1	Tr3	S42	2	5.950000	GHZ	-0.6687	dB								
Ch1	Tr3	S42	3	960.00000	MHZ	-30.368	dB								
Ch1	Tr3	S42	4	1.545000	GHZ	-31.794	dB								
Ch1	Tr3	S42	5	1.990000	GHZ	-39.506	dB								
Ch1	Tr3	S42	6	8.100000	GHZ	-10.685	dB								
Ch1	Tr3	S42	7	8.820000	GHZ	-20.010	dB								
Ch1	Tr3	S42	8	9.800000	GHZ	-38.457	dB								
Ch1	Tr3	S42	9	11.800000	GHZ	-33.135	dB								

Frequency Characteristics

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 2012 1.57G&2.4G&5GHz Triplexer

PART NUMBER: TPX2012LL90R1525A

REVISION HISTORY

Revision	Date	Description
Version 1	Set. 30, 2020	- New issue