	Drawing Title: HOSPITAL GRADE NEMA 5-20P CONNECTOR, 2 PRONG + GROUND to NORTH AMERICAN IEC60320-C19 CONNECTOR, GT Cable #136: 12 / 3 Conductors, 10.8mm OD, SJT, 60 Deg.C, 300V, BLK/WHT/GRN, Approvals: , 2440±50mm, GlobTek Black		
186 Veterans Drive,	Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 320M1368F7032(R)	Rev A1	
Fax (201) 784-0111			

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <u>https://www.globtek.com/iso-certificates/</u> Prop 65 Statement:https://en.globtek.com/prop-65-statement.pdf

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (<u>https://en.globtek.com/terms-and-conditions/</u>).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc. Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2021 - 2023

	Drawing Title: HOSPITAL GRADE NEMA 5-20P CONNECTOR, 2 PRONG + GROUND to NORTH AMERICAN IEC60320-C19 CONNECTOR, GT Cable #136: 12 / 3 Conductors, 10.8mm OD, SJT, 60 Deg.C, 300V, BLK/WHT/GRN, Approvals: , 2440±50mm, GlobTek Black		
•	Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 320M1368F7032(R)	Rev A1	
Fax (201) 784-0111			

REVISION HISTORY

REV DESCRIPTION		DESCRIPTION	SUB	DATE	APPROVED
	A1	Update hanking from 200±20 mm to 250±30 mm	QA	09/15/2022	QA
	А	Initial release	QA	11/10/2021	QA

Cordset Information:

CordsetColor:GlobTek Black

Cord Length (mm):2440±50


NOTES:

Cord, Plug and Connector must be marked with approval symbols of file number(s)

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2021 - 2023


GlobTek, Inc. www.globtek.com	Drawing Title: HOSPITAL GRADE NEMA 5-20P CONNECTOR, 2 PRONG + GROUND to NORTH AMERICAN IEC60320-C19 CONNECTOR, GT Cable #136: 12 / 3 Conductors, 10.8mm OD, SJT, 60 Deg.C, 300V, BLK/WHT/GRN, Approvals: , 2440±50mm, GlobTek Black	
186 Veterans Drive,	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. 320M1368F7032(R)	Rev A1
Fax (201) 784-0111		

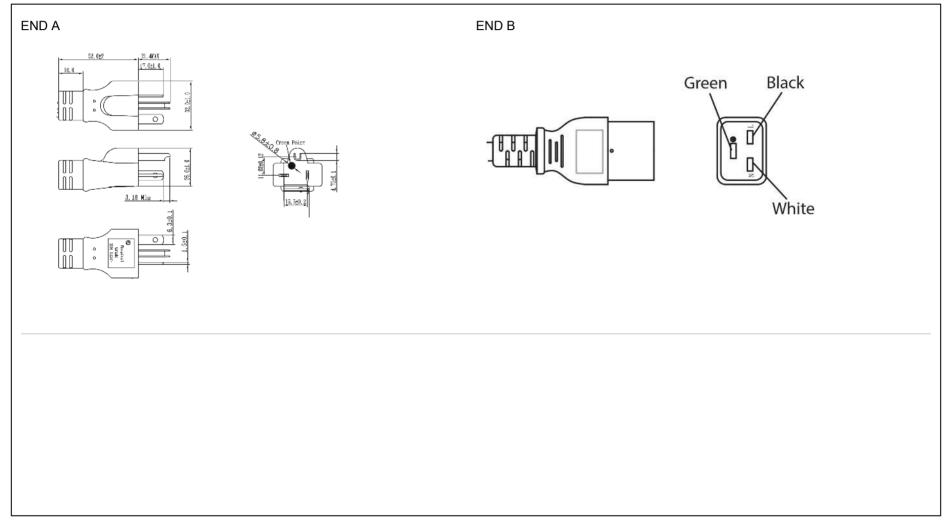

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2021 - 2023

GlobTek, Inc. www.globtek.com	vww.globtek.com		
186 Veterans Drive,			
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 320M1368F7032(R)	Rev A1	
Fax (201) 784-0111			

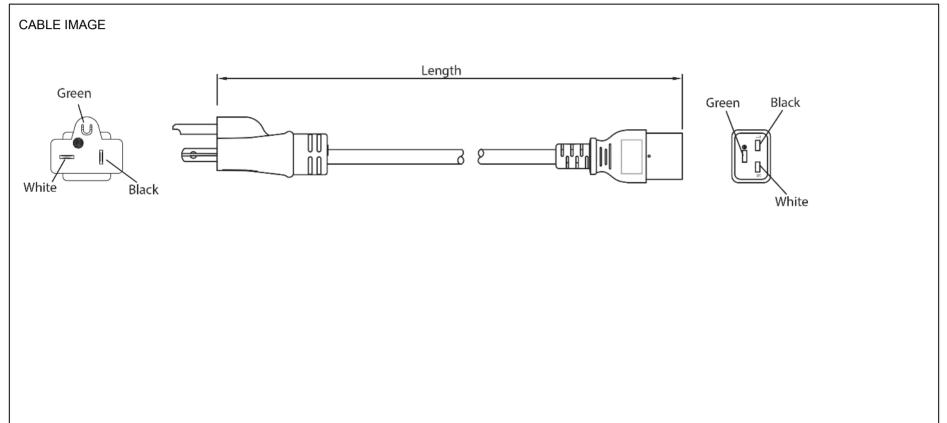

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2021 - 2023

GlobTek, Inc. www.globtek.com	Drawing Title: HOSPITAL GRADE NEMA 5-20P C 300V, BLK/WHT/GRN, Approvals: , 2440±50mm, C Model No. Power Cord	CONNECTOR, 2 PRONG + GROUND to NORTH AMERICAN IEC60320-C19 CC GlobTek Black	NNECTOR, GT Cable #136: 12 / 3 Conductors, 1	0.8mm OD, SJT, 60 Deg.C,	
186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111				Rev A1	
https://www.globtek.com	n/connectors/ STANDARD PLUGS AND C	TIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. CONNECTORS CAN BE SEEN ONLINE AT <u>https://www.globtek.</u> W DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWIS	com/connectors/ ACTUAL CONNECTO		
End A Code:320M Description:HOSPITA 2 PRONG + GROUNI Rating (V):125 Rating (A):20.0 Gender:Male Overmolded:Yes		Cable Code:136 Description:GT Cable #136: 12 / 3 Conductors, 10.8mm OD, SJT, 60 Deg.C, 300V, BLK/WHT/GRN, Approvals: Color:GlobTek Black Wire Gauge(AWG):12 Cond:3 Type:SJT Temperature:60° C Amps:20 Volts:300 OD:10.8 ConductorsColors:BLK/WHT/GRN	End B Code:7032UL1 Description:NORTH AMERICAN IEC CONNECTOR Rating (V):250 Rating (A):20.0 Gender:Female Overmolded:Yes	60320-C19	
Overall cable rating:1	25V 20A	Cable Approvals	Connector Approvals		
			لل _{or} در الله		
assemblies of UL rate	ed parts, so, the combination of UL CSA ectors, andf cables total up to a UL or cable assembly CUL rds listing @ UL	A assemblies of UL rated parts, so, the combination of UL CS, certified plugs, connectors, andf cables total up to a UL or	Note: North American power cords at A assemblies of UL rated parts, so, the certified plugs, connectors, andf cabl L approved cordset or cable assembly <u>LINK TO CERTS</u> Link to live Power Cords listing @ UL Link to live Flexible Cord listing @ UL	combination of UL CSA es total up to a UL or CUL	
AGENCY ONLINE DO	OCUMENTS http://en.glo	bbtek.com/cordsets/			

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2021 - 2023

	ek.com 300V, BLK/WHT/GRN, Approvals: , 2440±50mm, GlobTek Black			
°				
Northvale, NJ 07647				
Tel. (201) 784-1000	Part No./Ordering No. 320M1368F7032(R)	Rev A1		
Fax (201) 784-0111				

RoHS/RoHS3 Declaration	https://www.globtek.com/pdf/rohs_cert/01t3a000005JwPJAA0
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf
Prop 65 Statement	https://en.globtek.com/prop-65-statement.pdf
CE.UKCA.Cord	https://globtek.secure.force.com/spec/ec_decl_product_model_family_incl_cord?id=01t3a000005JwPJ
IDVO/ anti- a in the second se	and such as a should should be a low it should be at such as Line LIDVA as in a face and size

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2021 - 2023

GlobTek, Inc. www.globtek.com	Drawing Title: HOSPITAL GRADE NEMA 5-20P CONNECTOR, 2 PRONG + GROUND to NORTH AMERICAN IEC60320-C19 CONNECTOR, GT Cable #136: 12 / 3 Conductors, 10 300V, BLK/WHT/GRN, Approvals: , 2440±50mm, GlobTek Black	0.8mm OD, SJT, 60 Deg.C,
186 Veterans Drive,	Model No. Power Cord	
Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Part No./Ordering No. 320M1368F7032(R)	Rev A1
https://www.globtek.com	HS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AN <u>Aconnectors/</u> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <u>https://www.globtek.com/connectors/</u> ACTUAL CONNECTOR SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE	
Hanking:320M-7032 Description:250±30 n Image:		
Notes/Modifications/C	Customizations (notes in this section supersede the values shown in the standard spec):	

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2021 - 2023