


LOC	DIST	REVISIONS			P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—				F		Plating change from MIN. 0.8µm gold plating to min. 0.7µm Pd Ni + 0.1µm gold flash at contact area (Area F).	30SEP2014	PS	JK
WAR NR. 3-88-9833-0										
PASSEND ZU PROJ.-NR. E 90-52554										

POLZ. PRO REIHE	L±0.4	BESTELL-NR.		
-	-	-	-	
2	5.08	—	2	△
3	7.62	—	3	△
4	10.16	—	4	△
5	12.70	—	5	△
6	15.24	—	6	△
7	17.78	—	7	△
8	20.32	—	8	△
9	22.86	—	9	△
10	25.40	1-	-0	
11	27.94	1	1	△
12	30.48	1	2	△
13	33.02	1	3	△
14	35.56	1	4	△
15	38.10	1-	-5	△
16	40.64	1-	-6	
17	43.18	1	7	△
18	45.72	1	8	△
19	48.26	1	9	△
20	50.80	2-	-0	
21	53.34	2	1	△
22	55.88	2	2	△
23	58.42	2	3	△
24	60.96	2	4	△
25	63.50	2	5	△
26	66.04	2-	-6	
27	68.58	2	7	△
28	71.12	2	8	△
29	73.66	2	9	△
30	76.20	3-	829587-0	
31	78.74	3	1	△
32	81.28	3	2	△
33	83.82	3	3	△
34	86.36	3	4	△
35	88.90	3	5	△
36	91.44	3	6	△
37	93.98	3	7	△
38	96.52	3	8	△
39	99.06	3	9	△
40	101.60	4	0	△
41	104.14	4	1	△
42	106.68	4	2	△
43	109.22	4	3	△
44	111.76	4	4	△
45	114.30	4	5	△
46	116.84	4	6	△
47	119.38	4	7	△
48	121.92	4	8	△
49	124.46	4	9	△
50	127.00	5-	-0	

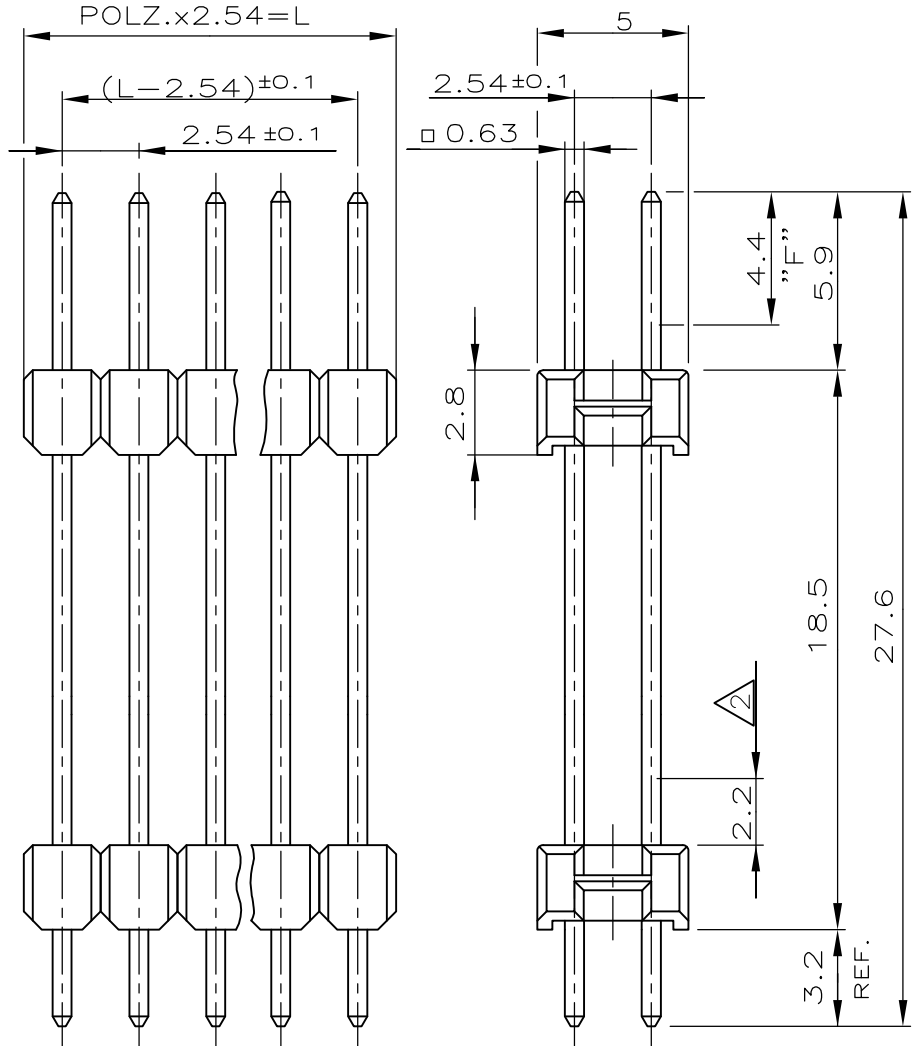

- △ OBSOLETE
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- △ STIFTE IN DIESEM BEREICH TEILWEISE BLANK
- △ STECKSEITE: IM BEREICH "F" 0.7µm PdNi+0.1µm GOLD FLASH ÜBER 1.27µm NICKEL
- △ LÖTSEITE: MIN. 2.5µm ZINN ÜBER 1.27µm NICKEL

KONTAKT	CuSn	△
STIFTGEHÄUSE	PBT	GRÜN
BENENNUNG	WERKSTOFF	OBERFLÄCHE FARBE

ZEICHNUNG GÜLTIG AB KW 6/93

THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED.

DIMENSIONS: mm	DWN A.HO 17.04.90	MATERIAL SEE TABLE	FINISH SEE TABLE
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2 mm	CHK M.SCHAARSCHMIDT	TE Connectivity	
0 PLC ± -	APVD -		
1 PLC ± -	PRODUCT SPEC	NAME	
2 PLC ± -	108-18012	SPEZIAL AMPMODU II STIFTLISTE	
3 PLC ± -	APPLICATION SPEC	ZWEIREIHIG	
4 PLC ± -	WEIGHT -	SIZE A4	CAGE CODE 00779
ANGLES ± -	CUSTOMER DRAWING	DRAWING NO C-829587	RESTRICTED TO -
		SCALE 4:1	SHEET 1 OF 1
		REV F	