

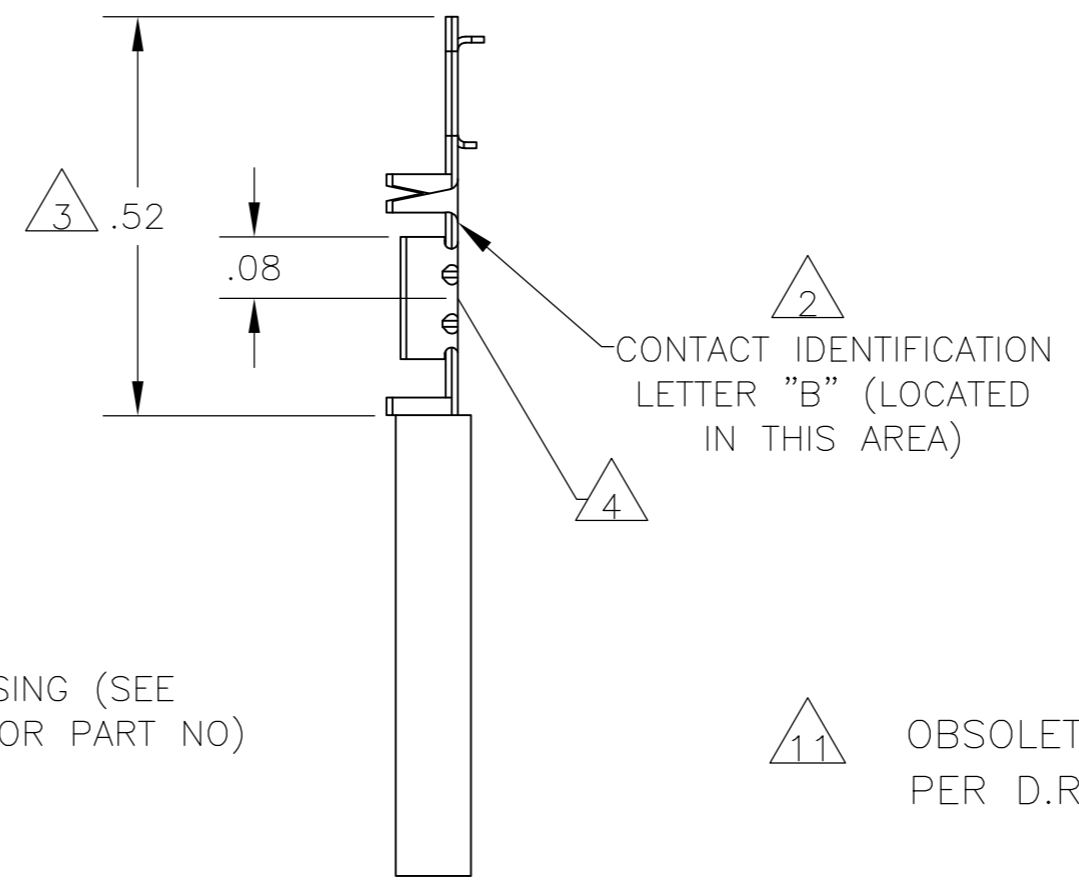
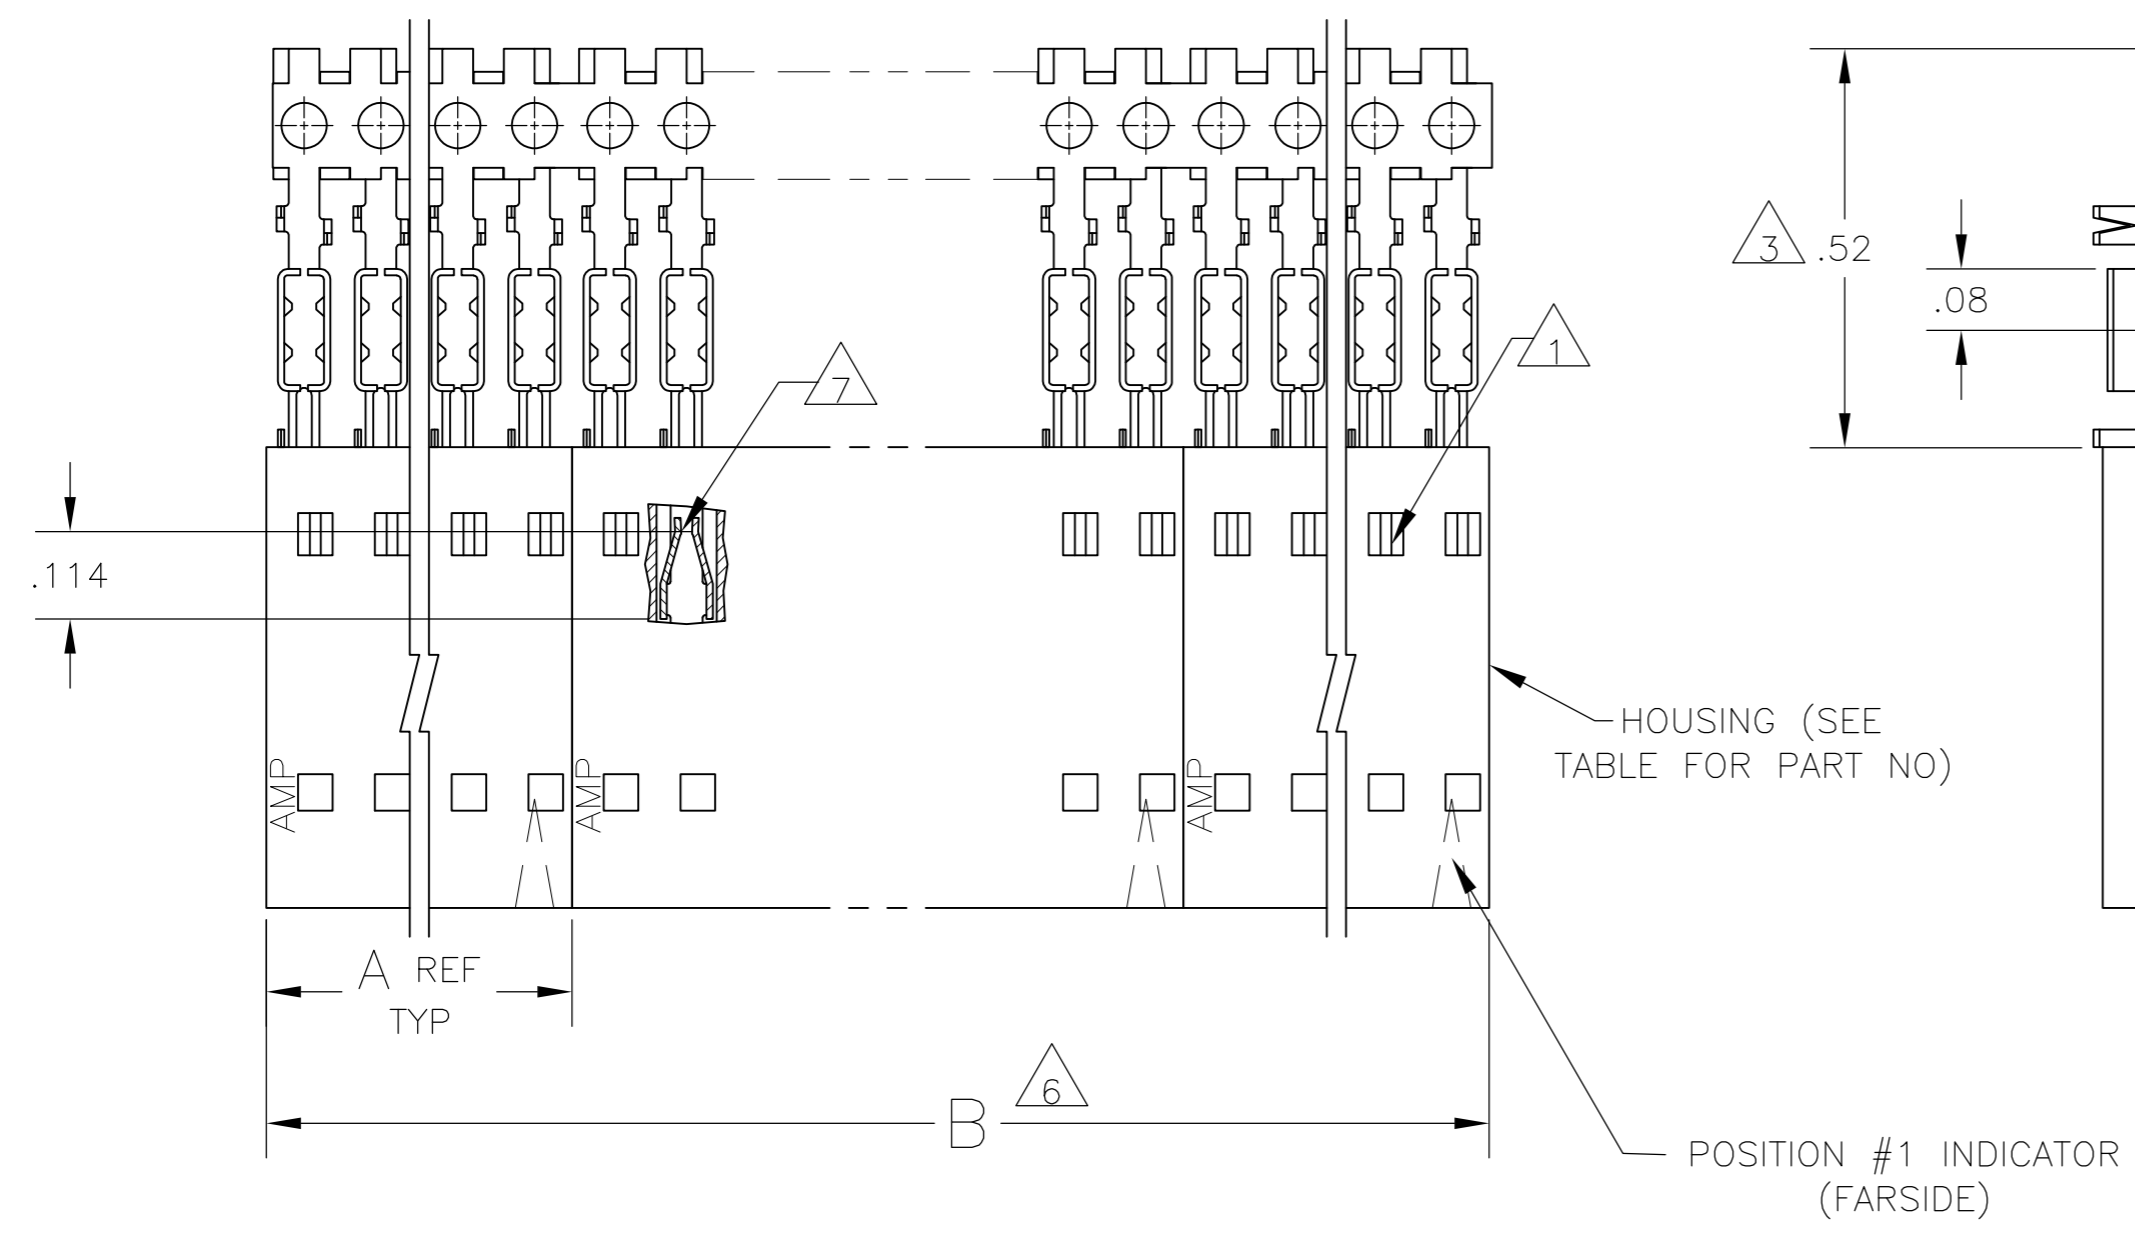


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		K2		REVISED PER ECO-11-004820	11MAR11	RK	HMR

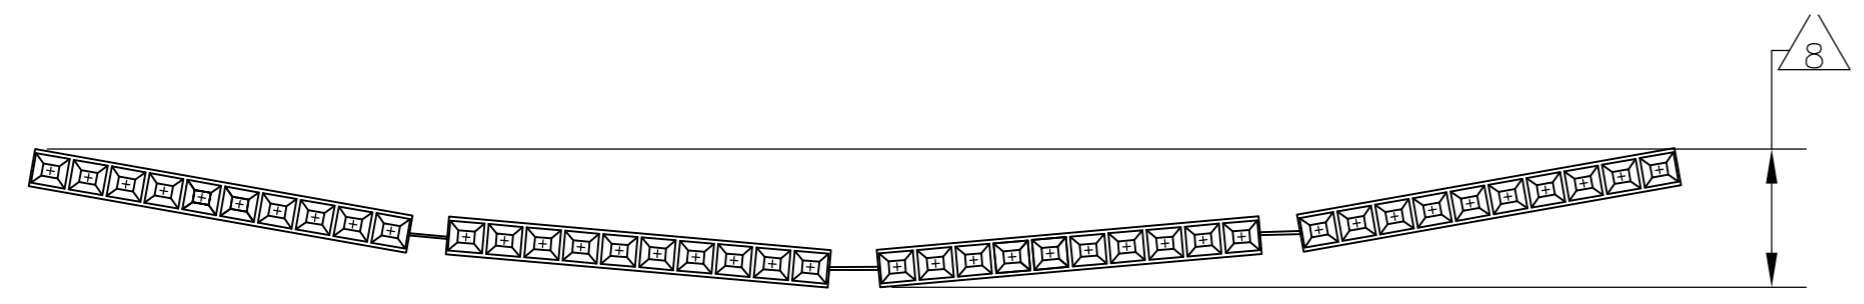

△11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

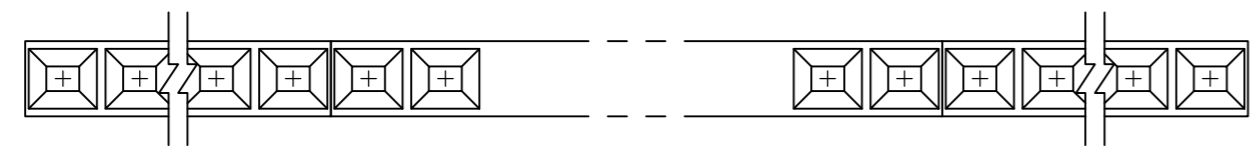

EXAMPLE: STRIP ASSEMBLY
SCALE 2:1

- △1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- △2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- △3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- △4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103687
- △6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- △7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- △8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- △9 CONTACTS: .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL.
- △10 CONTACTS: .000100-.000200 MATTE TIN OVER .000050 NICKEL.

△11	OBSOLETE	△10	2	2.40	1.198	1-103688-1	12	6-103974-1
△11	OBSOLETE	△10	2	2.20	1.098	1-103688-0	11	6-103974-0
△11	OBSOLETE	△10	2	2.00	.998	103688-9	10	5-103974-9
△11	OBSOLETE	△10	2	1.80	.898	103688-8	9	5-103974-8
		△10	2	1.60	.798	103688-7	8	5-103974-7
		△10	2	1.40	.698	103688-6	7	5-103974-6
		△10	4	2.39	.598	103688-5	6	5-103974-5
		△10	4	1.99	.498	103688-4	5	5-103974-4
		△10	5	1.99	.398	103688-3	4	5-103974-3
		△10	8	2.40	.298	103688-2	3	5-103974-2
		△10	10	2.00	.198	103688-1	2	5-103974-1
		△9	2	2.40	1.198	1-103688-1	12	1-103974-1
△11	OBSOLETE	△9	2	2.20	1.098	1-103688-0	11	1-103974-0
		△9	2	2.00	.998	103688-9	10	103974-9
△11	OBSOLETE	△9	2	1.80	.898	103688-8	9	103974-8
		△9	2	1.60	.798	103688-7	8	103974-7
		△9	2	1.40	.698	103688-6	7	103974-6
		△9	4	2.39	.598	103688-5	6	103974-5
		△9	4	1.99	.498	103688-4	5	103974-4
		△9	5	1.99	.398	103688-3	4	103974-3
		△9	8	2.40	.298	103688-2	3	103974-2
		△9	10	2.00	.198	103688-1	2	103974-1
		△6		B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN L. MAYER 05 NOV 1986
 CHK P.C.DEJONG 11-12-86
 APVD P.C.DEJONG 11-13-86
 PRODUCT SPEC 108-25034
 APPLICATION SPEC 114-25026
 WEIGHT -
 CUSTOMER DRAWING

TE Connectivity
 RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, FOR NO 22-NO 26 AWG WIRE SIZE, STRIP FORM
 SIZE A2 CAGE CODE 00779 C=103974
 SCALE 4:1 SHEET 1 of 1 REV K2