
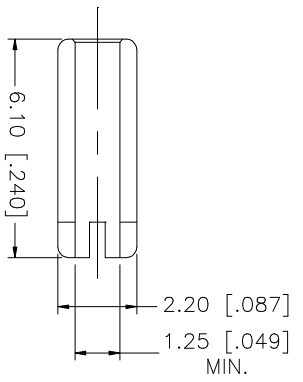


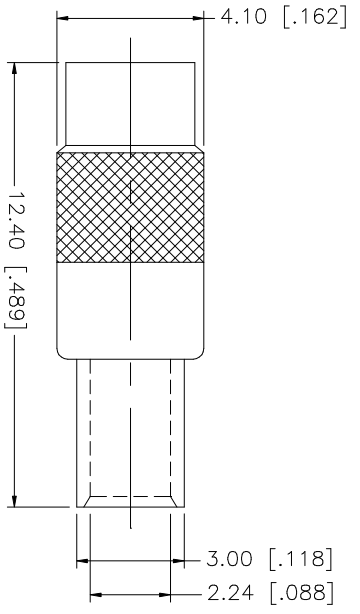


REV.	DATE	DESCRIPTION
NC	05/08/03	INITIAL RELEASE



NOTE:
1. CONTACT PIN TO SOLDER

QTY	FINISH	MATERIAL	DESCRIPTION
1	GOLD	BRASS	SOLDER BARREL
1	GOLD	BER, COPPER	CONTACT PIN
1	NATURAL	TEFLON	INSULATOR
1	GOLD	BRASS	BODY
			DESCRIPTION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
	0.5 - 30mm ± 0.20mm	.020 - .315 = ± 0.007"
	30 - 120mm ± 0.50mm	.315 - 1.180 = ± 0.015"
		1.180 - 4.724 = ± 0.020"

APPROVALS	DATE
DRAWN G.R.S.	05/08/03
CHECKED	
ISSUED	
SHEET 1 OF 1	

PART DESCRIPTION	PART NO.
MMCX SEMI-RIGID JACK (FOR .047" SEMI-RIGID CABLE)	262125

CAD FILE	DWG. NO.	REV.	NC	SIZE	SCALE
C:/262/262125.DWG	262125.DWG			A	NA

Amphenol Connex