


REV.	DATE	DESCRIPTION
A	01/13/99	ADD CRIMP NOTES / CHANGE FERRULE DIMS.
B	05/01/04	UPDATE DRAWING FORMAT

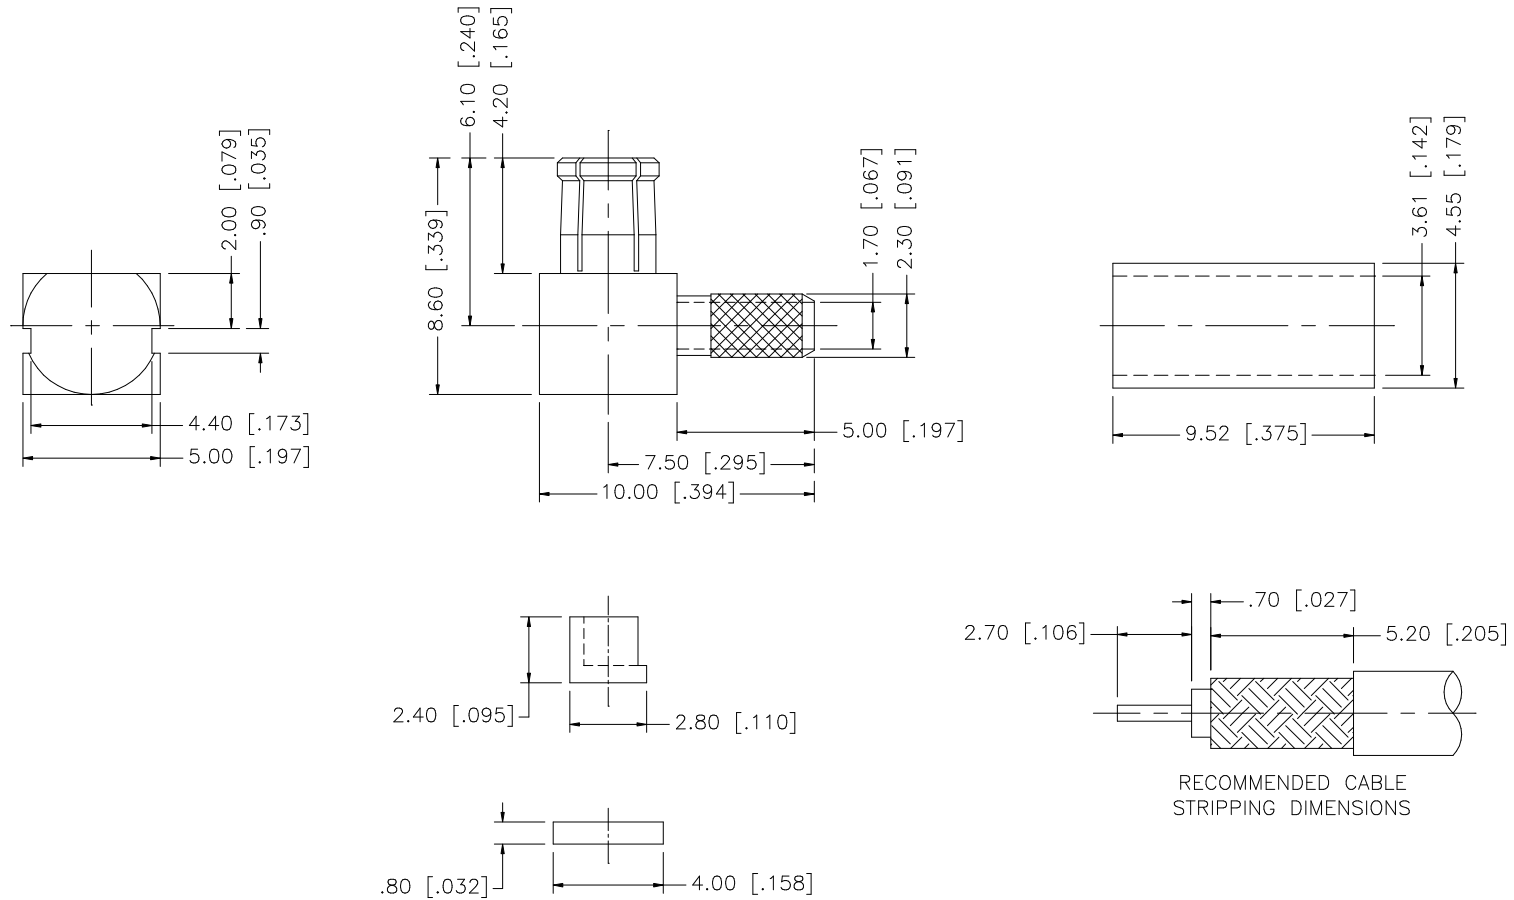

RECOMMENDED CABLE STRIPPING DIMENSIONS

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER

					APPROVALS	DATE	<h1 style="color: blue; margin: 0;">Amphenol Connex</h1>				
8					DRAWN	G.R.S.					05/01/04
7					CHECKED			PART NO. 252119			
6	FERRULE	COPPER	GOLD	1	ISSUED						
5	COVER	BRASS	GOLD	1	SHEET	1 OF 1		REV. B			
4	INSULATOR	DELTRIN	NATURAL	1							
3	CONTACT PIN	BRASS	GOLD	1				SCALE NA			
2	INSULATOR	TEFLON	NATURAL	1							
1	BODY	BER. COPPER	GOLD	1				DO NOT SCALE DRAWING			
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</small>											
<small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm</small>											
<small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 ± 0.007" .315 - 1.180 ± 0.015" 1.180 - 4.724 ± 0.020"</small>											