

Buchanan

TE Internal #: 1546306-3 Barrier Strips, Dual Barrier, Wire-to-Wire, 3 Position, 9.53 mm [.375 in] Centerline, 2 Row, Operating Voltage 300 V, 22 – 12 AWG Wire Size

View on TE.com >

Connectors > Terminal Blocks & Strips > Barrier Strips



Barrier Strip Style: Dual Barrier

Connector System: Wire-to-Wire

Number of Positions: 3

Centerline (Pitch): 9.53 mm [.375 in]

Number of Rows: 2

Features

Product Type Features

Block Style	Non-Feed Through
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable



Configuration Features

Number of Levels	1
Number of Positions	3
Number of Rows	2
Electrical Characteristics	
Operating Voltage	300 V
Body Features	
Quick Connect Tab Plating Material	Tin
Primary Product Color	Black
Product Orientation	Vertical
Barrier Strip Style	Dual Barrier
Contact Features	
Contact Base Material	Brass
Contact Current Rating (Max)	20 A
Mechanical Attachment	

Barrier Strips, Dual Barrier, Wire-to-Wire, 3 Position, 9.53 mm [.375 in] Centerline, 2 Row, Operating Voltage 300 V, 22 – 12 AWG Wire Size



Screw Plating Material	Nickel
Screw Material	Steel
Mounting Options	End Mounting Ears
Thread Size	6-32
Connector Mounting Type	Panel Mount
Housing Features	
Housing Material	Thermoplastic
Centerline (Pitch)	9.53 mm[.375 in]
Dimensions	
Product Length	45.7 mm[1.8 in]
Wire Size	.3 – 3 mm²
Usage Conditions	
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	200
Packaging Method	Carton
Other	
Terminal Blocks & Strips Comment	Other options available upon request, consult our Product Information Center.
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235)

Barrier Strips, Dual Barrier, Wire-to-Wire, 3 Position, 9.53 mm [.375 in] Centerline, 2 Row, Operating Voltage 300 V, 22 – 12 AWG Wire Size



Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Wave solder capable to 265°C

Halogen Content

Solder Process Capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 5-1437418-4 J6140=JUMPER S T 3/8 40 CKTS

Customers Also Bought

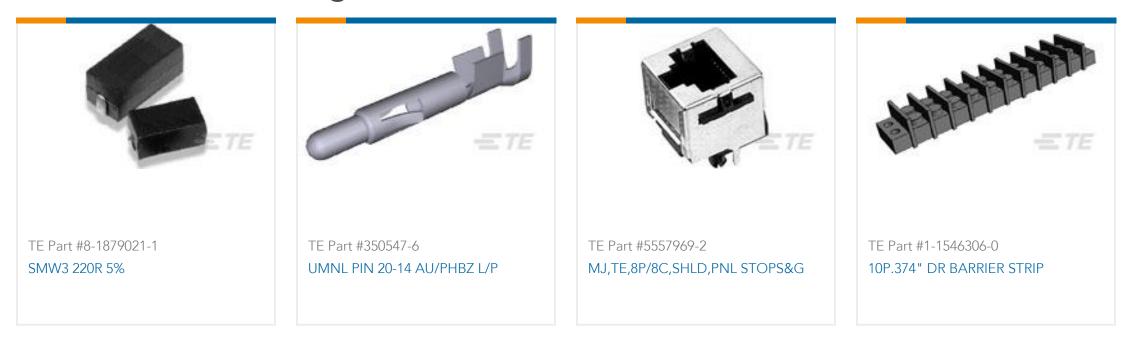

Barrier Strips, Dual Barrier, Wire-to-Wire, 3 Position, 9.53 mm [.375 in] Centerline, 2 Row, Operating Voltage 300 V, 22 – 12 AWG Wire Size







Documents

Product Drawings 3P .374" DR BARRIER STRIP

English

CAD Files Customer View Model ENG_CVM_CVM_1546306-3_K1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_1546306-3_K1.2d_dxf.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_1546306-3_K1.3d_igs.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages BUCHANAN TERMINAL BLOCKS CATALOG - BARRIER STRIPS

English

1-1773458-2_BARRIER_STRIPS_QUICK_REFERENCE_GUIDE

English

Product Environmental Compliance

Product Compliance

English

Barrier Strips, Dual Barrier, Wire-to-Wire, 3 Position, 9.53 mm [.375 in] Centerline, 2 Row, Operating Voltage 300 V, 22 – 12 AWG Wire Size



Product Compliance

English