



# Lithium Coin Cell - CR 2354

- Reliable energy for your application
- Standard cells and customized packs
- ESD protection
- UL recognized
- Battery Certification Experts



RoHS compliant Pb free



REACH compliant




Conflict mineral free

## Technical Data Sheet · CR 2354

### SPECIFICATIONS


Nominal Voltage	3V
Jauch part number	246539
Nominal Capacity	530 mAh
Standard Load	7.5 kΩ
Standard Current	0.2 mA
Max. Continuous Current	1 mA
Max. Pulse Current	15 mA
Operating Temperature	-30 °C to +85 °C*
Weight	Approx. 5.9 gr.
Chemistry	Li/MnO <sub>2</sub>
UL1642	MH62838

### DIMENSIONS (mm)

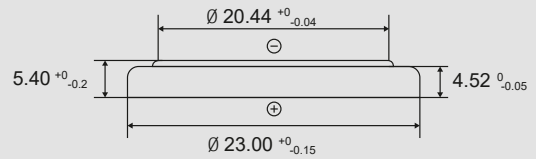


\* In applications where the battery is exposed to temperatures >60°C, please contact Jauch.


### DISCHARGE CHARACTERISTICS

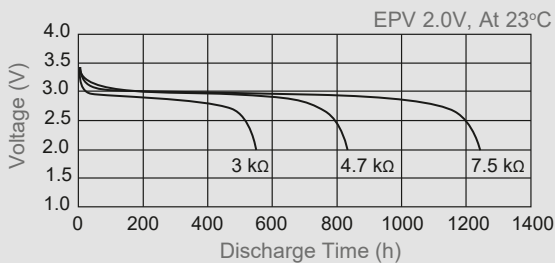


### TEMPERATURE CHARACTERISTICS

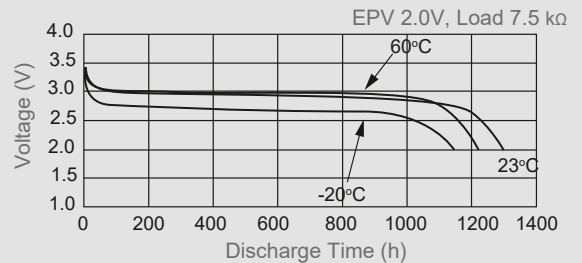

### PULSE DISCHARGE CHARACTERISTICS

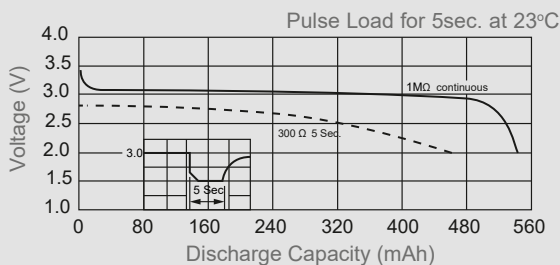

### LOAD VS: CAPACITY

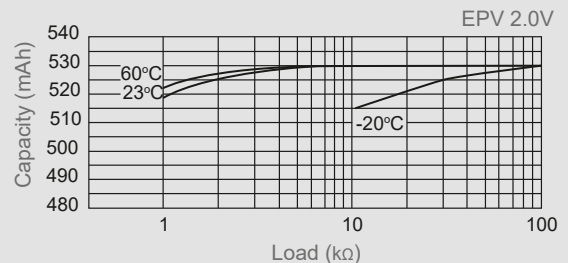

Wide assortment of mounting options, including through hole, surface mount and wire terminals. Contact Jauch for more information  
[batterytechnology@jauch.com](mailto:batterytechnology@jauch.com)