

## Single Output 200 to 250W Medical & ITE Power Supplies

<https://product.tdk.com/en/power/cus-m>  
[www.emea.lambda.tdk.com/cus200m](http://www.emea.lambda.tdk.com/cus200m)



Medical



Industrial



Test



COMM



Broadcast



With efficiencies up to 94%, the medical and ITE certified CUS200M is rated at 200W with convection cooling and up to 250W with airflow. The CUS200M is ideal for applications where audible noise cannot be tolerated, including hospital, dental, broadcast and professional audio equipment. A 5V 0.6A standby output, DC Good signal and remote on/off are provided as standard.

### Features

- 200W Convection Cooled
- Up to 250W with Forced Air
- Medical Certifications (2 x MOPP)
- Class B Conducted and Radiated EMI
- 5V Standby Voltage, DC Good Signal and Remote On/Off
- Compact 3 x 5 x 1.5" size
- Enclosure Options

### Benefits

- Quiet Operation
- Can Utilize System Airflow
- Suitable for B and BF Rated Equipment
- Easier System EMC Compliance
- Provides Flexibility in the System
- Industry Standard Size For Alternative Power Requirements
- Versatile Application

### Model Selector

Model	Nominal Output Voltage (V)	Output Adjustment (V)	Maximum Current Convection (A)	Maximum Current Forced Air (A)	Maximum Power Convection (W)	Maximum Power Forced Air (W)
CUS200M-12	12	11.7 - 12.6	16.7	16.7	200.4	200.4
CUS200M-18	18	17.6 - 18.9	11.2	14	201.6	252.0
CUS200M-24	24	23.5 - 25.2	8.4	10.5	201.6	252.0
CUS200M-36	36	35.2 - 37.8	5.5	7	198.0	252.0
CUS200M-48	48	47 - 50.4	4.2	5.3	201.6	254.4

### Options

Suffix	Description
Blank	Open frame
/A	Chassis and cover
/L	L bracket chassis

Specifications		
Model		CUS200M
<b>Input</b>		
Input Voltage Range (Operating)	Vac	85 - 265 <sup>(1)</sup>
Nominal Input Voltage Range	Vac	100 - 240 (Note: Safety certified for 90-264Vac)
Input Frequency	Hz	47 - 63 (Note: Safety certified for 50-60Hz only)
DC Input Voltage range	Vdc	120 - 370 (Note: Safety certified for AC input only)
Input Current (115 / 230Vac)	A	200W output: 2.2 / 1.1; 250W output: 3.0 / 1.5
Inrush Current (typ) (Cold Start)	A	35 at 115Vac, 70 at 230Vac
Leakage Current	µA	<300 at 265Vac, 60Hz
Power Factor (115/230VAC)	-	0.99 / 0.95
Harmonic Compliance	-	Meets EN61000-3-2 Class A
No Load Power Consumption	W	<0.5 at 230Vac (Remote on/off activated and no load on 5Vsb)
Hold Up Time (typ) at 115 / 230VAC Input	ms	16 at 200W output, 12 at 250W
Efficiency at 115 / 230VAC input 200W	%	12V: 92 / 93, 18 to 48V: 92 / 94
Conducted & Radiated EMI	-	EN55011-B, EN55022-B, FCC Class B
Immunity	-	IEC61000-4-2, IEC60601-1-2 Ed4. See immunity table
Insulation Class	-	Construction suitable for Class I installation
Safety Certifications and Markings	-	IEC/UL/ES/CSA/EN60601-1, IEC/UL/CSA/EN62368-1, 60950-1, CE Mark and UKCA Mark

Immunity				
Test	Standard	Test Level	Criteria	Notes (the power stated below is total power (main power + Vsb output))
ESD	EN61000-4-2	2 & 3	A	Level 3 air discharge only
Radiated Susceptibility	EN61000-4-3	3	A	
Electrical Fast Transient Burst	EN61000-4-4	3	A	
Surge	EN61000-4-5	3 & 4	A	Level 4 common mode only
Conducted Susceptibility	EN61000-4-6	3	A	-
Magnetic fields	EN61000-4-8	4	A	-
Voltage Dips	EN61000-4-11	Class 3	B	100 - 120VAC 200 - 240VAC
Short Interruptions	EN61000-4-11	Class 3	B	-
Voltage Dips	EN60601-1-2:2015	Class 2	A	100 - 120VAC or >160W 200 - 240VAC and <160W
Short Interruptions	EN60601-1-2:2015	Class 2	B	-
SEMI F47 Line Dip	SEMI F47	-	-	At input voltages > 200VAC

Specifications		
Model		CUS200M
<b>Output</b>		
Line Regulation	%	0.5 of nominal output
Load Regulation	%	1% of nominal output
Ripple & Noise	mV / %	180mV or 1%, which ever is the greater
Temperature Coefficient	%/°C	<0.02%/°C
Minimum Load	-	No minimum load required
Overcurrent Protection	A	12V: >17.2A, 18V: > 14.7A, 24V: > 11A, 36V: > 7.4A, 48V: > 5.5A
Overvoltage Protection <sup>(2)</sup>	V	12V: 13.2 - 16.2V, 18V: 19.8 - 24.3V, 24V: 26.4 - 32.4V, 36V: 39.6 - 48.6V, 48V: 52.8 - 64.8V
Remote Sense	-	No
Remote On/Off	-	Apply voltage to isolated terminals to shut unit down
Standby Voltage	-	5V 0.6A (convection), 1A (forced air)
Indicators	-	None
Parallel Operation	-	Not possible
<b>Environmental</b>		
Operating Temperature	°C	-20 to +70. Derate linearly to 50% load from +50 to +70 <sup>(3)</sup>
Storage Temperature	°C	-40 to +85
Humidity (non condensing)	%RH	10 - 95 (Operating & Storage)
Cooling	-	Convection or Forced Air Cooled (1.5m/s across terminals)
Altitude	m	62368-1: 5000, 60601-1: 4000 (operating)
Withstand Voltage (For 1 minute)	VAC	Input to Ground 2,000 (1xMOPP), Input to Output 4,000 (2xMOPPs), Output to Ground 1,500 (1xMOPP) Suitable for B and BF rated medical equipment
Isolation Resistance	MΩ	>100 at 25°C, 70%RH & 500VDC
Vibration (Non Operating)	-	10 - 55Hz: 19.6m/s <sup>2</sup> constant sweep 1 min X, Y, Z for 1 hour
Shock	-	< 196.1 m/s <sup>2</sup> , (20G)
<b>Other</b>		
Weight (Typ)	g	Open frame: 350, L bracket: 420, Cover: 470
Size (LxWxH)	mm	Open frame: 127 x 76.2 x 34
Size (LxWxH)	Inches	Open frame: 5 x 3 x 1.34
Connectors (JST)	-	Input (CN1): B3P5-VH(LF)(SN) (Mates with VHR-5N housing). Output (CN-51): B6P-VH(LF)(SN) (Mates with VHR-6N)
MTBF - RCR-9102B	Hours	126,383 (Telcordia calculations yield significantly higher numbers. Contact factory)
Warranty	yrs	3


Notes:

See website for detailed specifications, test methods and installation manual


See installation manual for terminal pin and hand tool information

- (1) Derate linearly to 80% load from 115 to 85Vac input. See derating curves below
- (2) Cycle AC input to reset
- (3) Models with cover (/A option) have additional derating. See derating curves below


**Outline Drawing CUS200M Series**

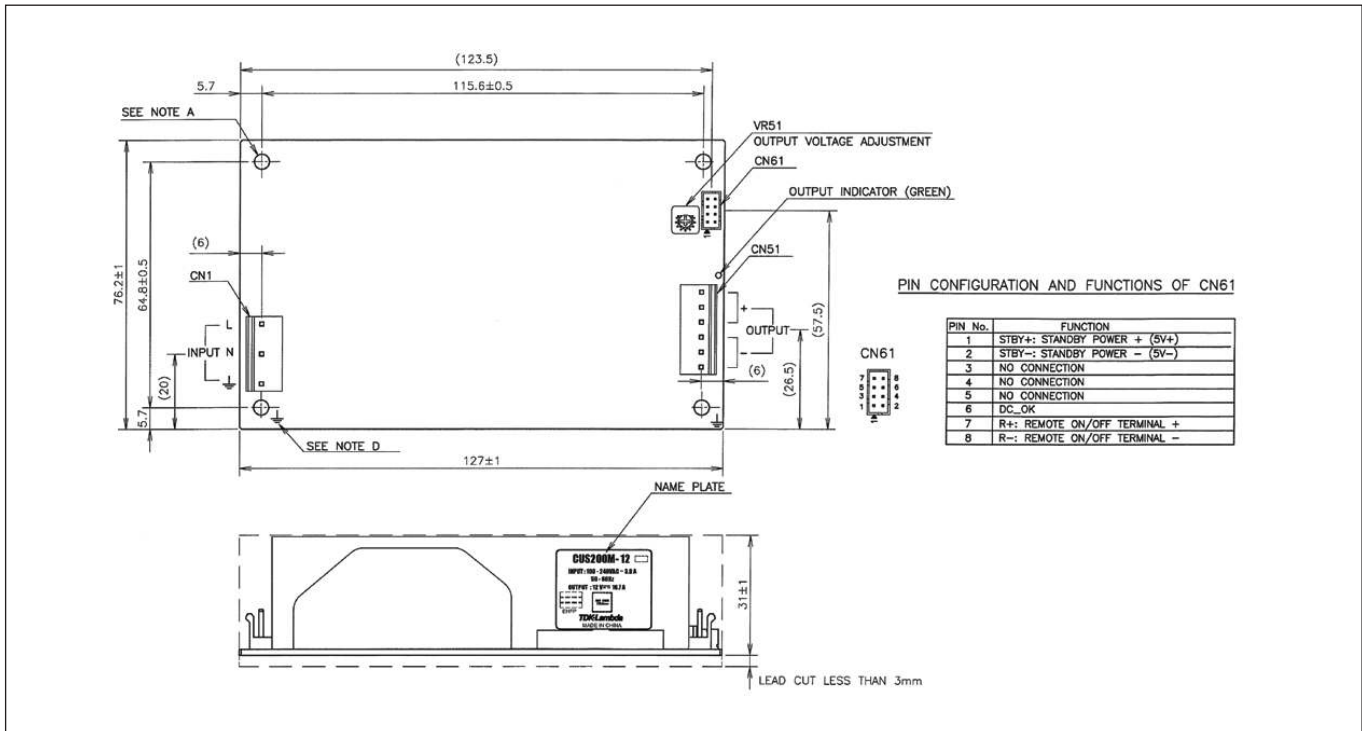

**Outline Drawing CUS200M /L**

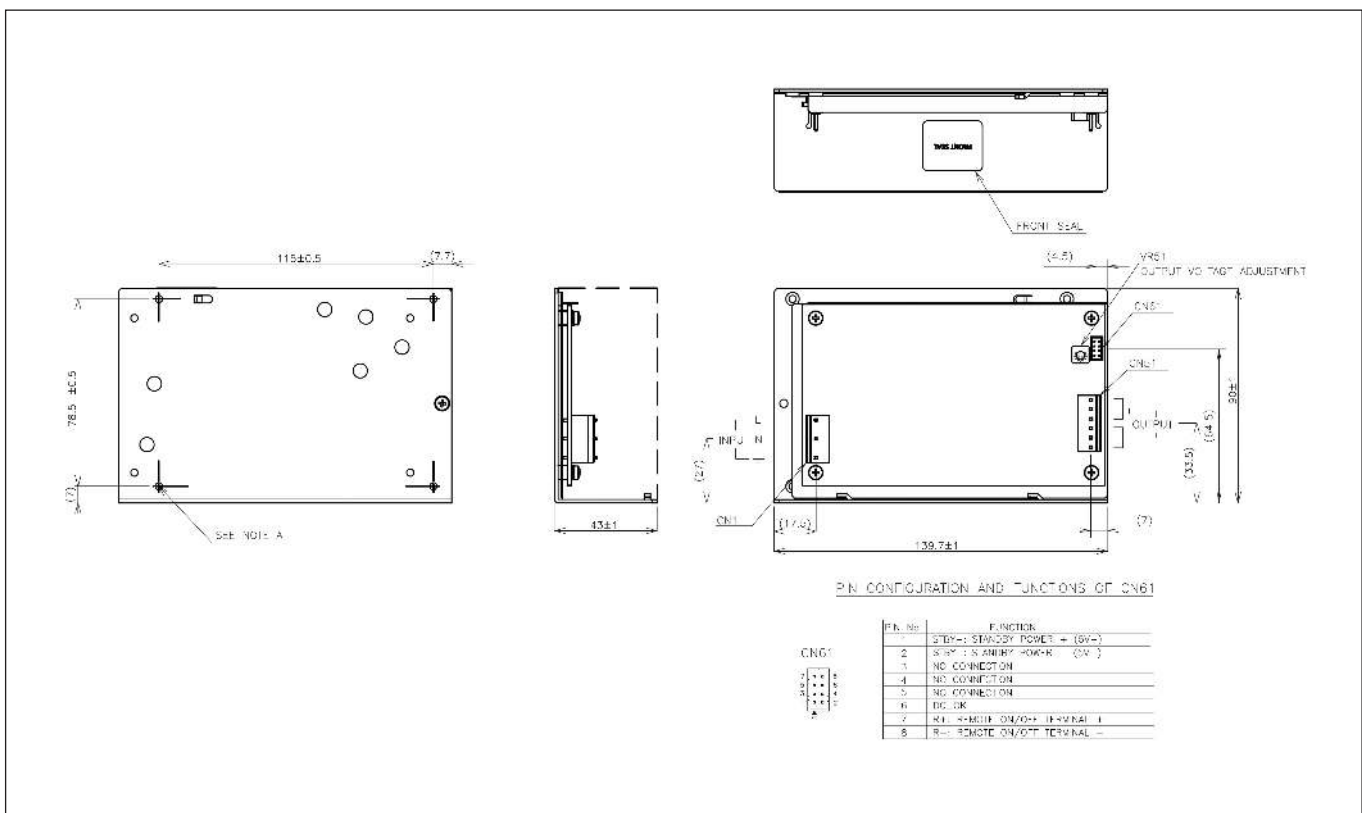


**Output Derating according to the Mounting Direction**

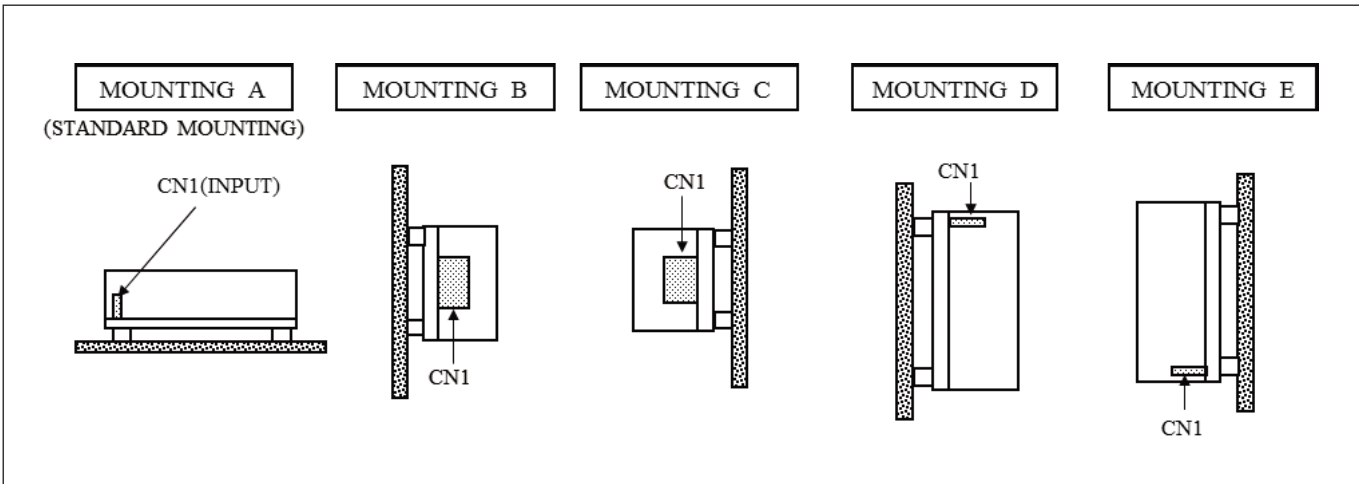


**Output Derating CUS200M-12**

Ta (°C)	MOUNTING A,B	MOUNTING C,D	MOUNTING E
	LOAD (%)	LOAD (%)	LOAD (%)
-20 - +40	100	100	100
50	100	80	80
60	75	60	60
65	63	50	-
70	50	40	-

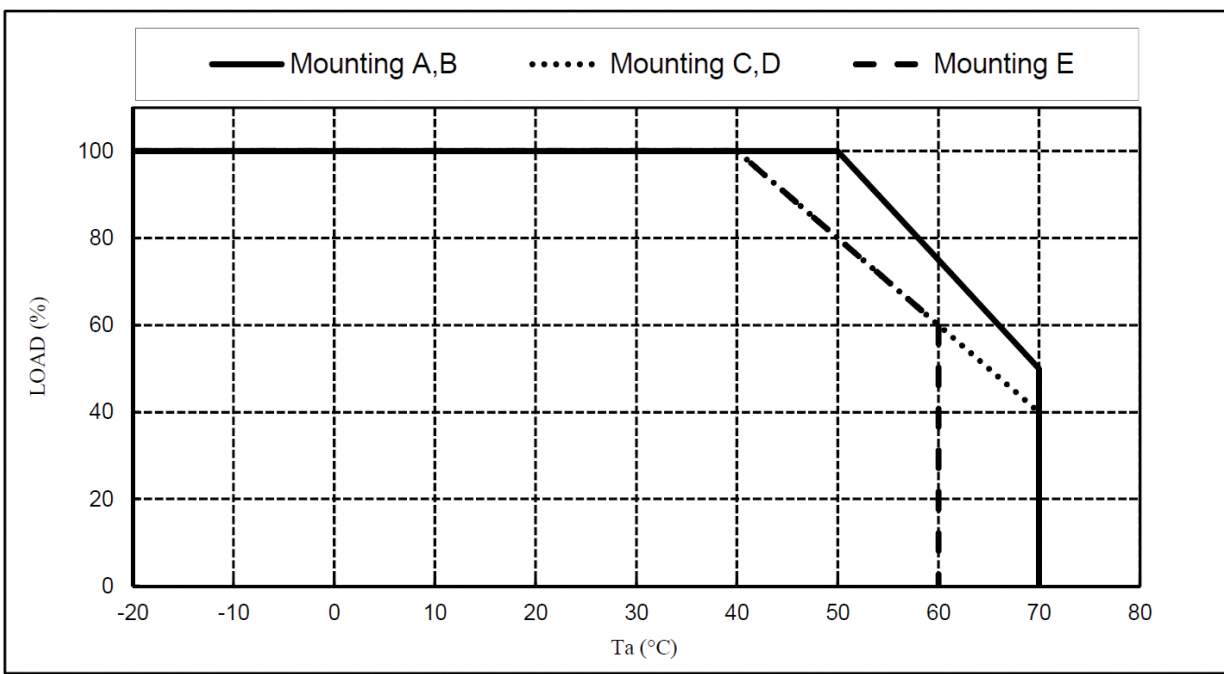


**Output Derating CUS200M-18, 24, 36, 48**

Ta (°C)	MOUNTING A,B	MOUNTING C,D	MOUNTING E
	LOAD (%)	LOAD (%)	LOAD (%)
-20 - +40	100	100	100
50	100	80	100
60	75	60	75
65	63	50	-
70	50	40	-

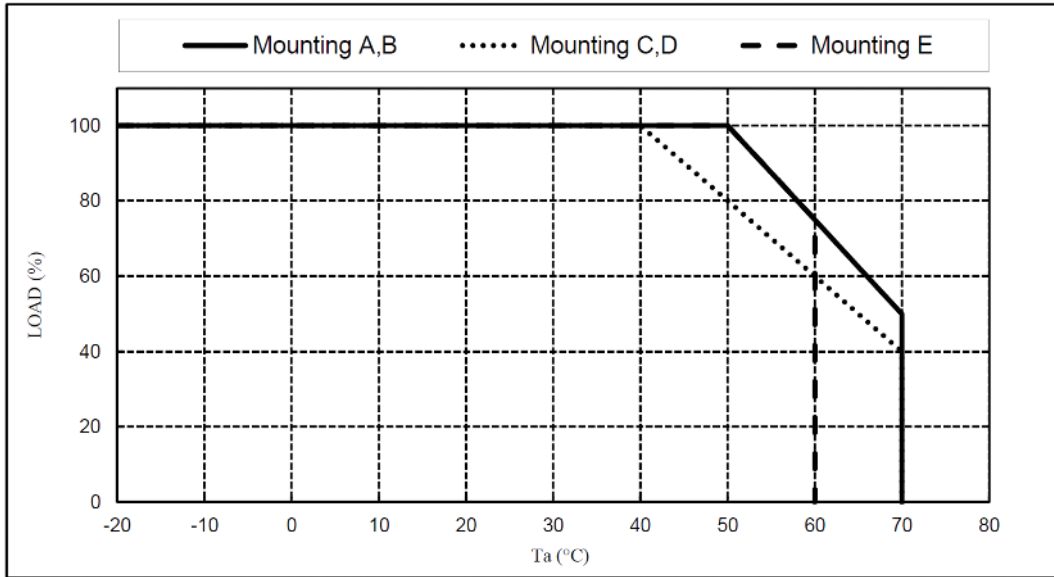


**Output Drawing CUS200M/A Series**

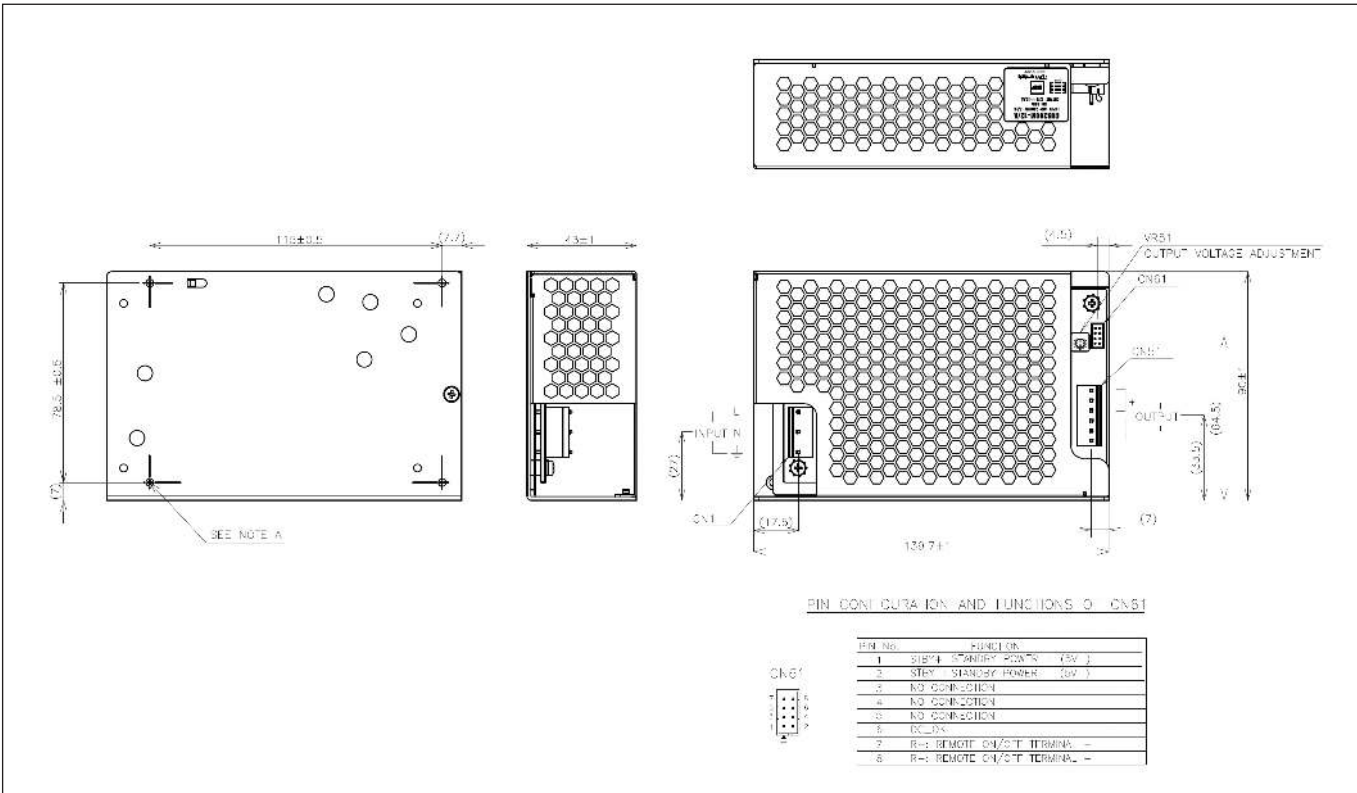


## Output Derating CUS200M/A

Ta (°C)	MOUNTING A,B	MOUNTING C,D	MOUNTING E
	LOAD (%)	LOAD (%)	LOAD (%)
-20 - +25	100	100	100
35	100	82	82
45	80	65	65
50	70	57	57
55	60	48	48
60	50	40	-

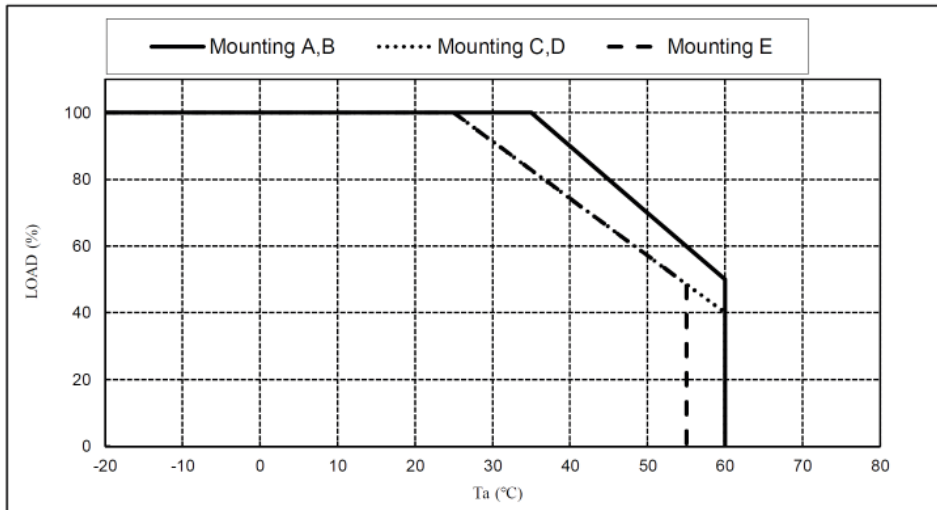

## Output Derating versus Operating Ambient Temp (Ta) CUS200M/A


\* COOLING: FORCED AIR COOLING  
FOR ALL MOUNTINGS AND ALL MODELS

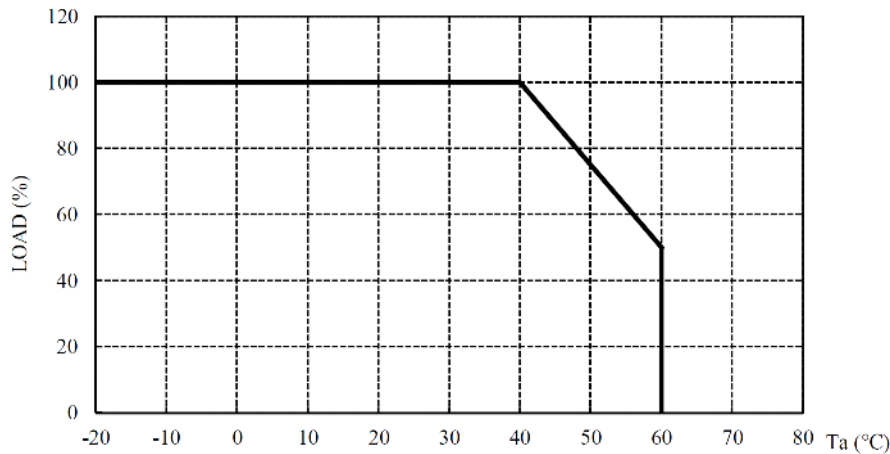

Ta (°C)	LOAD (%)
-20 - +40	100
50	75
60	50

**Output Derating versus Input Voltage (all Models)**

INPUT VOLTAGE (VAC)	LOAD (%)
85	80
115~265	100

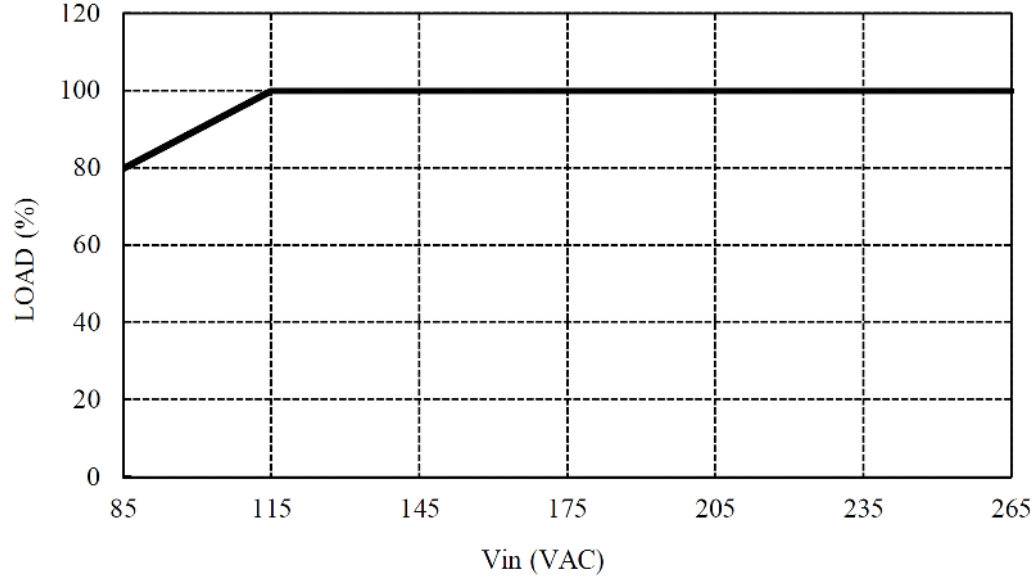





**TDK-Lambda France SAS**

Tel: +33 1 60 12 71 65  
 tlf.fr.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/fr



**Italy Sales Office**

Tel: +39 02 61 29 38 63  
 tlf.it.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/it



**Netherlands**

tlf.nl.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/nl



**TDK-Lambda Germany GmbH**

Tel: +49 7841 666 0  
 tlq.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/de



**Austria Sales Office**

Tel: +43 2256 655 84  
 tlq.at.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/at



**Switzerland Sales Office**

Tel: +41 44 850 53 53  
 tlq.ch.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/ch



**Nordic Sales Office**

Tel: +45 8853 8086  
 tlq.dk.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/dk



**TDK-Lambda UK Ltd.**

Tel: +44 (0) 12 71 85 66 66  
 tlu.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/uk



**TDK-Lambda Ltd.**

Tel: +9 723 902 4333  
 tli.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/il-en



**TDK-Lambda Americas**

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
 tla.powersolutions@tdk.com  
 www.us.lambda.tdk.com



**TDK Electronics do Brasil Ltda**

Tel: +55 11 3289-9599  
 sales.br@tdk-electronics.tdk.com  
 www.tdk-electronics.tdk.com/en



**TDK-Lambda Corporation**

Tel: +81-3-6778-1113  
 www.jp.lambda.tdk.com



**TDK-Lambda (China) Electronics Co. Ltd.**

Tel: +86 21 6485-0777  
 tlc.powersolutions@tdk.com  
 www.lambda.tdk.com.cn



**TDK-Lambda Singapore Pte Ltd.**

Tel: +65 6251 7211  
 tfs.marketing@tdk.com  
 www.sg.lambda.tdk.com



**TDK India Private Limited, Power Supply Division**

Tel: +91 80 4039-0660  
 mathew.philip@tdk.com  
 www.sg.lambda.tdk.com

