


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
H	-	B	ECR-15-010046	13JUL15	SW	RZ	

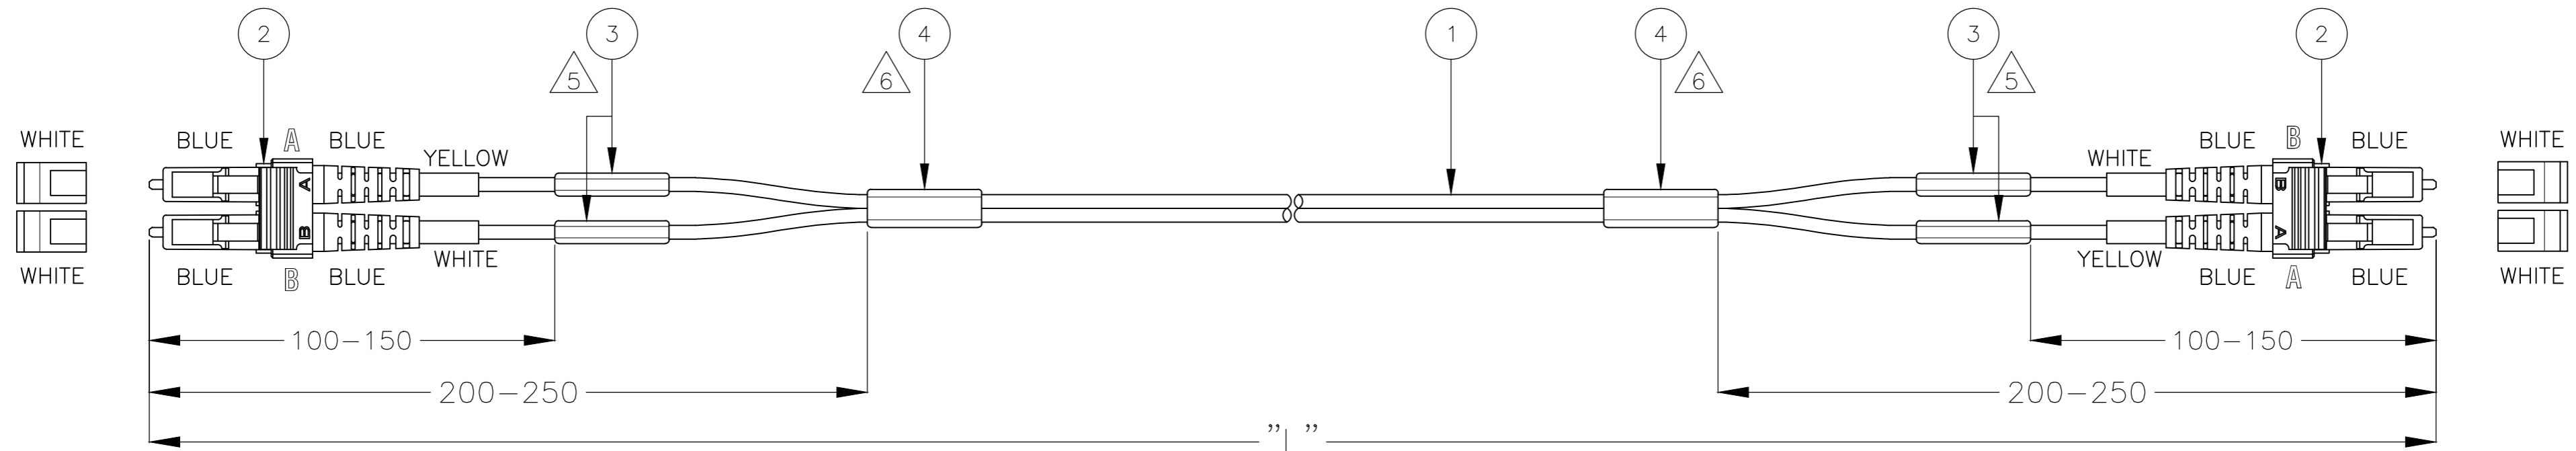


ASSEMBLY CONNECTIVITY	
LC CONN.	LC CONN.
YELLOW (A)	WHITE (B)
WHITE (B)	YELLOW (A)

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (meter)
X-2061530-Y	XY.0

NOTES:

- 1 ATTENUATION ≤ 0.3 dB, MEASURED AT 1310 nm ACCORDING TO I.E.C. 61300-3-4 INSERTION METHOD B
- 2 RETURN LOSS ≥ 45 dB, IN MATED CONDITION AGAINST REFERENCE CONNECTOR AT 1310 nm
- 3 TUNED CONNECTORS
- 4 CABLE INFORMATION:
 - CORE DIAMETER: 9/125 μ m (2x)
 - OUTER JACKET DIAMETER: 1.8 x 3.6 mm
 - OUTER JACKET COLOUR: YELLOW
 - OUTER JACKET MATERIAL: LSZH
- △5 INFORMATION ON LABEL, SEE DETAIL FOR EXAMPLE
 - BARCODE
 - UNIQUE SERIAL NUMBER
 - ASSEMBLY LENGTH
 - TE CONNECTIVITY PART NUMBER & ORDER NUMBER
 - ATTENUATION AND RETURN LOSS AT 1310 nm
- △6 BLANK LABEL
 - * ONLY ONE LABEL IN THE MIDDLE OF THE CABLE IS USED FOR LENGTHS < 0.6 METER

EXAMPLE LABEL DETAIL:

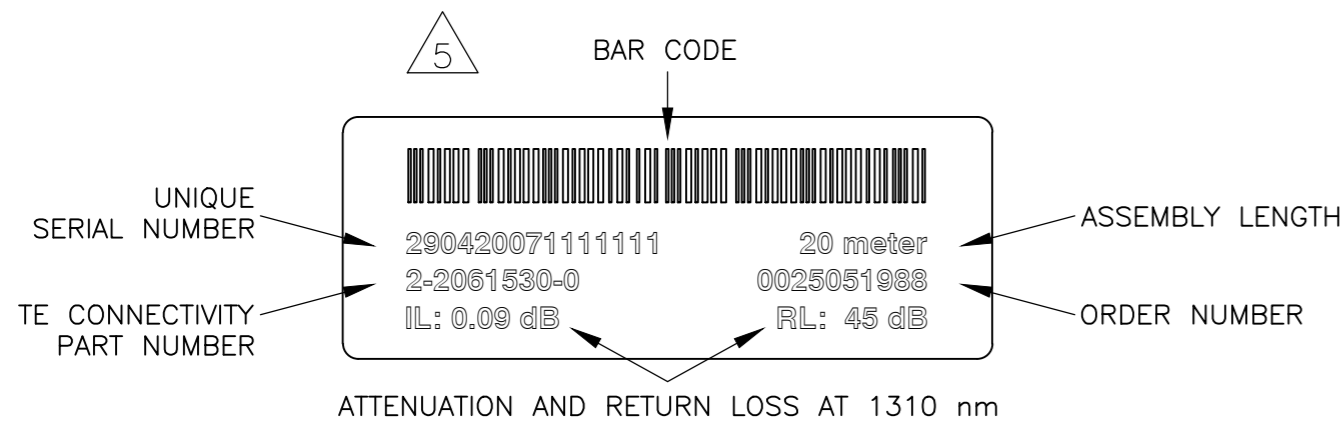

2	BLANK LABEL	4
4	INFORMATION LABEL	3
2	LC DUPLEX CONNECTOR, ULTRA SHORT, SINGLE MODE, BLUE	2
L	FOCAB 1.8MZ 9/125 G652D, YELLOW, LSZH	1
Qty	Description	Item
THIS DRAWING IS A CONTROLLED DOCUMENT.		
DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1.0 1 PLC ± 0.5 2 PLC $\pm -$ 3 PLC $\pm -$ 4 PLC $\pm -$ ANGLES $\pm -$		DWN R. COOLEN 13APR2011 CHK R. GROENEVELD 01JUN2011 APVD A. HENGELMOLEN 01JUN2011 PRODUCT SPEC APPLICATION SPEC MATERIAL FINISH
NAME: R. COOLEN NAME: A. HENGELMOLEN FIBER OPTIC LEAD 1.8MZ LC/DPX - LC/DPX ULTRA SHORT SINGLE MODE 9/125 G652D		TE Connectivity SIZE: A2 CAGE CODE: 00779 DRAWING NO: C-2061530 RESTRICTED TO: -
CUSTOMER DRAWING		SCALE: NTS SHEET: 1 of 1 REV: B