


## Features

- NPN Complements to GSBCX51,GSBCX52,GSBCX53
- Low voltage
- High current



**SOT-89-3L**

1. BASE
2. COLLECTOR
3. EMITTER

## Applications

- Driver Stages of Audio Amplifiers

## Absolute Maximum Ratings (T<sub>A</sub>=25°C unless otherwise noted)

Parameter		Symbol	Value	Unit
Collector-Base Voltage	GSBCX54	V <sub>CB0</sub>	45	V
	GSBCX55		60	
	GSBCX56		100	
Collector-Emitter Voltage	GSBCX54	V <sub>CEO</sub>	45	V
	GSBCX55		60	
	GSBCX56		80	
Emitter-Base Voltage		V <sub>EBO</sub>	5	V
Collector Current		I <sub>C</sub>	1	A
Base Current		I <sub>BM</sub>	0.1	A
Peak Base Current (tp<1ms)		P <sub>C</sub>	0.2	A
Collector Power Dissipation		P <sub>C</sub>	500	mW
Thermal Resistance From Junction To Ambient		R <sub>θJA</sub>	250	°C/W
Junction Temperature		T <sub>J</sub>	150	°C
Storage Temperature		T <sub>STG</sub>	-55 to +150	°C

**Electrical Characteristics** ( $T_A=25^\circ\text{C}$  unless otherwise noted)







Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit	
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=100\mu\text{A}, I_E=0$	GSBCX54	45	-	-	V
			GSBCX55	60	-	-	
			GSBCX56	100	-	-	
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}^*$	$I_C=10\text{mA}, I_B=0$	GSBCX54	45	-	-	V
			GSBCX55	60	-	-	
			GSBCX56	80	-	-	
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=100\mu\text{A}, I_C=0$	5	-	-	V	
Collector Cut-Off Current	$I_{CBO}$	$V_{CB}=30\text{V}, I_E=0$	-	-	0.1	$\mu\text{A}$	
Emitter Cut-Off Current	$I_{EBO}$	$V_{EB}=5\text{V}, I_C=0$	-	-	0.1	$\mu\text{A}$	
DC Current Gain	$h_{FE(1)}^*$	$V_{CE}=2\text{V}, I_C=5\text{mA}$	40	-	-	-	
	$h_{FE(2)}^*$	$V_{CE}=2\text{V}, I_C=150\text{mA}$	63	-	250	-	
	$h_{FE(3)}^*$	$V_{CE}=2\text{V}, I_C=0.5\text{A}$	25	-	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}^*$	$I_C=0.5\text{A}, I_B=50\text{mA}$	-	-	0.5	V	
Base -Emitter Voltage	$V_{BE}^*$	$V_{CE}=2\text{V}, I_C=0.5\text{A}$	-	-	1	V	
Transition Frequency	$f_T$	$V_{CE}=5\text{V}, I_C=10\text{mA}, f=100\text{MHz}$	-	130	-	MHz	

\* Pulse Test



**Classification of  $h_{FE(2)}$**

<b>Rank</b>	GSBCX54	GSBCX54-10	GSBCX54-16
	GSBCX55	GSBCX55-10	GSBCX55-16
	GSBCX56	GSBCX56-10	GSBCX56-16
<b>Range</b>	63–250	63–160	100–250

**Typical Electrical Characteristic Curves**

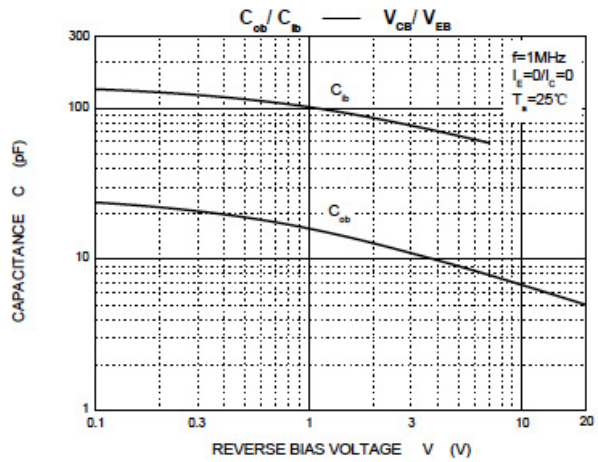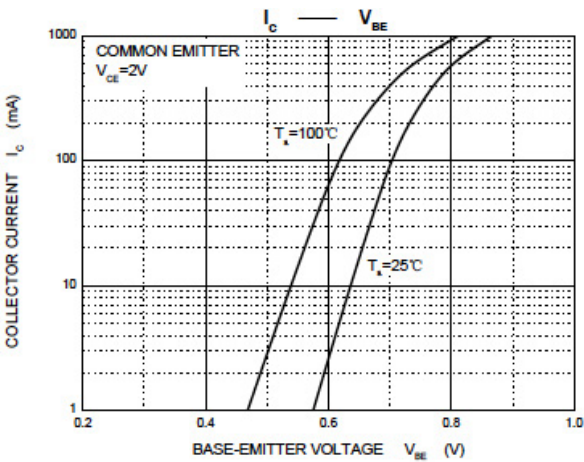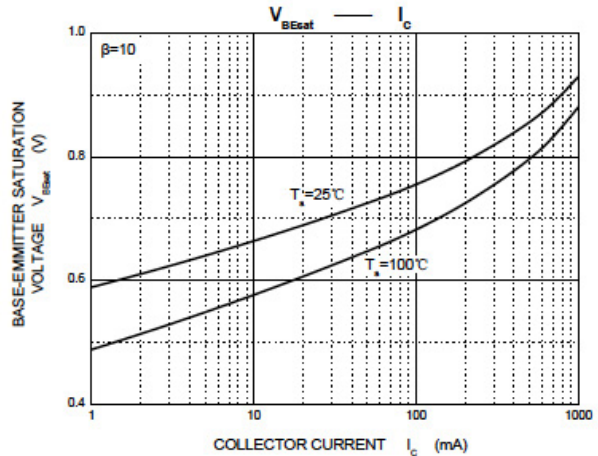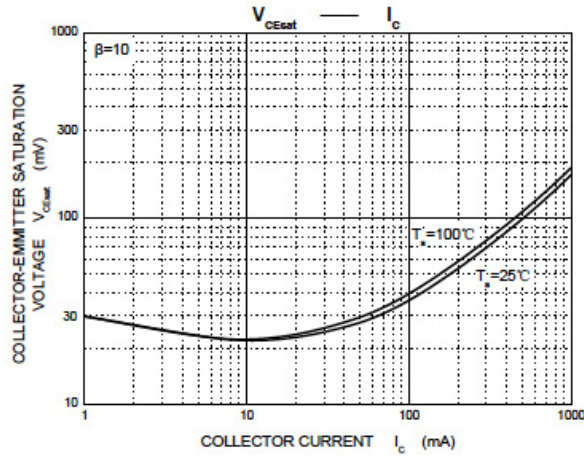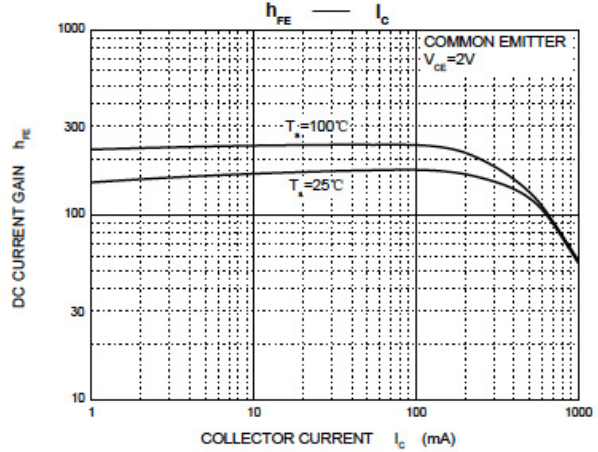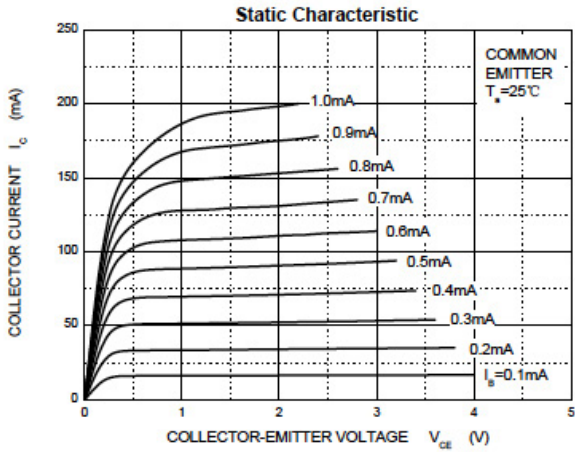


**Typical Electrical Characteristic Curves**

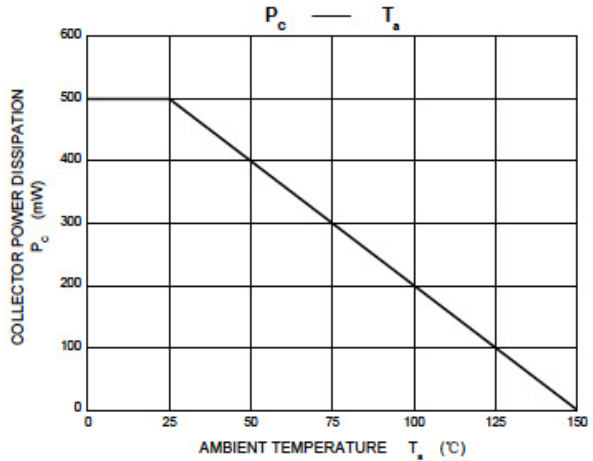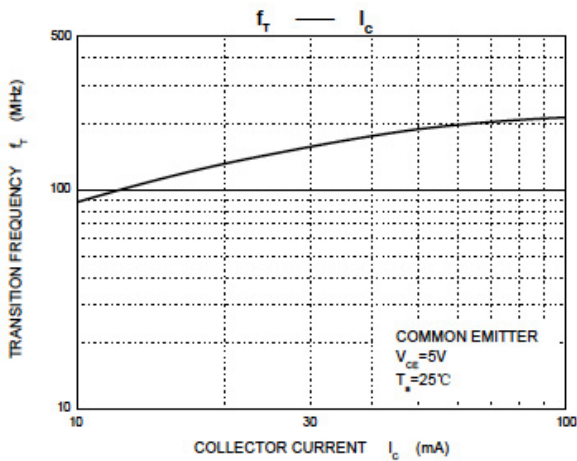


**Package Outline Dimensions**

SOT-89-3L

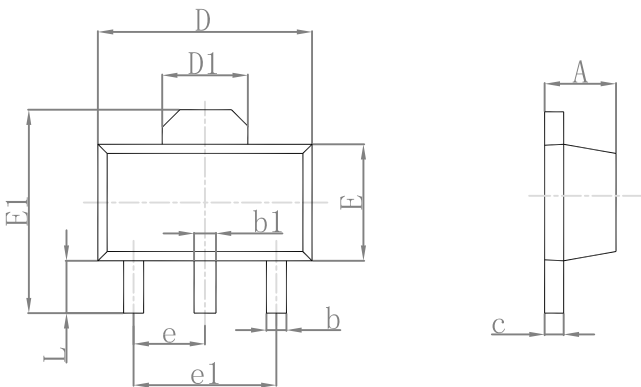

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047

**Suggested Pad Layout**

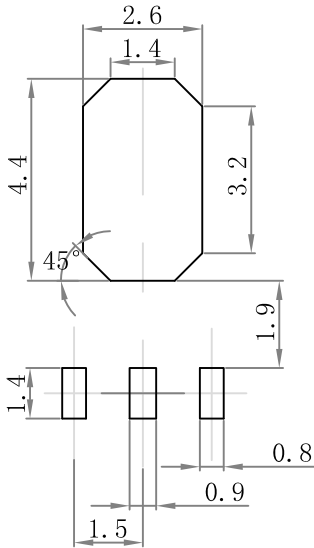

Note:  
 1. Controlling dimension: in millimeters.  
 2. General tolerance:  $\pm 0.05$  mm.  
 3. The pad layout is for reference purposes only.

**Marking and Ordering Information**

Device	Package	Marking	Quality	HSF Status
GSBCX54	SOT-89-3L	BA	1000pcs/Reel	RoHS Compliant
GSBCX54-10	SOT-89-3L	BC	1000pcs/Reel	RoHS Compliant
GSBCX54-16	SOT-89-3L	BD	1000pcs/Reel	RoHS Compliant
GSBCX55	SOT-89-3L	BE	1000pcs/Reel	RoHS Compliant
GSBCX55-10	SOT-89-3L	BG	1000pcs/Reel	RoHS Compliant
GSBCX55-16	SOT-89-3L	BM	1000pcs/Reel	RoHS Compliant
GSBCX56	SOT-89-3L	BH	1000pcs/Reel	RoHS Compliant
GSBCX56-10	SOT-89-3L	BK	1000pcs/Reel	RoHS Compliant
GSBCX56-16	SOT-89-3L	BL	1000pcs/Reel	RoHS Compliant