
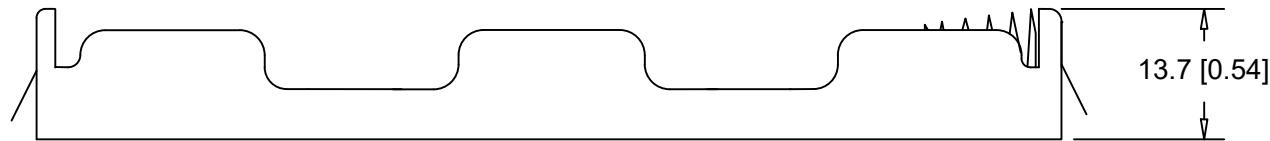



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
3/24/07	A	DIM. 107.8 WAS 107.9 DIM. 9.5 WAS 8.89 DIM. 50.2 WAS 49.5	T.B.	B.S.	
2/22/13	B	DIM. 16.00 WAS 16.20 DIM. 108.0 WAS 107.8 UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
04/21/17	C	DIM. 49.7 WAS 50.2	T.B.	B.S.	
03/07/19	D	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	

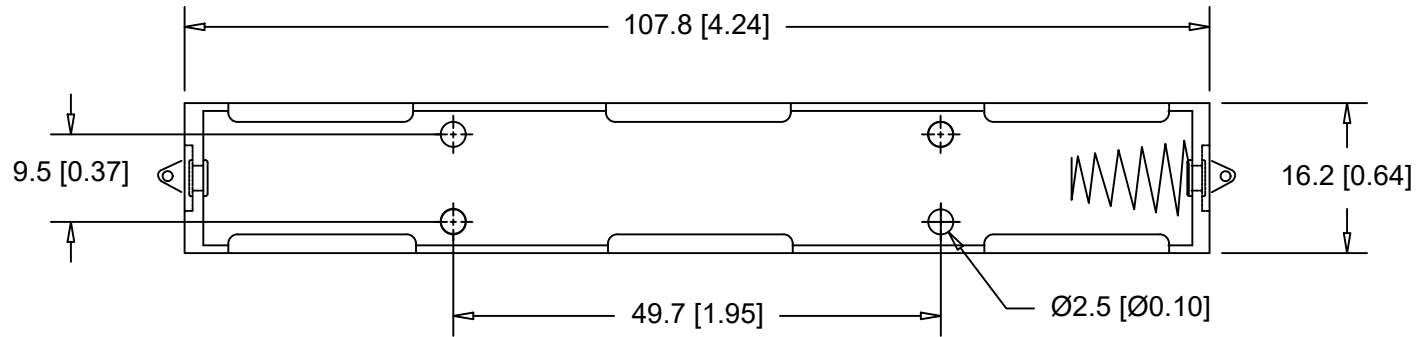

SPECIFICATIONS:

Plastic material - polypropylene, PP-1040
 Flammability rating-UL94 HB, UL file no. E216959
 Temperature Range: -10°C to +100°C
 Springs - nickel plated steel spring
 Rivets - Brass, nickel plated
 Lugs - Brass, nickel plated
 Contact resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal		Scale	Drawn By B.S.
±.5 (.020)			Approved By T.B.
Fractional	Title		
± .8 (.030)	TWO "AA" CELL HOLDER WITH SOLDER LUGS		
Angular	Date	Drawing Number	
± 3°	03/07/19	BC12AAL	