

COIL: @ 25° c

RESISTANCE 520 OHMS ± 10%

NOMINAL VOLTAGE 18.0 VDC

MUST OPERATE 9.5 VDC

MUST RELEASE .95 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS AT 20 g's


SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

\_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

CUSTOMER DATA SHEET

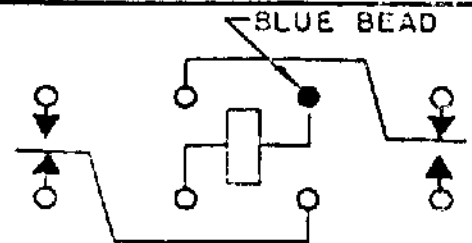

CONTACT RATING: LOW LEVEL TO  
2 A @ 28 VDC

DR 1-23-84

CK. OSW



Communications  
 Instruments, Inc.

CUST. CII STD

CUST. NO. \_\_\_\_\_

TYPE HFW RELAY

HFW 1201J00